



SOLAR DEPOT **THE INSTALLER'S CHOICE**

With Solar Depot's jobsite delivery service, you can count on your complete solar system arriving when you are ready to install. Why mess with undependable, expensive freight carriers, when you can rely us to deliver to you on our own trucks? Our promise to our customers is on-time delivery, every time.

SOLAR DEPOT **SYSTEM DESIGN MADE SIMPLE**

Solar Depot makes choosing a suitable solar system easy for you with our pre-engineered packaged systems. Utilizing our 30 years of design experience, Solar Depot makes over 100 packaged systems available to you. So, you have the freedom to choose the system that best meets the needs of your customer.



DISCOVER SOLAR WITH **SOLAR DEPOT**

If you are interested in joining the fast-growing solar industry, now is the time! Solar Depot offers intensive training workshops on solar for contractors and sales staff. We offer various workshops focused on solar electric, solar water heating, and solar pool heating. We have trained nearly 4,000 contractors on solar in the past decade. Register today for a workshop with us!

VISIT WWW.SOLARDEPOT.COM

Explore Solar Depot online! You can access our full product catalog and all of our system packages from our website. Register for a Solar Depot workshop in your area today by clicking on "Workshops." View the Contractor section to learn about our full range of services and how to become an authorized Solar Depot dealer.

(Homeowners and Business Owners Inquiries Welcome)

SOLAR DEPOT BRANCHES:

Petaluma, CA
800-822-4041

Sacramento, CA
800-321-0101

Corona, CA
800-680-7922



Register Now!

SOLAR SUCCESS! Training Event 2009



ASES NATIONAL
SOLAR
CONFERENCE

Buffalo, NY • May 11 - 16

SOLAR 2009

You've Got the Power!

SANYO



Fronius

xantrex

OutBack
Power Systems

MidNite
Solar

S-5T

Quick Mount PV

MAGNUM

Rolls

UNIRAC

GRUNDfos

SATC-H
Power Systems

AE ADVANCED
ENERGY

MORNINGSTAR
CORPORATION

Southwest
Windpower

and many other
premium vendors!

Don't miss the industry's most complete training for installers and dealers!

Designed for both experienced installers and start-ups, this powerful, multi-faceted program provides a high value training opportunity.

- | Hands-on product training
- | Flexible registration options
- | Access to over 200 exhibitors
- | Networking opportunities with industry leaders
- | NABCEP certified sessions

SOLAR SUCCESS! TRAINING EVENT

Co-located at ASES SOLAR 2009

Buffalo, New York, May 11-14

Register at www.solar2009.org

Conergy is a full-service wholesale distributor dedicated to your success.

Whether you're an experienced veteran or new to the industry Conergy is your ideal partner in the exciting world of renewable energy. Our expert professionals, dedication to our customers, value-added services, and best in class product selection ensure that projects backed by Conergy are second to none.

DISCOVER SOLAR ENERGY:

www.conergy.us | info@conergy.us | (888) 396-6611

"I was completely impressed with the scope and vision behind the Solar Success! Training Event organized by Conergy. I found every session I attended to be highly relevant and valuable to my business. I look forward to working with Conergy closely in the future."
-- 2008 Solar Success! attendee



CONERGY

OUR WORLD IS FULL OF ENERGY

LORENTZ



SINCE 1993

SOLAR WATER PUMPS

- ◆ water filled brushless DC motor
maintenance-free
- ◆ no electronics in the motor
- ◆ 12-200V DC, 110-240V AC solutions
- ◆ modular concept: pump end, motor,
controller are separate parts
- ◆ all 316 stainless steel,
not thinner than 0.16" (4mm)
- ◆ 2,000ft (600m) lift ability
- ◆ pump speed adjustable
- ◆ remote tank shut off with integrated
timer and pressure switch
- ◆ largest variety in solar industry:
helical rotor, centrifugal, vane-type,
submersible, surface or floating pump



LORENTZ



LORENTZ Germany
www.lorentz.de

Dealers: **CAP Solar Canada**, www.capsolar.com, Tel. (866) 556 8779 (toll free), Fax (403) 556 7799
GENPRO USA, www.genpro.us, Tel. (866) 593 0777 (toll free), Fax (605) 341 9918
KELIN Solar Canada, www.kelinsolar.com, Tel. (888) 731 8882 (toll free), Fax (306) 731 2774
Solar Power & Pump Co. USA, www.togosolar.com, Tel. (866) 246 7652 (toll free), Fax (580) 225 1120



What the World Needs. **NOW**®

What Do You Want? Get So Much More Than Just Quality Products! *Position Your Business for Solar Success*



- ⚙ **More** warehouses, **more** services, **more** assistance
- ⚙ **World-class service** and industry-leading training
- ⚙ Exclusive **PanelClaw** flat roof mounting system
- ⚙ **Commercial project** finance and support
- ⚙ Industry-leading **engineering** and installation support
- ⚙ Consistent **product availability** and supply

"groSolar has made it possible for us to expand into the photovoltaic business with a very short learning curve. From marketing to execution, the groSolar staff has been an invaluable resource for our company!"

— Scott Egglefield, CEO, Mirasol FAFCO Solar
and groSolar Medallion Dealer

**Ask About the Additional Support You Can Receive
With Our Exclusive Medallion Dealer Program!**


*With multiple warehouses across the U.S. and Canada,
you get quick access to product with less shipping.*



**Be a Solar Leader.
Become a groSolar Dealer Today.**

Solar Electric ⚙ Solar Hot Water
800 GO SOLAR (800.467.6527) | groSolar.com/homepower






The power behind the panel.



There's more behind Trina Solar modules than the electricity they generate from the sun: Combine a world's leading fully integrated production line with a team of highly dedicated international professionals in Technology, Quality, Sales and Service, located in each key market, and you will begin to understand the real power behind the panel. For more information, please visit www.trinasolar.com.

Trinasolar

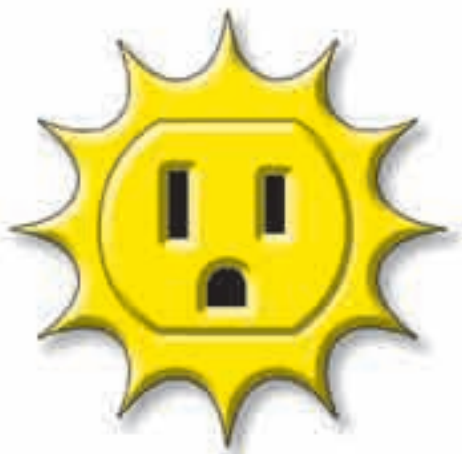

contents

April & May 2009

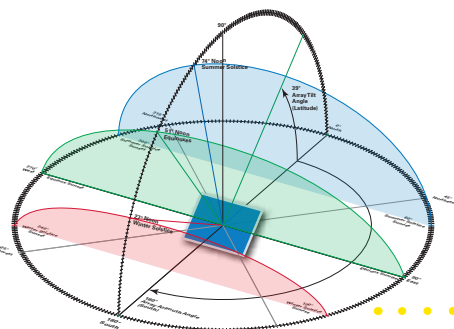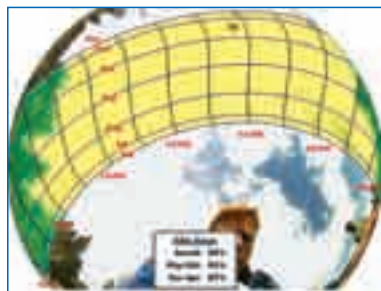

38 **building** *integrated*

Paul Mync

Building-integrated PV blurs the aesthetic division between where the home stops and the solar-electric system begins.

46 **solar** *survey*

Justine Sanchez

Shade—even just a small amount—can take a bite out of your PV array's production. Assess your solar site with these tools and tips.

52 **optimal** *PV*

David Del Vecchio

You could just "stick 'em in the sunshine," but optimizing your array's orientation and tilt will maximize its production and payoff.

58 **green** *framing*

David Johnston & Scott Gibson

Advanced framing techniques and more sustainable materials can help you construct a tighter, more energy-efficient building envelope.

66 **green** *renovation*

Laura S. Richardson

A New Hampshire couple uses their green building expertise to upgrade a century-old home to modern-day efficiency standards.



On the Cover

Sanyo bifacial PV modules provide an elegant and high-performance patio structure at this Nevada home.

Photo by Erin O'Boyle



Regulars

8 From Us to You
Home Power crew
Comfortably conservative

12 The Circuit
Home Power contributors
News, notes & gear

24 Mailbox
Home Power readers
Feedback forum

28 Ask the Experts
Industry professionals
Renewable energy Q & A

82 RE-Sources
2009 energy fairs

114 Code Corner
John Wiles
Combiners & disconnects

118 Power Politics
Michael Welch
Coal in Congress

122 Home & Heart
Kathleen Jarschke-Schultze
Re-cycling

126 RE Happenings

128 Marketplace

130 Installers Directory

135 Advertisers Index

136 Back Page Basics
Chuck Marken
Choosing a backup water heater

74 **PV** mounts

Rebekah Hren

A rundown of today's pitched roof-mounting options for solar-electric systems.

84 **wind** swap

Ian Woofenden

After disappointing performance at one site, a wind system gets relocated for a second chance, with great results.

90 **SHW** mounts

Chuck Marken

For DIYers tackling multiple solar hot water installations, homemade mounts offer design flexibility and cost savings.

96 **hydro** bio

Ian Woofenden

Big and small, Ron MacLeod has done it all in his three decades of hydro-electric experience.

102 **RE**view

Ian Woofenden

Steca's PF166 DC-only refrigerator/freezer gets put through the paces at an off-grid homestead, with energy-sipping results.

106 **EV** safety

Ken Koch

Best practices to get your electric vehicle road-ready.

Home Power (ISSN 1050-2416) is published bimonthly from offices in Phoenix, OR 97535. Periodicals postage paid at Ashland, OR, and at additional mailing offices. POSTMASTER: Send address corrections to Home Power, PO Box 520, Ashland, OR 97520.

from us to you



Comfortably Conservative

- Easy to Install
- Grid-Tie with Battery Back-up
- UPS Quality Battery Back-up
- Up to 6.0 kW of Solar
- Indoor and Outdoor Rated
- Wall or Pad Mountable

What do the Great Depression, living off-grid, and today's economic recession have in common? What can we learn from each? More than you might think.

The Great Depression lasted for the better part of a decade—long enough for people's consumption and saving habits to change, permanently. The resourceful behavior still portrayed by many Americans who lived through the Great Depression was brought about by necessity. Resources, financial and otherwise, were limited and people learned to use them wisely. Truly conservative living was the result.

Living with renewable energy, especially off-grid living, has some similarities, and some core differences as well. In the 1980s, the early adopters of solar energy tended to be cash-and-carry types. Off-grid land was inexpensive compared to purchasing property in town. Not carrying a big mortgage (or even any mortgage) was often the result. Homesteads were built slowly as money became available. RE systems typically grew slowly too, module by module. The idea of being deep in debt ran counter to the sustainable and independent-minded ethics many off-gridders held, and still hold today.

Most people drawn to simple off-grid lifestyles choose to do so willingly, not out of necessity. But just like Depression-era individuals, they learn to live within limits when it comes to resource use. During sunny days, with the batteries fully charged, appliance use grows. When the funky weather sets in, usage slows. Living off-grid forms habits that quietly make their way into other aspects of our lives. Don't spend what you don't have. There are consequences. Resources are finite.

So what does all this have to do with today's economic recession? At its core, our nation's current economic trouble is caused by people spending what they don't have, as well as the financial institutions that have made it enticing for people to do so. Instead of cash and carry, we have credit and carry. It's textbook unsustainable behavior and the consequences are apparent wherever we look. Even more unsettling is what happens when consumer habits do undergo a rapid and widespread change from spending to saving—the economy stalls out.

Most of my neighbors are off-gridders. We live in small but comfortable houses we built ourselves on land that was cheap. We don't have utility bills. When we talk over the fence, we share stories of friends and acquaintances who have been hit hard by the economic downturn. From time to time, the conversation turns to what might be in store for us down the road. But in general, the comfortably conservative lifestyles we've chosen make things less precarious. Friends who have built similarly sustainable lifestyles in town echo this attitude. Living with solar energy is our daily reminder to keep it simple, live within our limits, and to enjoy the abundance when spring, like it always does, comes around.

—Joe Schwartz for the *Home Power* crew

Think About It...

*"We will harness the sun and the winds and the soil
to fuel our cars and run our factories."*

—Barack Obama, 44th U.S. president



www.outbackpower.com/smartre



The SMART Renewable Energy Solution.

Simplified Grid-Tie With Back-Up Power.

The SmartRE is the newest development from OutBack Power Systems, simplifying grid-tie solar with battery back-up and drastically reducing installation times compared to other battery based systems. Rated for both indoor and outdoor installations the SmartRE is either wall or pad mountable and provides customers the peace of mind that power will be available when they need it most. For use in systems up to 6.0 kW the SmartRE is the SMART choice for grid-tie with battery back-up.



www.outbackpower.com/smartre

affordable solar

visit www.affordable-solar.com
call 1 (800) 810-9939



Our Mission

- providing the highest quality solar energy solutions
- empowering individuals, communities, & businesses
- creating a sustainable future and clean energy economy

Why Choose Us?

- 10 years in the business



- 90+ years of experience with our staff & technicians
- 10,000+ systems delivered
- BBB - Accredited Business



A+ Rating
HIGHEST RATING

- Pre-screened Solar Pro



Independence You Can Afford



Independently Published Since 1987

<i>Publishers</i>	Richard & Karen Perez
<i>Executive Editor & CEO</i>	Joe Schwartz
<i>Managing Editor</i>	Claire Anderson
<i>Art Director</i>	Ben Root
<i>Senior Editors</i>	Michael Welch, Ian Woofenden
<i>Technical Editors</i>	Justine Sanchez, Roy Butler, Erika Weliczko
<i>Associate Editor</i>	Kelly Davidson
<i>Graphic Artist</i>	Dave Emrich
<i>Solar Thermal Editor</i>	Chuck Marken
<i>Building Technology Editor</i>	Rachel Connor
<i>Transportation Editors</i>	Mike Brown, Shari Prange
<i>Columnists</i>	Kathleen Jarschke-Schultze, Michael Welch, John Wiles
<i>Advertising Manager</i>	Connie Said
<i>Advertising Director</i>	Kim Bowker
<i>Chief Information Officer</i>	Rick Germany
<i>Operations Director</i>	Scott Russell
<i>Data Manager</i>	Doug Puffer
<i>Customer Service & Fulfillment</i>	Jacie Gray, Shannon Ryan

Copyright ©2009 Home Power Inc. All rights reserved. Contents may not be reprinted or otherwise reproduced without written permission. While *Home Power* magazine strives to publish only safe and accurate content, we assume no responsibility or liability for the use of this information.

Interior paper is made from 85%–100% recycled material, including 20%–30% postconsumer waste.

Contact Us...

Subscriptions

To subscribe, renew, change, or inquire about a subscription:

800-707-6585 or 541-512-0201

subscription@homepower.com

www.homepower.com/subscribe

Back Issues

Many of our back issues are available in print and/or online in Adobe PDF. Our first 120 issues are also compiled on DVD-ROM. More information at:

www.homepower.com

Order online or by phone:

800-707-6585 or 541-512-0201

Submissions

For inquiries and information related to editorial submissions, write to us at:

submissions@homepower.com

www.homepower.com/writing

Marketing

Promotional opportunities and offers:

marketing@homepower.com

Ask the Experts

To have your technical questions considered for publication, send them to:

asktheexperts@homepower.com

Web Site

www.homepower.com

Send your comments and suggestions regarding the site to:

web@homepower.com

Advertising

For inquiries and information related to advertising in *Home Power* or on www.homepower.com, contact:

**connie.said@homepower.com
541-512-0201**

**kim.bowker@homepower.com
541-858-1791**

www.homepower.com/advertising

Letters to the Editor

E-mail your comments and suggestions to us at:

mailbox@homepower.com

or write to the address below.

Home Power magazine • PO Box 520 • Ashland, Oregon 97520 • USA

home power 130 / april & may 2009

Residential Solar

asg power

Everything you need to get started.



ASG Power 120W GT Kit

Features an SMA Sunny Boy 700U and Kaneka GSA 60W 48V panels.

Our Price: \$1,969.⁰⁰

ASG Power 175W GT Kit

Features an Enphase Micro-Inverter M175 and Sharp NT-175U1, monocrystalline panel.

Our Price: \$1,639.⁰⁰



ASG Power 1.0kW GT Kit

Features a Fronius Inverter IG 2000 and Sanyo HIP-195BA19, HIT 195W panels.

Our Price: \$6,439.⁰⁰

ASG Power 3.0kW GT Kit

Features an SMA SB 4000US, 4000W Inverter and Schüco 180-SPU-4 180W 16V panels.

Our Price: \$16,479.⁰⁰

asg power plus More kits available up to 10kW.



affordable solar

Independence You Can Afford

visit **www.affordable-solar.com**

call **1 (800) 810-9939**

Request a free quote, speak with a Solarian, or start with our grid tie or off grid solar estimators.

Dealers Welcome!
Special pricing for repeat and large orders.



Panels by the Pallet

HUGE Inventory In stock & Ready to Ship!

Call **1(800) 810-9939**
for more information

Discounts available for several pallets.
Supplies are limited.

Pallet quantity varies by manufacturer, please call us for more details. If there is another panel that interests you but it's not listed here, please contact us.

evergreen solar

SHARP

KYOCERA



kaneka

SUNTECH


Featured Panels by the Pallet



Evergreen Solar

ES-A-210-f2a	\$863.⁰⁰	\$4.11/watt
ES-A-205-f2a	\$832.⁰⁰	\$4.06/watt
ES-A-200-f2a	\$812.⁰⁰	\$4.06/watt

*Pallet pricing



Kyocera

KD205GX-LP	\$797.⁰⁰	\$3.89/watt
KD180GX-LP	\$722.⁰⁰	\$4.01/watt
KC130TM	\$519.⁰⁰	\$3.99/watt
KC85T	\$389.⁰⁰	\$4.58/watt
KC50T	\$231.⁰⁰	\$4.62/watt

*Pallet pricing



Sharp

ND-V230A1	\$1,012.⁰⁰	\$4.40/watt
ND-224U1F	\$950.⁰⁰	\$4.24/watt
ND-216U1F	\$862.⁰⁰	\$3.99/watt
NT-175U1	\$688.⁰⁰	\$3.93/watt

*Pallet pricing

More Panels by the Pallet



Suntech Power

STP175S-24Ab-1 175W 24V Panel

Our Price: \$698.⁰⁰ \$3.99/watt

*Pallet pricing



REC Solar

SCM220 220W 20V Panel

Our Price: \$862.⁰⁰ \$3.92/watt

*Pallet pricing



Sanyo

HIP-200BA19, HIT 200W Panel

Call for Pricing

*Pallet pricing



Enphase Micro-Inverter

M200-32-240-S01/2

Our Price : \$ 215.⁰⁰



Outback Flexmax 80

Charge Controller

Our Price : \$ 580.⁰⁰



Morningstar Sun saver

SS-MPPT-15L Charge Controller

Our Price : \$239.⁰⁰



Southwest Windpower

Air-X Land 12V Wind Turbine

Our Price : \$699.⁰⁰



SMA SB 7000US

7000W inverter

Our Price : \$4,108.⁰⁰



Xantrex XW6048-12/240-60

Hybrid Inverter Charger

Our Price : \$ 3,656.⁰⁰



Magnum Energy

Inverter MS4448AE

Our Price : \$2,080.⁰⁰



Fronius IG Plus 5.0-1 uni

5000W, 208/240/277VAC Inverter

Our Price : \$4,262.⁰⁰



Grundfos SQFlex

Solar Water Pump 11 SQF-2

Call for design solution

residential solar | off grid solar | commercial solar | industrial solar | portable solar

*Please note pricing and availability subject to change in this crazy market

Renewable Energy Support in the White House

Hope for renewable energy is running at an all-time high with President Barack Obama's picks for his energy and environment squad. The team is diverse in both public service records and personal biographies, and many environmentally concerned citizens will be looking for this "dream green team" to provide decisive action on climate change and push RE technologies to the forefront of U.S. energy policy. Here's a roster of movers and shakers who are set "to prepare the nation for a new age."

Secretary of Energy—Steven Chu

The Job: Head the U.S. Department of Energy; serve as the President's principal adviser on energy policies, plans, and programs.

Credentials: Obama dipped into the academic world to nominate Steven Chu for Secretary of Energy, a challenging role that supervises the sprawling Department of Energy's nuclear weapons supply and nearly every other aspect of government regulation and information about energy supply and infrastructure. Chu is a physicist and Nobel Prize winner who should be up to the task. Since 2004, he's been at the helm of the Lawrence Berkeley National Laboratory, leading studies in advanced biofuels, artificial

public statements, the secretary only slightly stepped back from his bold words and clarified, "If the world continues to use coal in the way we're using it today...that's a pretty bad dream." While his stance in support of renewable energy is heartening, Chu has his detractors. Critics express concern that the professor lacks the necessary inside-the-Beltway experience and political savvy to be a major player in the cabinet, and question his support for the \$18.5 billion in new reactor loan guarantees already approved.

EPA Administrator—Lisa Jackson

The Job: Head the U.S. Environmental Protection Agency; set standards that safeguard the nation's air, water, and land.

Credentials: A chemical engineer from New Orleans, Jackson has more than two decades of experience as an environmental regulator. She spent much of her early career with the EPA's New York regional office, managing various

Hope for renewable energy is running at an all-time high with President Barack Obama's picks for his energy and environment squad.

photosynthesis, and other solar energy research. He's been quoted as saying that coal is his "worst nightmare." Even after grilling from the confirmation committee on his



Used with the permission of Matt Wueker & the Cartoonist Group

enforcement programs and overseeing cleanup of hazardous waste sites under the Superfund program. During her 33 months as the commissioner of the New Jersey Department of Environmental Protection, she conducted compliance sweeps to crack down on polluters and established goals for reducing the state's carbon emissions. Where renewable energy and alternative transportation are concerned, she is refreshingly outspoken. In 2007, she announced that the Garden State would join other states in suing the Bush administration for its ruling that prevented states from enacting tougher fuel-efficiency standards. She openly condemned her future employer, saying the EPA was more like "the Emissions Permissions Agency."

However, Jackson is not without some baggage: Critics claim she is too close to industry and moved too slowly on her 2006 pledge to clean up New Jersey's toxic waste sites.

Chairwoman of the White House Council on Environmental Quality—Nancy Sutley

The Job: Ensure a safe, healthy environment for all citizens.

Credentials: This Californian has more than 10 years of policy-making experience in the Golden State concerning energy and water issues. Sutley presently works as the Los Angeles Deputy Mayor for Energy and Environment. Her priority in the new administration will be to the EPA, where her past experience in budget and legislative affairs as a special assistant to the EPA administrator in Washington, DC, will be put to the test once again at the federal level. Also notable were her sharp inquiries about the Federal Energy Regulatory Commission's oversight of California's unstable electricity markets, which led to new policy requiring Los Angeles to produce 20% of its energy from renewable sources.

White House Coordinator of Energy and Climate Policy—Carol Browner

The Job: Energy and climate czar

Credentials: Browner is no stranger to federal environmental work: she was EPA administrator during the Clinton administration and her ties to government stretch back to the early 1980s, when she served as General Counsel for the Florida House of Representatives. She eventually worked her way up to the position of Florida's secretary of environmental regulation. As the "White House Energy Czar," a new position in the administration, she'll be drawing on her private sector experience consulting for The Albright Group LLC, where she developed partnerships with business leaders and community advocates. She is likely to immediately overturn the Bush administration's denial of California's wish for clean air laws that are stronger than the Federal Clean Air Act—the auto industry is quaking in its boots.

LaHood-Winked?

During his presidential campaign, Obama focused on how America must combat urban sprawl with smart growth. So it's not surprising that progressive transportation advocates are up in arms over the appointment of Republican Ray LaHood of Illinois for Transportation Secretary.

The Congressman has no real expertise or background in transportation policy—let alone with smart growth or transit-oriented development. To his credit, he did break with his party to expand Amtrak and spoke out against its privatization. Sadly, that's the high point of his voting record, which earned an underwhelming lifetime voting score of 27 from the League of Conservation Voters. To make matters worse, one of LaHood's largest campaign donors was the Caterpillar Corporation—yes, the same folks that lobby for highway expansion projects.

While Obama has been clear in his desire to improve transportation infrastructure, it seems that he missed the mark with this bipartisan appointment, neglecting the critical links between transportation, land use, and climate change.

Deputy Assistant to the President for Energy & Climate Change—Heather Zichal


The Job: Address climate change policy

Credentials: Before being tapped for the transition team, Zichal spent time as the Obama campaign's policy director for energy, environment, and agriculture. Most of Zichal's experience comes from her seven years serving members of Congress. She served as legislative director to Senator John Kerry, where she coordinated domestic and foreign policy, as well as the environmental policies on the Senator's failed presidential bid in 2004. Her time on the Hill was spent on legislative initiatives to create green jobs, address climate change, reduce dependence on oil, and protect natural resources like the Arctic National Wildlife Refuge. She will work closely with Browner to coordinate this new office within the White House, where they will build on Obama's inaugural promises to roll back the specter of a warming planet.

—Kelly Davidson



making renewable do-able™

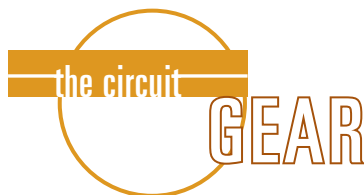

Trojan Releases New Battery Line for RE Systems

Last fall, **Trojan Battery Co.** (www.trojanbattery.com) released its new RE Series battery, designed specifically for renewable energy charging sources such as photovoltaic arrays, wind generators, and microhydro turbines.

The new series has three models: L16RE-2V (1,110 Ah at the 20-hour rate; 2 V nominal), L16RE-A (325 Ah at the 20-hour rate; 6 V nominal) and the L16RE-B (370 Ah at the 20-hour rate; 6 V nominal). New features include higher charge efficiency, a 10-year design life, a 30% thicker separator, and a rugged Polyon case.

All models come standard with L-style terminals and a seven-year limited warranty. The introduction of Trojan's large-capacity, 2 V battery design minimizes the number of parallel battery strings required, which promotes a more even distribution of charge and discharge across the battery bank.

—Justine Sanchez

Hands-on Workshops for PV & Solar Thermal Installations

Upcoming Classes in Hudson, MA

Photovoltaic Design & Site Assessment

- April 20-24
- August 17-21

Advanced Photovoltaic Design and Installation

- April 27-May 2
- August 24-28

Solar Hot Water Design & Installation

- May 26-29
- September 15-18

Classes taught to NABCEP task analysis. Some classes also available in Columbus, OH. Full classes schedule and information on-line now!



Courtesy www.trojanbattery.com

Spring Into RE!

Start Planning Your RE System Today



making renewable do-able™

Learn & Shop at:

altEstore.com/HP130

Get an **Extra Discount!**
Mention this code: **HP130**
when you order today!

AltE™ is the Do-It-Yourselfer's supplier of renewable energy goods. We provide you the tools, education and technical knowledge you need to safely and successfully put together your own system. Join our fun and enthusiastic community of DIY'ers today!

Call:

877.878.4060 or 978.562.5858

Visit:

www.altEstore.com/HP130

Categories:

- Batteries
- Books, Classes & Webinars
- Cables & Wiring
- Charge Controllers
- Composting
- DC Voltage Converters
- Enclosures, Electrical & Safety
- Energy Efficient Products
- Hydropower
- Inverters
- Kits & Package Deals
- Lighting & Fans
- Meters, Communicat., Site Analysis
- Open Box / Returned to Stock
- Overstock, Closeouts, Clearance!
- Portable Power
- Power Panels
- Solar Air Heaters
- Solar Panels
- Solar Pool Heating & Pumps
- Solar Trackers, Solar Panel Mounts
- Solar Water Heaters
- Solar Water Pumps
- Wind Turbines

store

Visit www.altEstore.com/HP130 to begin your AltE™ journey today!



Solar Electric Systems

Whether you want to go off grid, lower your electric bill or protect the environment, we can help you design a solar electric system for almost any need. Kits, panels and panels by the pallet and more!



Wind Electric Systems

Do you have at least a ½ acre of land and average wind speeds of over 10mph? Reduce your electricity bill and increase your energy independence with a wind electric system!



Solar Thermal

One of the most economical forms of renewable energy, solar thermal systems have faster payback than any other solar technology! We have your solar air, solar hot water and solar pool heating system solutions!

university



Homeowners Series

Columbus, OH and Hudson, MA

- Solar Electric
- Solar Heating
- Residential Wind
- Renewable Energy Basics

Visit altEuniversity.com/classes for classes schedule and information.



Installation Series

- Photovoltaics: April 20 - May 1; August 19-28
- Solar Hot water: May 26 - 29; September 15-18
- And more!

Classes taught to NABCEP task analysis
New schedule on line now!

community

Forums



Customer Gallery



Customer Stories



Courtesy www.enerworks.com

EnerWorks Gets the Star

EnerWorks (www.enerworks.com), a Canadian solar water heating manufacturer, has just announced its qualification for the new Energy Star residential solar water heater program. EnerWorks's solar collectors and pre-engineered systems are also certified by the Solar Rating and Certification Corporation, a requirement for the federal 30% solar tax credit. One of the company's collector models, the COL-4x8-TL-SG1-SD10, includes a patented temperature-limiting device that vents excess heat. This feature is designed to minimize or eliminate the effects of overheating during a typical summer vacation of two to three weeks without hot water use. A thermally actuated spring inside the collector operates the overtemperature-protection device, which opens an air baffle at the top of the collector, venting hot air from inside the collector and maintaining the heat-transfer fluid at approximately 260°F.

The average U.S. household spends \$400 to \$600 per year on water heating—the second largest energy expenditure behind heating and cooling. U.S. tax credit legislation requires that a residential solar water heater cut water heating costs by at least 50% to qualify for the credit.

Flexible Tubing Makes for Easier Solar Hot Water Installations

If soldering copper tubing is a challenge or you just want a quicker piping job, **Thermo Technologies'** (www.thermomax.com) **Easyflex** stainless steel tubing may be what you're looking for. Their insulated Solar Line tubing has a working temperature of 350°F and the 50-foot rolls are manufactured in ½-inch to 1-inch sizes. The UV-resistant insulation has an R-value of 4.8 and the return line includes a sensor wire. Brass fittings with a silicone sealing ring and nylon gaskets include couplings, tees, and adapters for threaded pipe or copper tubing. Bends are easy with the flexible tubing and a pair of adjustable wrenches is all that's needed to tighten the fittings.

—Chuck Marken



Courtesy www.thermomax.com

green never felt so good

Apricus is creating the new standard in evacuated tube technology—putting affordable solar thermal in the hands of consumers all over the world.

From complete turn-key systems, to individual components, Apricus systems deliver reliable thermal energy no matter what the climate or time of year.

Making a choice for your thermal system has never been easier, and we stand behind our systems and components every step of the way.

With Apricus, helping your customers go green has never felt so good.

www.apricus.com **Apricus**
SOLAR HOT WATER



RE Primers

Jump-start your renewable energy education with these time-tested tomes written by experienced RE users.



Want to live with solar electricity?

For a classic read on all aspects of solar-electric homes, check out Joel Davidson and Fran Orner's *The New Solar Electric Home* (AATEC Publications, 1987). Now in its third edition, the book uses plain language and easy-to-understand tables to walk you through the process—from sizing and selection to installation

and maintenance. View the complete table of contents and purchase at www.solarsolar.com.



Want to install your own system?

Get down to the nitty-gritty of PV system design and installation with Solar Energy International's *Photovoltaics: Design & Installation Manual* (New Society, 2007). Go step-by-step through system design and installation, and test your know-how with exercises throughout. The 112-page appendix—with a glossary, solar

data, sun charts, and system sizing formulas—is an excellent go-to resource. www.solarenergy.org.



Want to build a wind turbine?

Building a wind generator is not simple, but the best instructions can be found in Hugh Piggott's *A Wind Turbine Recipe Book*. Piggott's book gives a real-world account of what it takes to build and operate a wind generator. Find the U.S. measurements edition at www.scoraigwind.com.

Well Read

Powell's Books, one of the nation's largest booksellers, is greening its operations with a roof-mounted, 100-kilowatt solar-electric system on its 60,000-square-foot warehouse in Portland, Oregon. One of the largest solar-electric installations in the state, the newly installed system features 540 PV modules (Mitsubishi UD5 series) that will offset about 25% of the building's electricity use.

GRID-TIED INVERTERS PVI3000, PVI4000 PVI5000, PVI5300	Optional Panel Assemblies for 3 - 10.6 KW Output	Includes: KWH Meter AC Disconnect	 SOLECTRIA RENEWABLES
inverters@solren.com www.solren.com PH 978.683.9700 FAX 978.683.9702 CA 562.608.8913			

Grid Alternatives Provides Low-Income Solar Options

Marvas McCladdie always dreamed of buying a home, but with the high cost of housing in Northern California's Bay Area and rising energy prices driving up the cost of living, he never thought it would be possible. He tried saving for the down payment and closing costs with little success: A single father raising two teenage girls, Marvas often worked extra shifts at his job as a cook at the local hospital just to make ends meet.

Just as he was about to give up on the idea, he learned that his application for Habitat for Humanity had been approved. In 2007, after putting more than 500 hours of sweat equity into the construction, Marvas and his daughters moved from a cramped apartment to a three-bedroom house, made possible by a 30-year, no-interest mortgage through Habitat for Humanity.

Marvas's home is one of 26 built on a reclaimed industrial site in the Sobrante Park neighborhood of East Oakland. In keeping with Habitat's emphasis on green building, each home comes

Low-income homeowners spend a higher percentage of their incomes on energy. Consequently, they are the hardest-hit by high energy prices.

equipped with a roof-mounted 2-kilowatt solar-electric system from Grid Alternatives, an Oakland-based nonprofit group providing low-income families with the benefits of solar power.

Founded in 2001 during California's energy crisis, Grid Alternatives is the brainchild of Erica Mackie and Tim Sears—two engineers who previously worked with energy efficiency and renewable energy systems in the private sector. After seeing how rising energy prices practically crippled low-income households, the duo set out to create a program to help low-income communities throughout California access the benefits of solar power.

"Low-income homeowners spend a higher percentage of their incomes on energy. Consequently, they are the hardest-hit by high energy prices. They pay into the tax system that supports rebates and incentives, but most cannot afford the up-front capital investment, and miss out on the benefits of renewable energy," Sears says. "Our goal was to make the economics work for *everyone*."

Courtesy www.gridalternatives.org



Marvas McCladdie and his daughter, Camille.



Courtesy www.habitat.org

Their efforts led to two programs: the Solar Affordable Housing Program, which trains and leads teams of volunteers to install solar-electric systems for low-income homeowners, and the Energy Efficiency Team Program, which installs energy-efficiency upgrades for low-income seniors and disabled persons. The programs' success led to the company's current partnership with Habitat for Humanity.

Since 2004, Grid Alternatives has helped Habitat for Humanity provide more than 165 families with solar-electric systems and, in the process, trained more than 2,000 volunteers in solar-electric installation. Habitat for Humanity coordinates the grants, and funding from participating utilities and rebates through the California Energy Commission cover the cost of the systems. The Grid Alternatives crew takes the lead on system design, procurement, and installation.

In the Sobrante project, each system is designed to reduce a family's electric bills by approximately 75%, resulting in more than \$15,000 in savings over its expected 30-year lifetime. But for Marvas, the benefits go beyond the monthly savings. "My girls ask lots of questions. It's nice to see them genuinely excited to learn more about renewable energy and understand how it all works," he says. "I am sure they will take this with them into the future."

—Kelly Davidson

Another 28 solar-powered Habitat houses are planned for an adjoining site in Marvas's neighborhood. To learn more or lend a helping hand, log on to www.gridalternatives.org.

**NOW OPEN! NEW SALES
WAREHOUSE IN NEW JERSEY!**

World Class Small Wind from **DC Power Systems.**

DC Power Systems searched the world over to bring to you the highest quality small wind turbines available. We also offer guyed and free-standing towers, controllers, off-grid and grid-tied inverters for most models.

Visit our website to learn more about these great products.

Proven
2500W
6000W
15,000W

Kestrel
600W
800W
1000W
3000W

Iskra
5kW

Call us today to become a certified installer!

1-800-967-6917

f: 707 433 5698 | sales@dcpower-systems.com | www.dcpower-systems.com





Courtesy Donald Aitken

PROJECT: Solar Casita by Aitken & Harwood**SYSTEM TYPE:** Residential grid-tied PV with battery backup**INSTALLER:** Jsun Mills, Alta Energiawww.alta-energia.com**DATE COMMISSIONED:** November 2008**LOCATION:** Lake Chapala-Ajijic, Jalisco, Mexico

21.1° N latitude

AVERAGE DAILY SOLAR RESOURCE:

6.0 peak sun-hours

ARRAY CAPACITY: 1.5 kW STC**ESTIMATED ANNUAL PRODUCTION:**

2,190 AC kWh

AVERAGE ANNUAL UTILITY**ELECTRICITY OFFSET:** 75% (energy); 95% electricity costs**MODULES:** 9 SolarWorld, 165 W STC each**INVERTERS:** OutBack PS2 GVFX3648, 3.6 kW rated output**BATTERIES:** 8 Trojan L-16H, 6 V, 420 Ah @ C/20**ARRAY INSTALLATION:** Roof-mounted on concrete roof, oriented true south, tilted at 22°

Under the Mexican Sun—The Solar Casita

Don Aitken and Barbara (Pia) Harwood have both been pioneers in the sustainable building movement in the United States for decades. Aitken is a renowned specialist in international renewable energy policy work. Although currently retired, they tirelessly continue to advance sustainability movements as consultants on both sides of the U.S.-Mexico border—and beyond.

In 2008, the couple purchased a hacienda-style home in an area of Mexico popular with expatriates: Lake Chapala, near the central western coast. They remodeled their home to

Working in Mexico presents its own set of unique challenges, which include frequent power outages, consistently high and low line voltages, severe voltage fluctuations, and a permissible operating range of plus or minus 10%.

include passive solar heating, domestic solar hot water, and a 1.5 kW grid-interactive PV system with battery backup, which allows Don and Pia to offset their carbon footprint, almost eliminate their electric bill, and neutralize the unreliable and unruly nature of the electrical grid in Mexico.

Working in Mexico presents its own set of unique challenges, which include frequent power outages (ranging from hours to days), consistently high and low line voltages, and severe voltage fluctuations (spikes and sags). Additionally, there are no real enforceable electric codes,

standards, or permitting processes in place for residential applications. Lack of conductor color-coding, inadequate wire-gauge sizing related to amperage and voltage drop, multiwire branch circuits, double-lugging, and nonexistent system and equipment grounding are commonplace and enough to make most U.S. installers faint after opening up the service panel.

Overcoming these obstacles relies on an in-depth understanding of cultural differences, planning and design, specification of flexible system components, and, perhaps most importantly, experience, patience, and persistence. Despite all of the interesting challenges, the system was successfully commissioned, and after a four-month adventure with the federal electric company, was the first official net-metered PV contract in a community of 40,000 people.

Don and Pia have led the “solar charge” in the region: as a result of their initiative, many other residents have had PV systems installed. It gives them great pleasure and satisfaction to receive their bimonthly electric bill: \$7. And passing the orange extension cord over the wall to save their neighbors when the power goes out is sweet icing on the solar cake.

—Jsun Mills



www.SMA-America.com

The inverter is the heart of every solar power system.

An inverter transforms the DC power produced by solar panels into utility-compliant AC power, allowing it to be fed into the utility grid. During the transformation process, it is very important that energy loss be minimized. SMA inverters reduce loss and maximize your solar system's performance. SMA is the world's largest manufacturer of solar inverters and builds the most efficient, technologically advanced inverters available. When considering an inverter for your solar power system, SMA is the only logical choice.

Ask for them by name.




The Future of Solar Technology



System Sizing for Residential Grid-Tied PV

Sizing a batteryless PV system for a home requires considering three main factors: budget, array mounting space, and desired annual energy production.

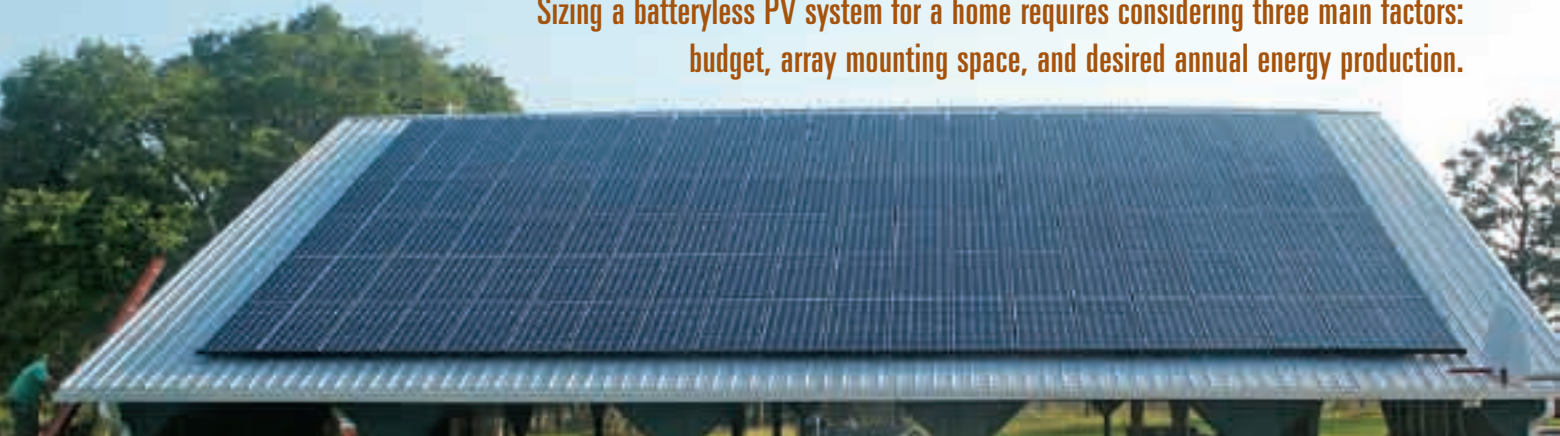

Courtesy www.ecs-solar.com

Budget-Based System Sizing

Currently, batteryless grid-tied PV systems cost \$7 to \$9 per installed watt (before incentives). For the example below, we assume a \$15,000 budget.

$$\text{\$15,000} \div \text{\$7/W} = 2,143 \text{ W}$$

$$\text{\$15,000} \div \text{\$9/W} = 1,667 \text{ W}$$

Given this budget, system size would likely range from 1,700 W to 2,100 W.

Available incentive programs can help offset system costs, allowing you to invest in a bigger array. For example, the federal tax credit for solar-electric systems allows for a 30% tax credit. Factoring this in allows you to increase array size, but also requires additional dollars up-front to pay for the larger system—and enough tax liability to take full advantage of the credit.

Roof Space System Sizing

System size also can be estimated based on “usable” square feet of mounting space. Crystalline PV modules generate about 9 W to 17 W per square foot (averaging 12 W per square foot), while amorphous silicon products generate about 6 W per square foot.

To find “usable” area for PV array mounting, there are several things to consider. (For more information, see “Solar Site Assessment” on page 46.) After accounting for aesthetics and working space around the array, typically only 50% to 80% of sunny roof space can be used. For this example, we will assume a usable area of 300 square feet.

$$300 \text{ sq. ft.} \times 12 \text{ W/sq. ft.} = 3,600 \text{ W (crystalline silicon)}$$

$$300 \text{ sq. ft.} \times 6 \text{ W/sq. ft.} = 1,800 \text{ W (amorphous silicon)}$$

Desired Annual Energy (kWh) System Sizing

System size can be based on annual energy production goals as well. Given your household’s annual electricity consumption, peak sun-hours for the array location, and an average 70% system derate factor (to account for temperature losses, dust/

dirt, wiring losses, inverter efficiency, module production tolerance, etc.), you can calculate the array size needed. For this example, we’ll assume the system will be located in Flagstaff, Arizona, and oriented to true south and tilted at 35° (an angle equal to Flagstaff’s latitude). It will be designed to produce approximately 3,000 kWh per year, which will meet about half of the household’s annual electricity needs.

- Find the average daily peak sun-hours for the site (see Access). For Flagstaff, it’s 6 sun-hours per day.
- Divide the annual PV production goal by the number of days in a year. Divide this total by the number of average daily sun-hours to arrive at your estimated initial array size.

$$3,000 \text{ kWh/year} \div 365 \text{ days/year} = 8.219 \text{ kWh/day}$$

$$8.219 \text{ kWh/day} \div 6 \text{ sun-hours/day} = 1.37 \text{ kW}$$

- To account for system inefficiencies, divide the result by 70% (0.7) to calculate the total system size.

$$1.37 \text{ kW} \div 0.7 \text{ system derate} = 1.96 \text{ kW or } 1,960 \text{ W}$$

Alternatively, the PVWatts online program (see Access) can be used to find annual kWh production values for various PV array sizes. Variables such as non-optimal orientation and tilt angles can be factored in easily.

Efficiency First

Reducing annual energy consumption through the use of energy-efficiency strategies (such as replacing incandescent lights with compact fluorescent lighting) will yield a smaller PV system, lower system cost, and less required space.

Access

Photovoltaics Design & Installation Manual, Appendix B (New Society, 2007) • Solar data, including peak sun-hours

PVWatts • www.nrel.gov/rredc/pvwatts/ • PV production estimator

—Justine Sanchez

“I first used Trojan batteries as an end user and stayed with them when I started my own solar business. I install Trojan batteries because they are durable and easy to maintain.”

~ David Verner, Adirondack Solar



RE SERIES

Now the Best is even BETTER!

With over 80 years of experience, Trojan Battery – the most trusted name in deep cycle technology – took the best performing batteries in the industry and made them even better.

Introducing the **NEW RE Series** – batteries optimized to deliver superior performance and excellent charge efficiency in renewable energy (RE) applications such as solar/photovoltaic, small wind and micro hydro.

- **DuraGrid™** technology provides a 10-year design life and excellent charge efficiency
- **Maxguard® XL** Advanced Design Separator extends life and lowers overall maintenance costs
- **Alpha Plus®** paste formulation promotes longer life and optimum performance
- **Polyon™** – our ultra-rugged case design stands up to the harshest of environments
- **High capacity 2V battery** – our new 2 volt battery minimizes battery connections and lowers installation cost
- **7-year limited warranty**

Trojan batteries are available worldwide through Trojan's Worldwide Master Distributor Network and major Renewable Energy Wholesalers.

For more information contact Trojan Battery Company at 800-423-6569 or visit our website at www.trojanbattery.com/RE.

Receive your **FREE** Technical Brief on Deep Cycle Gel Technology:
visit our website at www.trojanbattery.com/RE007.





Courtesy Gail Geraghty



Courtesy Bud Anderson

CUTTING WOOD WITH THE SUN

For many, there's nothing quite like the feeling of accomplishment in the sweat and labor it takes to cut wood to heat your home. Imagine, then, how good it would feel to eliminate the need for gas and oil to cut wood, as well as much of the sweat and labor?

John Howe has done it by creating a firewood operation where the sole source of energy is the sun. "This is fun," says the retired mechanical engineer as he drives his solar-powered golf cart noiselessly down a tote road near his rural farmhouse. And even more importantly, he says, it's the only way you can cut a tree in the woods without fossil energy—which is beginning to run out.

Parked in the sun, the cart's onboard solar-electric array adds PV energy to its 10 kWh battery pack, which supplies a 2,500 W, 120 V inverter. He easily lifts his 6-pound electric chain saw and connects it to a 150-foot extension cord plugged into the cart. One of his other innovations is an electric 60-year-old Ford 8N tractor. Logs are skidded out by using a 6,000-pound winch attached to the tractor through a standard three-point hitch.

Back at the woodshed, the same golf cart powers the same saw to cut the logs to stove length. Once the logs are cut to length, he swings them over to a waist-high 6-ton splitter and splits them down to firewood size. Nearby, the Ford tractor recharges by being plugged into another tractor: a Farmall Cub with a four-module array.

For Howe, showing how to process firewood without gasoline is as much a demonstration project as are the tractors, the golf cart, and even a solar-powered MG Midget he owns. "In Maine, we are in very serious trouble because we heat with oil," says Howe. "Solar electricity is the way to go. If we don't make use of it, we will absolutely fail as a society."

Gail Geraghty • via e-mail

SOLAR CHORDS

As a child who grew up in the 1970s, I was constantly amazed by the ways my dad would find to join the "green movement" and make our lives more energy efficient. The best part about it was the fact that everything he did was something he did on his own—and many of his nature-powered inventions included materials that were recycled.

Now in his retirement, you'll find my dad traveling to parks and playing his solar-powered, amplified guitar for people of all ages. It's his way of introducing people to the fun (and affordable) reality of solar energy.

Bud Anderson • via e-mail

NET METERING FOR NEBRASKA

This is a call to action for net-metering proponents in Nebraska.


Nebraska has had two bills introduced on the subject of net metering. The first, LB436, is pro-consumer and pro-energy independence. However, it will undoubtedly meet severe opposition from our public power lobby. Nebraska has no private utilities—all electricity is provided by publicly owned utilities.

The second bill, LB663, is much less desirable, but at least addresses the need for net metering in Nebraska. It has many good provisions and, with serious amendment, can be made more pro-consumer than its current pro-utility focus.

The legislature may be finished with both of these bills by the time you read this—the point of this letter is to provide a focus for organizing toward passing a bill like LB436.

You may contact us by phone or email: 402-685-4333 or 402-307-0280; waterdog@nerenew.com.

Robert Byrnes • Oakland, Nebraska
Stonie Cooper • Prague, Nebraska

A photograph of a sunlit forest path. Sunbeams (crepuscular rays) stream through the dense green canopy of tall trees, illuminating the air and the path below. The scene is peaceful and natural, with the sun positioned low in the sky, creating a warm, golden glow.

WE HAVEN'T GIVEN THE SUN A DAY OFF IN OVER 20 YEARS.

At Xantrex, we've worked hard to make our solar inverters work perfectly. That's why we've been innovation leaders for over 20 years. And why our residential, small and large commercial inverters are trusted the world over. You might say the more the sun shines, the better we look.

www.xantrex.com

xantrexTM

PAYBACK? CONSIDER USAGE FIRST

I read with interest “PV vs. SHW” in *HP127*. One factor often overlooked in these sorts of payback analyses is utilization. In the case of a grid-tied 2 kW PV system, utilization is likely to be 100% if annualized net metering applies. On the other hand, solar hot water (SHW) is a use-it-or-lose-it proposition, so utilization is likely to be substantially less than 100%.

During warm weather, much of the capacity of a SHW system is wasted unless the system is undersized relative to the annual load. Unfortunately, most systems end up being oversized, pushing payback well beyond the life of the system. This happens because hot water use is routinely overestimated, especially for conservation-minded households without children. Moreover, there seems to be a mind-set that more is better. *Energy Design Update* reviewed an interesting zero-energy case study in its March 2008 issue that demonstrates this point. *EDU* estimated a simple payback of 489 years for the SHW system! (See www.nrel.gov/docs/fy08osti/42339.pdf.)

David Butler,
Environmental Building Solutions •
Sierra Vista, Arizona

RENEWABLE INSPIRATION

Last October, a friend invited me on a two-hour drive from Philadelphia to the gentle rolling hills of southern Lancaster County, Pennsylvania. The house of an acquaintance, Jay McGinnis, was part of the National Solar Tour, organized locally by the Susquehanna Sustainable Business Network (SBN). Jay owns a 500-acre working farm that’s been in his family for several generations.

We parked by a tidy, two-story farmhouse flanked by an old hay barn and some outbuildings, and were greeted by a cheery SBN volunteer in the garage that serves as the workshop for Jay’s Woolen Mill Fan Company, which produces interesting belt- and pulley-

driven ceiling fans. Looking past the workbenches, I noticed the workshop had hot and cold lines for radiant heat sunk into the concrete floor. Also, next to the utility meter, I saw a box labeled “Grid Tie Solar Inverter” manufactured by Xantrex. The tour had begun.

Outside, Jay showed how the back of the workshop’s peaked roof was half covered with photovoltaic modules. Since it was installed in March 2005, the 3 kW array has produced 13,543 kWh. His solar-electric system feeds electricity back into the utility grid through the inverter, running his electric meter backward on a sunny day. Using the grid as his “battery” earns him a nice check from his local utility, which buys the kilowatt-hours he generates at the retail rate. As a bonus, Jay also gets to sell his clean energy production “credits” separately, netting a few thousand dollars every year.

The tour proceeded to a two-story clapboard shed a hundred paces away, where the 50-foot-tall steel frame of an old-time Aermotor windmill sprouted from its roof. Enclosing the base of the windmill’s steel frame with a post-and-beam shed provides Jay with a workspace for using the wind power with any device he might need. Inside, the mechanical drivetrain spun fitfully with the mild breeze, turning a leather belt that led ultimately to a 5-gallon “hand-cranked” ice cream maker. Jay explained how he uses the Aermotor windmill to compress air into several large, repurposed propane storage tanks to drive the air tools in his workshop. Although a more modern-looking Skystream wind generator was next to his tractor garage, it had not generated the electrical output Jay hoped for, due to lower-than-anticipated winds in the area.

On the roof of the tractor garage, we saw more Sharp PV modules (3.3 kW, and newer than those on his workshop). These had generated 4,490 kWh since November 2007. On the other side of that garage, Jay had recently drilled three bore holes to a

depth of 300 feet for the closed-loop geothermal system he planned to install later in the season. Jay also pointed out the long, clear cylinders of a Sunda solar hot water system on the roof of his home’s breezeway—48 vacuum tubes for household hot water. After that, we got to tour the house and a dazzling showroom of all the belt- and pulley-driven ceiling fans Jay manufactures. What a treat! Check them out at www.architecturalfans.com.

The story I took home is how over the last five years, Jay declined his financial adviser’s advice, cutting his IRA contributions in favor of renewable energy options for the home and business. I didn’t calculate his outlay and return numbers to determine a payback point. But I find his example of exploiting a full spectrum of solutions inspiring, and will seek to take a similar tack in my urban homesteader context.

Tim Siftar •
West Philadelphia, Pennsylvania

ERRATA

The Web site address listed in the “Charge Controller Buyer’s Guide” (*HP129*) for Apollo Solar should be www.apollosolar.com.

METER MAIL

After reading about monitoring 240 VAC loads in *From Us to You* (*HP129*), many readers asked where they could get meters. Author (and metering maniac) Ian Woofenden recommends reconditioned meters from www.hialeahmeter.com.

TO CONTRIBUTE

write to:

mailbox@homepower.com

or Mailbox, c/o Home Power
PO Box 520, Ashland, OR 97520

Published letters are edited for content and length. Due to mail volume, we regret that unpublished letters may not receive a reply.

And the drumroll please...



You asked. Magnum listened. Introducing the NEW Magnum Panels and Parallel Inverter/Chargers

MP Series AC/DC Panel features:

- Single panel can power up to two units
- Dual panel can power up to four units
- Only five part numbers – multiple configurations
- Standard components include:
 - AC bypass (60 or 125 amps)
 - DC breaker (250 amps)
 - AC and DC wiring inside the panels
 - DC shunt (500 or 1000 amps)
 - AC input breakers

MS-PAE Series Parallel Inverter/ Charger features:

- 120/240 VAC output
- Two new models offered, the MS4024PAE and MS4448PAE
- Parallel up to four units with the new Magnum Router
- Achieve up to 17.6 KW at 120/240 VAC

To learn more about
these new products visit
www.magnumenergy.com

MAGNUM
E N E R G Y

The Powerful Difference


Ask the EXPERTS!

Wind-to-Heat Viability

About 80% of the cost of home energy use in my home state of Alaska is for heating; the remainder is for electricity. For folks who don't have access to natural gas or cheap wood, heating with fuel oil or propane may be the only option.

However, it seems like directly dumping 48 VDC power from a wind turbine into a resistance heater submerged in a large water-storage tank would allow a homeowner to heat water at a reasonable cost. With this setup, there's no need for an inverter or sophisticated controls—the resistance element could take whatever the wind can deliver and a backup element could be installed in case the primary element fails. Are there any pitfalls to implementing this type of system?

Andy Baker • Anchorage, Alaska

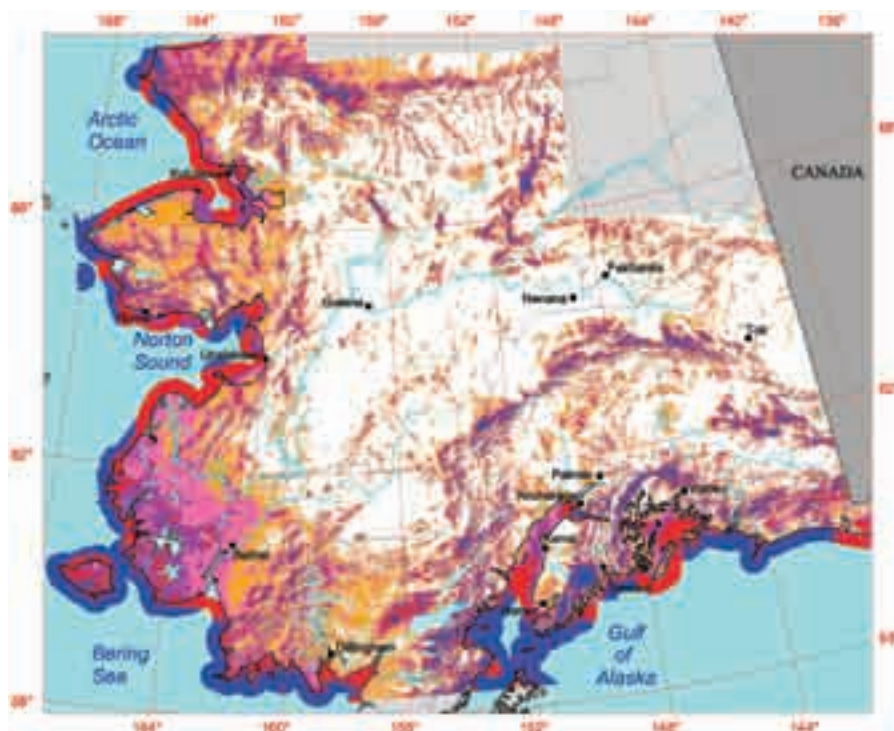

Alaska Mainland Winds at 50 Meters

Wind Power Class	Resource Potential	Wind Power Density (W/m ²)	Wind Speed (m/s)	Wind Speed (mph)
1	Poor	0 – 200	0.0 – 5.3	0.0 – 11.9
2	Marginal	200 – 300	5.3 – 6.1	11.9 – 13.7
3	Fair	300 – 400	6.1 – 6.7	13.7 – 15.0
4	Good	400 – 500	6.7 – 7.3	15.0 – 16.4
5	Excellent	500 – 600	7.3 – 7.7	16.4 – 17.2
6	Outstanding	600 – 800	7.7 – 8.5	17.2 – 19.0
7	Superb	> 800	> 8.5	> 19.0

At first glance, this direct wind-to-heat approach makes sense. Wind is a good match with heating—it's often windy when it's cold, and small wind turbines can indeed be a useful source of heat. I do use my turbine for heating, but only as a by-product of electricity production.

Making *only* heat with wind power is the questionable part for most homes. Wind is variable—and although wind turbines can often produce a surplus, when the wind's not blowing, you'll suffer shortages. Plus, when you don't need more heated water, wouldn't you want to use the wind energy to offset your electrical usage? On the other hand, perhaps you'll be able to heat a home with wind energy for half of the time, but you will still need a backup heat source. Either way, integrating your wind turbine and heating system with the utility grid makes a lot of sense.

As far as cost, a heat-only system is cheaper to set up, but it sometimes doesn't pay off, because heat and thermal energy are relatively inexpensive compared to a "high-grade" energy source like electricity. Your heating fuel costs will need to be high and your wind resource excellent to make a wind-to-heat system pencil out. In most cases, money spent on improving insulation levels in your home will have a better return.

That does not mean that nobody should do it (including just for fun), but I would not promote this method as a way to save money in most situations. Using the wind energy for other electrical loads as well makes more sense, since you will be able to use *all* the wind energy, not just what you need for heat. A grid-tied system that offsets your utility bills allows you to treat the grid as a big battery and store your surplus—the best of both worlds.

Hugh Piggott • Scoraig Wind Electric

“Your heating fuel costs will need to be high and your wind resource excellent to make a wind-to-heat system pencil out.”

Solar Electricity is Coming Down to Earth

Now is the time to go solar. Prices are better than ever. The new 30% Federal Tax Credit, state rebates and other incentives reduce the cost of your system by up to 50%. New financing options are available. Going solar has never been more affordable or easier. Contact SunWize for a site evaluation.

Visit our website www.sunwize.com or call us at 866-436-7353.



SunWize

Reliable People ::: Reliable Products ::: Reliable Power!

Grid-Tied Inverter Safety

What happens when the utility grid fails? Does a grid-tied solar-electric system need an automatic transfer switch to stop sending electricity to the grid? What are the differences between a PV system with and without battery backup when the grid goes down? I don't want to have an electrocuted worker on my conscience.

Jorge A. Dávila • via e-mail

For the safety of line workers, inverters must stop sending electricity to the grid when there is a grid failure. As you can imagine, this is a serious concern for utilities because they do not want any utility lines to be energized while they are trying to fix the cause of the power outage.

The condition where an inverter continues to electrify the grid during an outage is called islanding. To prevent this situation, Underwriters Laboratories' Standard 1741 lays out the electrical requirements for grid-tied inverters, including anti-islanding. To receive UL listing, an inverter must be certified to be nonislanding, meaning it will not send electricity to the grid during a grid failure. By installing a UL-listed grid-tied inverter, you can rest assured that your system will not pose a threat to your local linemen and will shut down or disconnect from the grid when it fails.

There are several ways inverters accomplish this. The first and easiest is that an inverter monitors the voltage and frequency of the grid. If either one falls outside set parameters, the inverter will shut down. This method works the vast majority of the time. The trouble comes if the loads attached to the inverter happen to match the inverter's output power at that time and it detected no noticeable change in frequency or voltage when the grid failed. In this case, a more sophisticated detection scheme is necessary. To account for this possibility, inverters employ a variety of methods to effectively push and pull slightly on the grid voltage and frequency. When the grid is present, this little push-and-pull has no effect. However, if the inverter is the only source supporting an islanding grid, it will quickly push the voltage and frequency outside the inverter's acceptable window of operation, triggering the inverter to shut down.



Paul Fawcett/iStockPhoto

The differentiation between battery-based and batteryless inverters is an important one. In either case, the inverter shuts down its connection to the utility when it detects a grid failure. Batteryless inverters remain off until the grid is back up and running again. And, immediately after turning off its output transistors, battery-based inverters will also use a transfer switch to disconnect from the grid. Once disconnected, however, battery-based inverters will reactivate the output transistors to continue supplying electricity to loads wired into the critical load subpanel. This switching takes place in less than 16 milliseconds, which is fast enough not to disrupt computers and the like that are backed up by the system. The key to installing a battery-based grid-tied system is to make sure that all loads that require power when the grid is down are wired into a separate critical load subpanel and to isolate that subpanel from the grid (i.e., it should be powered only via the output of the inverter). This way, when the grid goes down and the inverter is sending power only to the critical load subpanel, PV power is prevented from energizing the utility lines.

Dana Brandt • Ecotech Energy Systems

“The condition where an inverter continues to electrify the grid during an outage is called islanding.”

What Makes AEE Solar a Great Team to Work With?

REASON #3

Unsurpassed Tech Support

WITH THREE DECADES of hands-on, front-line experience in the solar business to rely on, the sales engineers and tech support staff at AEE Solar are known industry-wide for the depth and quality of their technical expertise.

Whether you need advice on designing an off-grid or grid-tie system, the latest product specs for string-sizing, help in choosing the right grounding method to ensure NEC compliance – or any other support you might need to do the job right – we're here to help.

Call tech support anytime during business hours, 8:30 to 5:00 Pacific Time, or leave a message after hours and we'll get back to you the next business day if at all possible.

**Our success depends
on your success.**

Whether you are an industry veteran or a solar rookie, put AEE Solar on your team for solar success! Call or apply online today!



Become an authorized dealer and get all AEE Solar has to offer:

1. Best Products
2. Widest Inventory
3. Unsurpassed Tech Support
4. Dealer Training
5. Renowned Catalog
6. On-Time Shipping



The Only Wholesale Distributor You'll Ever Need

www.aeesolar.com



800-777-6609

8:30 to 5:00 Pacific Time
Monday-Friday

707-923-2277

707-923-3009 fax

sales@aesolar.com

1155 Redway Drive

PO Box 339

Redway, CA 95560


Solar Still

I'd like to distill my spa water to purify it, eliminating the need for nasty chemicals. I have noticed the similarities between a solar still and a solar box oven. Are they interchangeable? What is the best tilt of the still's glass for optimal under-glass distilled water collection?

Steven Coles • Phoenix, Arizona

While a solar still and a solar box cooker may look similar, for optimum performance their construction is quite different. The most common solar still is the single-basin type, which consists of an airtight basin that holds the water to be distilled. This basin is covered by a sheet of glass that is tilted. The cover allows solar radiation to enter the still, where it heats and evaporates the water, leaving contaminants in the basin. The water then condenses on the underside of the glass and runs down the glass to a collection trough. Water exits the trough through a tube directed into a container.

In a still, the thinner the glass, the better. Thin glass will stay cooler on the inner surface, which helps the water condense faster. In a solar still, the slope of the glass should be between 8° and 12°. Setting the glass at a greater slope increases the volume of air inside the still, reducing the system's efficiency. A lower slope makes it more difficult for the condensed water to run down the glass, and water droplets may just fall back into the basin. Also, the closer the glass is to the water, and the less air space in the still, the more efficient the

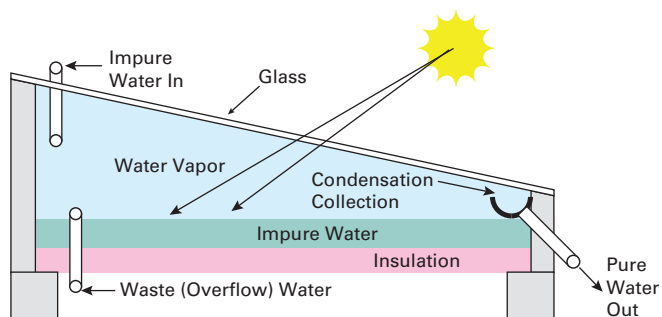

still will be. According to solar still pioneer Horace McCracken, who designed and built solar stills for more than 30 years, a glass cover that is no more than 2 to 3 inches from the water surface will allow the still to operate efficiently.

There are commercial solar stills on the market and plans are available to build your own. However, the small amount of water produced in a solar still will make your application very difficult. A 30- by 48-inch commercial solar still like the SolAqua Rainmaker (www.solaqua.com) can produce up to 1.5 gallons per day. Spas contain several hundred gallons of water, and cycling that much water through solar stills every few days would take a massive array.

Laurie Stone • Solar Energy International

INCREASE your PV Energy Harvest...

- Maximum PV input of 400W
- Enables use of high voltage modules up to 75Voc
- Converts up to 36 volt PV to 24V or 12V battery
- Provides power boost and maximizes PV output
- Smaller and less expensive than other MPPT controllers

SUNSAVER MPPT™
Solar Controller with Maximum Power Point Tracking



15 Amps at
12/24 Volts DC

MORNINGSTAR
corporation

Phone: +1-215-321-4457 Fax: +1-215-321-4458
info@morningstarcorp.com www.morningstarcorp.com

Battery & Generator Housing

I am planning to build a battery shed and want to know if the same shed can be used to house a backup engine generator. What are the exhaust and other safety considerations?

Berry Roper • via e-mail

The *ideal* power shed has three rooms: One for the batteries (assuming they are vented batteries), one for the inverters and other electronics, and one for the generator. Flooded (and therefore vented) batteries must be isolated from any spark source and adequate ventilation provided to exhaust the explosive and corrosive gases generated during charging. Inverter(s) and associated electronics contain spark-generating switches and relays, so they should not share an enclosed space with the batteries. Some power rooms have a sealed and vented battery box within the electronics space. Generators also pose a spark hazard, and should not share the same space as batteries. They also create too much heat to share a room with the electronics, and should be isolated from the inverters.



Courtesy Miller Solar

Consider these tips when you're designing your power shed:

- **Inverter equipment layout.** The side of the inverters with the DC connections should be nearest the batteries and receive conduit from the DC charging sources. The side with the AC connections should be nearest the generator and conduit to loads. Electronics need plenty of room in front for safety during service (the *National Electrical Code* requires a minimum of 3 feet of clearance). Follow the manufacturers' recommendations for clearances on either side of the equipment.
- **Battery room.** No light switches are allowed in the room—locate them outside the shed within a weatherproof cover or in the inverter room. Use sealed, "explosion proof" light fixtures. Allow plenty of room to service the batteries. Seal conduit between the battery and inverter rooms. Secure batteries so they can't overturn in an earthquake.
- **Generator housing.** The generator's electrical connections also require 3 feet of clearance in front for service. The manufacturer may provide additional recommendations for clearance for service and ventilation. The manufacturer will also provide exhaust and intake requirements. Port the generator exhaust to the outside with flexible exhaust pipe.
- **Size.** You probably won't regret making your power shed too big, but you'll always regret it if you make it too small.
- **Grounding.** Specify a Ufer ground (in which the concrete acts as the ground rod) in the foundation of the building. The Ufer ground should be in the electronics room.

William Miller • Miller Solar



Wash away solar panel power loss.

The Heliotex™ System

(Pat. Pending) automatically cleans your solar panels.

- Power loss of up to 25% or more is eliminated
- A deionized water filter eliminates hard water spotting
- Avoid expensive manual cleaning, potential liability, personal injury or damage to roof and panels
- Biodegradable soap does not injure solar panels, plants or animals
- Automatically program washing and rinsing cycles

HELIOTEX®
AUTOMATIC SOLAR PANEL CLEANING SYSTEMS

Protect your solar panels from theft. Keep your solar panels safe with **Heliolox™ Locking Fasteners**. Secure and lock solar panels in one step with the patented Heliolox Solar Panel Locking fasteners. With key availability restricted, they are close to tamper proof, impossible to duplicate, and are designed to withstand pressure, expansion and contraction.



TO LEARN MORE: WWW.HELIOTEX.COM PHONE: 800-280-6976 OR 760-837-0390

Net-Zero Energy Manufactured Home?

My boyfriend thinks that it's possible to retrofit a manufactured home and turn it into a net zero-energy home. Because manufactured homes are typically less expensive than custom-built homes, he believes that we could take the money we saved from buying a manufactured unit and use these savings to make the efficiency upgrades. I feel that manufactured homes are not built well enough to achieve this high level of energy efficiency. Even it were possible to make it a zero-energy home, it seems that the resale value would be less than a site-built or modular home. What's your take?

Kristin Holleran • Vancouver, Washington

By choosing a manufactured home over a site-built one, you will likely save on a square-foot to square-foot basis, but the savings won't be enough to make net zero-energy retrofits cost effective. Any net zero-energy strategy is likely to involve a significant investment in renewables. Depending on your heating, cooling, and electricity use, the expense of the systems to cover 100% of your energy use may approach the cost of the house. However, there are some cost-effective products and design strategies to consider.

In the Northwest, homes built under the Northwest Energy Efficient Manufactured Housing (NEEM) program typically offer more savings through efficiency than a conventional manufactured home, offering lower utility bills that make up for the home's

comparatively higher price. Incentives for NEEM homes are available from many regional utilities; Oregon and Montana also offer tax credits for NEEM homes. In addition, NEEM homes have a higher resale value than other HUD code homes, as reflected in industry-recognized appraisal tools.

If you decide to purchase a NEEM home and the retailer won't offer high-efficiency lighting and appliances, order the home without lighting fixtures or appliances, and purchase Energy Star fixtures and appliances yourself.

Maximize solar heating by selecting appropriate floor plans and orienting the longest side of the home to face south. Install heavy drapes and blinds, and consider exterior awnings for shading.

Heating Costs for NEEM vs. HUD Homes

City	Avg. Heating (kWh/Yr.)		Annual Savings	
	NEEM	HUD	Electric	Gas
Portland, OR	5,900	11,295	\$404	\$320
Boise, ID	7,725	14,375	499	396
Spokane, WA	10,005	18,335	625	490
Missoula, MT	11,845	21,610	733	584

ABS Alaska
888 606 4949
www.absak.com

Trotac Marine
250 386 2341
www.trotacmarine.com

Waldron Power and Light
888 927 2526
www.wapalco.com

Backwoods Solar
208 263 4290
www.backwoodssolar.com

No Outage
877 211 7255
www.nooutage.com

Triton Marine Services
252 728 9958
www.triton-marine.net

Marine Warehouse
305 635 0776
www.marinewarehouse.net

Ampair® 600

600w at 11m/s (24.6mph)
1000w at 14m/s (31.1mph)

Marine grade 1.7m (5'8") diameter
wind turbine with blade pitch control

Regulator includes dump loads, charge
control, switchgear, metering and fuses

Battery charge at 24V or 48V
Grid connect at 230V

Ampair 600




Ampair 300




Ampair 100



Aquair® 100



UW 100



Regulators



ampair®
www.ampair.com

Greg Nicholas/StockPhoto



Make sure the retailer uses state-certified and state-trained installers. Proper home setup focuses on correct installation of the heating system's crossover duct and the building's marriage line at the walls, floor, and ceiling. If you have concerns, hire an energy professional to conduct a blower door and duct-blaster test to check the home and ducts for air leakage.

Make sure your home is "solar ready," with roof designs that allow easy installation of solar hot water collectors or PV modules. Pipe and conduit can also be run to the roof for connecting the collectors or modules to the home's hot water or electrical system.

Check out the Building America Industrialized Housing Project (www.baihp.org), which is investigating cutting-edge technologies and design strategies for manufactured homes, including rigid and spray-foam insulated wall systems, highly efficient window technologies, high-efficiency ductless heat pumps, and solar-ready design.

If you do consider modular or traditional construction (site-built) homes, check out the Northwest Energy Star program (www.northwestenergystar.com), with energy standards designed to exceed state codes by 15%.

In general, if you're considering a manufactured home, before trying to reach the apple all the way at the top of the tree (net-zero), we suggest starting with the low-hanging fruit—a NEEM home and Energy Star technologies.

Mike Lubliner & Andy Gordon •
Energy Specialists, WSU Energy Program

To submit a question to
Home Power's Ask the Experts,
write to: asktheexperts@homepower.com

or, Ask the Experts
Home Power, PO Box 520, Ashland, OR 97520

Published questions will be edited for content and length. Due to mail volume, we regret that unpublished questions may not receive a reply.

BACKWOODS SOLAR ELECTRIC SYSTEMS

BACKWOODS Solar Electric Systems

For an earth restored and a world at peace.

Solar • Wind • Hydro

Specializing in Independent Electric Power for the Remote Home where utility power is not available. For 30 years, your questions have been personally answered by the good folks at Backwoods Solar that use these products everyday. Each Backwoods Solar employee owns and operates an off-grid home powered by the solar, wind, and/or micro-hydro systems offered in our catalog. We know what works and how it works! Our catalog/planning guide teaches the basics of installing solar, wind and hydro electric residential power and we offer free system design service either by telephone, email, or your visit to Backwoods.

185 PAGE
CATALOG / PLANNING GUIDE
Free to Home Power readers
in the U.S.A.

Visit us or write:
Backwoods Solar Electric Systems,
1589-HP Rapid Lightning Creek Rd,
Sandpoint, Idaho 83864 USA

Phone: (208) 263-4290 • Fax only (208) 265-4788
Website: www.backwoodssolar.com
Email: info@backwoodssolar.com

A New Breed of Inverter

Through tireless direct interaction with installers across the country, KACO has realized the most pressing needs of PV professionals and has transformed those wishes into the **02xi blueplanet** series. Our new inverter design is the perfect combination of form and function that today's solar installer is looking for. KACO has also subjected the 02xi series to a bundle of field tests to ensure the most successful release of a new inverter in the industry.



- Best quality-control measures world wide
- Most reliable product available

- Carbon neutral manufacturing process
- Superior customer support



(866) 522-6765 • www.kacosolar.com

Visit us online and discover why you should be using KACO inverters with your projects today.



QUALITY BY DESIGN



Reliable solar hot water performance, sunup to sundown.

Day-in & day-out dependability — Heliodyne systems installed in the late 1970's are still running smoothly, providing greater energy output (dollar for dollar) than any other renewable energy form. Our featured GOBI® solar collectors are made in the USA, and come factory-tested to 300 psi, with standard American fittings for hassle-free job-site installation. And with our proven designs and dedicated service & support, we're a dependable leader you can trust. Call us to learn more today.




Visit us at www.heliodyne.com, or call **1.888.878.8750** for information about us, and our products.

Heliodyne, Inc. • 4910 Seaport Avenue • Richmond, CA 94804
T: 510.237.9614 • T: 1.888.878.8750 • F: 510.237.7018
Information & Support: info@heliodyne.com
Sales Inquiries: sales@heliodyne.com
www.heliodyne.com

**EXCELLENCE
BY DESIGN™**

Residential Building-Integrated Photovoltaic Systems

by Paul Mync

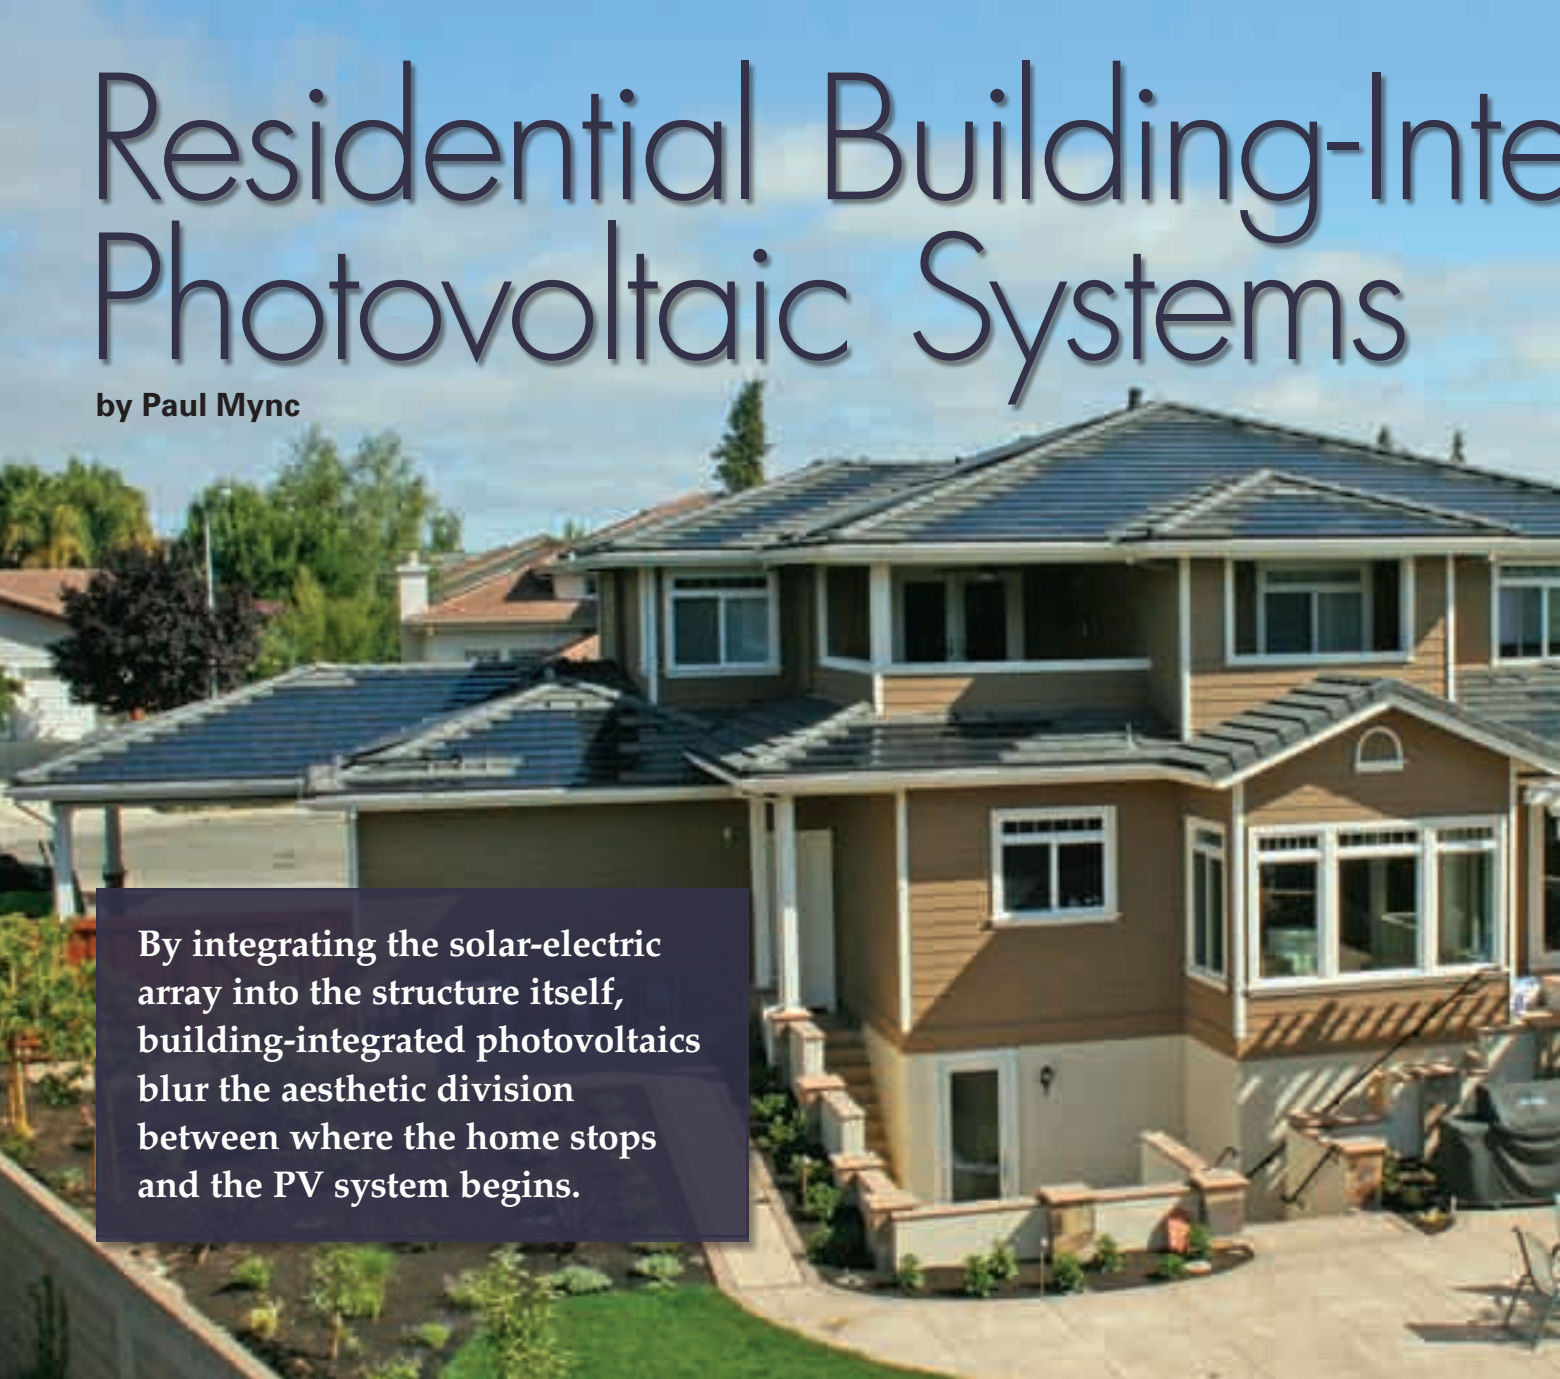A photograph of a modern two-story house with a brown and tan exterior. The roof is covered with dark, rectangular solar panels that are seamlessly integrated into the building's structure. The house has large windows and a covered front porch. The background shows other houses and trees under a clear blue sky.

By integrating the solar-electric array into the structure itself, building-integrated photovoltaics blur the aesthetic division between where the home stops and the PV system begins.

Until recently, most residential solar-electric arrays consisted of rigid modules attached to a roof-mounted rack. There's no mistaking this type of system—most of them are quite visible and easily identifiable. But while some folks view a standout system as a chance to educate and enlighten, others don't like the looks or just want the system to inconspicuously blend in, generating clean energy without standing out. If you fall into this latter group, a building integrated photovoltaic (BIPV) system might just be what you've been looking for. For roof retrofits, expect to pay a little more, but if it's for new construction, the costs of BIPV can be very similar to a typical framed PV array.

BIPV Applications

The most common home-scale BIPV application is in new home construction. Due to the ever-growing demand for

energy-efficient, "green" homes, many homebuilders have begun to offer some sort of BIPV product as an option or as part of a planned green-housing development.

Another opportunity to incorporate BIPV into an existing home comes during reroofing, when the roof's structure is exposed. The PV mounting hardware is installed first, and the roofing is placed around it, resulting in more trustworthy weatherproofing.

Solar roofing PV modules integrate seamlessly with the roofing material. They are attractive, not only because the modules blend in aesthetically but also because they serve a second purpose as the roofing material.

Atlantis Energy Systems, BP Solar, GE Energy, Sharp, SunPower, Suntech, and Uni-Solar all offer ready-to-install roofing tiles. Some of these products are not directly available to end users or installers, and several




Courtesy www.appliedsolar.com

products are only available to roofing companies and new home builders/developers. Lumeta also has BIPV roofing products that are currently undergoing the Underwriters Laboratories' certification process and are to be released later this year.

For Installers & End Users

Atlantis Energy Systems' Sunslate is a PV shingle made of six single-crystalline cells on a fiber-cement backing. Sunslates can be incorporated into a concrete tile, composition, wood shake, metal, or slate roof. These modules are mounted using a traditional roofing

Courtesy www.atlantisenergy.org (2)

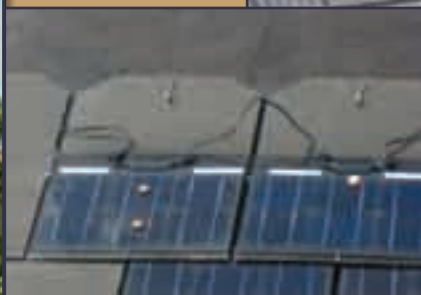

Atlantis Energy Systems' Sunslates blend with the surrounding shingles almost seamlessly.

Courtesy www.uni-solar.com
& Actus Land Lease



Uni-Solar laminates use an adhesive backing to stick to standing-seam metal roofing.



Suntech PV roof tiles come in colors to match the surrounding roof surface.

Courtesy www.suntech-power.com (2)





Sharp's roof-integrated module is designed to replace five standard, flat cement tiles.

Courtesy www.bpsolar.com [2]



BP Solar's Energy Tiles are made with multicrystalline PV cells to maximize efficiency.

method, with an underlayment of standard 30# felt tar paper. The roof deck is prepared with vertical 2 by 2s fastened through the deck and into the rafters. One-by-fours are nailed horizontally to the 2 by 2s to create a raised batten framework. The Sunslates hang on supplied hooks nailed to the 1 by 4s. The spacing behind the slates allows airflow to help reduce PV cell temperature and associated power loss.

GE Energy's PV Roof Integrated Modules can be used with flat concrete-tile roofs.



Courtesy www.gepower.com/solar [2]



Sunslates are typically connected in series strings of 24 slates, using a proprietary connector system (designed to hold a bypass diode for each tile). Failure of a single slate presents a challenge for replacement, for a section of the slates will need to be removed to gain access to the failed slate. Installations typically require multiple strings, with all strings grouped together and entering into a single penetration into the attic. This product comes with a limited 20-year power warranty.

GE Energy's PV Roof Integrated Modules are designed to integrate with flat concrete-tile roofs. Each module contains 18 multicrystalline cells and one bypass diode. Modules are wired together with Solarlok connectors. To install, brackets are screwed down to unraised battens. Modules are secured to the roof with clips into the brackets. This product comes with a 20-year limited power warranty.

Sharp manufactures a roof-integrated module that is designed to replace five standard, flat cement tiles. The modules are comprised of 18 multicrystalline cells with one bypass diode per module and are wired together with Onamba C3 quick connects. These modules are secured to standard unraised battens with gasketed screws. The limited power warranty is 25 years.

Uni-Solar manufactures a thin-film laminate for standing-seam metal roofs. An adhesive seals the modules to the metal, avoiding roof penetrations. Laminates are wired together via MC connectors, with the connections routed through the roof's ridge cap. Bypass diodes are wired across every cell in Uni-Solar products, which makes the modules more shade-tolerant than PV products that protect multiple cells with a single bypass diode.

Manufactured with triple-junction thin-film amorphous silicon, these modules offer better low-light and high-temperature performance. The primary disadvantage is the lower efficiency of amorphous thin-film products (see "Efficiency vs. Roofing Space" sidebar). This product comes with a limited 20-year power warranty.

(continued on page 42)

Blurring the Edge of BIPV: Solar Awnings

Integrating typical framed PV modules into solar awning structures is becoming an increasingly popular method to combine both form and function. When properly sited, solar awnings can reduce a home's cooling load and supply energy at the same time. Compared to standard roof mounts, awnings allow for maximum airflow along the backside of the modules, reducing cell temperature and decreasing the efficiency hit that high ambient temperatures can take on PV performance.

Standard solar modules with opaque backsheets can be used with a racking structure to create awnings, but using glass-backed modules allows some light to pass through, which can be desirable for functional and aesthetic reasons. Sanyo's HIT Double series are "bifacial" modules, which generate electricity from both sides. Used with a reflective ground surface, they can increase energy production, Sanyo estimates, by 15% to 20% compared to standard modules. Actual energy increase from bifacial modules depends on site specifics, such as the amount of incident light reflected from the ground.

Bifacial awnings typically require a customized mounting frame to create a watertight structure, support the modules while not obscuring light transmission, and hide module wiring for better aesthetics. Several companies cater to the bifacial awning market niche, providing custom and prefabricated awning systems.

Awning structures are now one of the more common ways to integrate PV into a home. But in the commercial PV sector,

From the top, the array blends into the structure's architecture.



www.homepower.com



With hardware and wires hidden, the underside of a well-designed solar awning is aesthetically pleasing.

many companies are offering custom BIPV glass products to architects and engineers working on high-profile projects. For example, Applied Solar provided custom-built, glass PV modules for a 172 kW canopy at the California Academy of Sciences in San Francisco's Golden Gate Park. Over time, it's likely that these commercial solutions and products will also make their way into residential BIPV installations.

—Justine Sanchez

Underneath, filtered light comes through.



Courtesy www.floriansolarproducts.com (3)



Lumeta's Solar S and Solar Flat products visually integrate with S-type or flat concrete tiles.



Available to New Home Builders & Roofing Companies

BP Solar's Energy Tile is a solar roofing product designed to integrate with flat concrete roof tiles. With 18 multicrystalline cells, each tile uses one bypass diode. Tiles are wired together via MC connectors and secured to the roof via standard, unraised battens. The limited power warranty is 25 years.

SunPower's SunTile is another product for S- or flat concrete tile roofs. SunTiles have 22 monocrystalline cells per tile, with all of the cells' electrical contacts on the back. Without gridlines on the cell fronts, more sun gets through, which means higher efficiency (the manufacturer claims up to 22%). The tiles each have one bypass diode and include MC connectors. SunPower does not require a raised batten system, as the SunTile design allows for continuous airflow beneath the array. Mounting clips are integrated, and the tiles attach to the roof with gasketed screws. The power warranty is 25 years. SunTiles are only available for new housing developments of 25 or more homes.

Efficiency vs. Roofing Space

Because they can be deposited on flexible surfaces and can offer better high-temperature performance, thin-film PV cells are used in some BIPV roofing products. However, this type of PV technology is about 50% less efficient per square foot than a traditional single- or multicrystalline PV technology. This lower efficiency results in about twice as much surface area needed to produce an equivalent amount of power. If your roof space is limited, consider products made from single- or multicrystalline PV cells.

Suntech's SolarSave roofing tiles are sized to integrate with flat concrete tile or S-tile roofs. With 14 multicrystalline PV cells, each tile has one bypass diode. Tiles are wired together with MC connectors. Suntech recommends installing tiles on raised battens to increase airflow and reduce power loss from high temperatures. The tiles are secured to the batten structure either with nails or deck screws, and can be installed with wind clips to increase wind-load ratings. The limited power warranty is 25 years.

Coming Down The Pike

Lumeta's Solar S and Solar Flat tiles are for profiled and flat concrete or clay tile roofs. Each tile has 12 monocrystalline cells, with one bypass diode per tile. Tiles are wired together using locking connectors. Each solar S- or flat-tile is designed to replace three standard cement or clay tiles. Depending on the roof pitch, battens may be required. The tiles are attached to the roof with stainless steel screws. This product comes with a 25-year power warranty.

BIPV Characteristics & Considerations

Designing BIPV into a home creates significantly different challenges than installing a standard PV system, since the successful integration of the system often relies on the home's design. If the home is using solar tiles or shingles, roofing design and collaboration with the roofing contractor become essential, since the tiles are installed along with the roofing and can affect the roof structure. Solar tiles usually require a manufacturer-designated mounting method. The roofer can help with mounting the BIPV, sealing roof penetrations, and dealing with any roofing issues that may arise.

The electrical characteristics of BIPV products also differ from standard PV modules. A BIPV roof tile is usually smaller than a PV module, containing fewer cells. That means lower output voltage, requiring many more BIPV roof tiles connected in series to attain the input voltage of a modern residential grid-tied inverter. It's common to have more than 30 solar tiles in series to reach the operating voltage of the inverter. Requirements for series fusing or combiner boxes may not apply with only one or two strings.

Troubleshooting BIPV systems also can be difficult. When BIPV systems are fully integrated into the building, gaining access to the modules and connections can become an issue, unlike a conventional rooftop-mounted PV array. For example, troubleshooting an individual solar tile may involve removing others to gain access to the malfunctioning one. Plus, just figuring out which tile has failed can be a daunting task: You will first need to isolate each individual string, then each solar tile will need to be tested until the malfunctioning one is found.

More Expensive? Maybe, Maybe Not

Retrofitting an existing home with BIPV products can be more expensive than buying traditional PV modules and racking. However, comparing costs between these two types

of installations and even between new home construction projects can be tricky. First, BIPV products generally blend two functions (roofing and electricity generation) into one product, which can help offset their higher cost. Second, BIPV roofing tiles are usually sold to large-scale homebuilders, who are given pricing based on the size of the projects. Complicating the issue further is that many BIPV roof-tile companies do not sell direct to the end user. For new home developments, grid-tied BIPV systems cost about the same as standard, non-BIPV ones: about \$7 to \$8 per rated watt.

Another consideration is that incentive programs aimed at new homes may boost the BIPV market, eventually lowering costs. For example, the California Energy Commission's New Solar Homes Partnership gives state rebates and tax credits for PV systems included with new homes. New homes and newly constructed affordable housing projects have their own incentives set aside, highlighting California's goal of spurring PV design from a project's inception.

In general, the BIPV market is still relatively a niche market, so these products have not been exposed to the trend of cost reduction that the industry has seen with traditional PV modules.

The Future of BIPV

BIPV installations are increasing every year. Architects and designers are developing new, creative ways to utilize these products and developers are incorporating them into green

housing tracts, while manufacturers continue to create new products to meet this market niche. Some companies, such as Sanyo, Schott Solar, Sharp, and Suntech, are working on new BIPV products for facades, skylights, and windows. As the PV market develops and continues to grow at a record pace, keep a close eye on this exciting and creative way to integrate PV technology into the home.

Access

Paul Mync (paulmync@hotmail.com) has been installing, designing, troubleshooting and maintaining PV, solar hot water, and radiant heating systems since 2002. He has worked around the world on PV systems ranging from 100 watts to 18 megawatts. Paul also is an instructor for Solar Energy International.

BIPV Product Manufacturers:

Atlantis Energy Systems • www.atlantisenergy.org

BP Solar • www.bpsolar.com

GE Energy • www.gepower.com/solar

Lumeta • www.lumetasolar.com

Sanyo • www.sanyo.com

Schott Solar • www.us.schott.com

Sharp • www.solar.sharppusa.com

SunPower • www.sunpowercorp.com

Suntech • www.suntech-power.com

Uni-Solar • www.uni-solar.com





Alternate Energy Technologies, LLC.
"America's Premier Solar Collector Manufacturer"




**Be Proud Of
Your Sun**

Capturing a clean renewable
energy source to provide
reliable solar water heating
since 1975.

Visit us at www.aetsolar.com or contact us at 800.874.8190

**Currently seeking distribution partners and installers in many areas.*



MITSUBISHI ELECTRIC

SOLAR ELECTRIC INNOVATIONS



LIFE
powered by the sun

With more than 33 years of experience in the solar electric industry, Mitsubishi Electric is an industry leader in developing high-efficiency **photovoltaic modules** that deliver clean, reliable energy to homes and businesses.

Mitsubishi Electric has made a commitment to protecting the environment and we are proud to use **100% lead-free solder** in our solar panels. For more information, please call 714-220-2500 or visit our website:

www.mitsubishielectricsolar.com

Harvest the power of the Sun

Season after season,
the sun gives its light to the earth,
allowing life to bloom.

Every day a limitless crop of free,
clean energy reaches our planet.

Stiebel Eltron manufactures all the tools you
need for a successful thermal solar harvest.
And we've been doing so since 1976.


From our highly efficient flat plate collectors and
storage tanks to our complete line of mounting
hardware, pump stations, controllers, and
accessories, we have it all.

Stiebel Eltron is your one stop solar shop.

SOLKIT 2 includes:



SBB 300 Plus Storage Tank

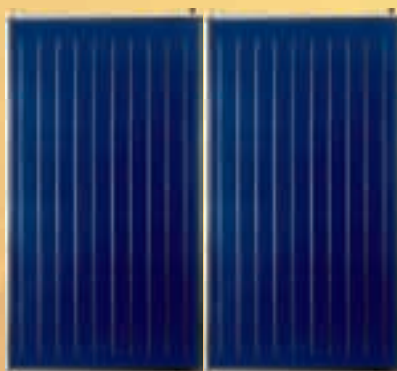

**2 x SOL 25 PLUS
Flat Plate Collectors**



**Pump station with
SOM 6 Controller**

Because every installation is
different, we have a full line of
SOLKITS and mounting
hardware kits available. All
components and accessories are
available for individual sale.



STIEBEL ELTRON
Simply the Best

TOLL FREE **800.582.8423**
info@stiebel-eltron-usa.com

www.stiebel-eltron-usa.com

SOLAR SITE ASSESSMENT

by Justine Sanchez


With PV modules, energy production is golden—as long as sunshine is hitting them. But shade (and even partial shade) can make your modules as useful as garden gnomes.

A PV module's output is directly proportional to the amount of sunlight hitting it. Modules produce electricity when photons—little packets of energy contained in sunlight—hit the cells and knock available electrons loose and into motion. When fewer photons hit the PV cell, for example due to haze or poor orientation, fewer electrons are put into motion, and less electricity is produced. But shade—even a small amount—can in some cases shut down production completely.

Solar Pathfinder



Solar Pathfinder's dome reflects the horizon over a sun-path diagram.

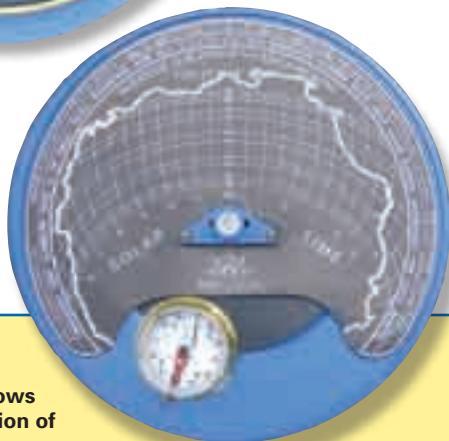

A horizon line sketched onto the sun-path diagram allows for manual computation of solar exposure.

Most modules are manufactured with built-in bypass diodes that can help mitigate the effects of partial shading (see “Bypassing Shade” sidebar), but even a shaded row of cells can disable the module. Shading's impact necessitates careful site planning and design considerations for solar-electric arrays.

Most sites will have at least some shade to consider, whether it is a neighbor's multistory home or trees on your property. And while wide-open, dawn-to-dusk exposure is ideal, PV system designers generally shoot for a shade-free solar window from 9 a.m. to 3 p.m. (“solar time” for all days/months of the year). These are the hours the majority of solar radiation is available. However, local climate variations may affect that. For example, in some areas, early morning fog can shift the “prime” solar window toward sunnier afternoon hours.

Solar Site Analysis Tools

Predicting shading throughout the year from various obstructions—such as tall trees, nearby buildings, roof dormers, and even chimneys—can be challenging if done

A digital photo of the Pathfinder's dome can be imported into the Assistant software to produce shade analysis reports.



by sight alone, requiring many observations over the course of the year. But several tools, including the Solar Pathfinder, the Acme Solar Site Evaluation Tool, and the SunEye, can help you quickly assess shading on your site throughout the year—with one site visit. Although these tools differ in technique and price, all will get the job done. All require that they be used at a proposed array location to evaluate it.

Solar Pathfinder (\$299; with case and tripod) • www.solarpathfinder.com

With its easy-to-tote case and simple instructions, the Solar Pathfinder has been a common solar site analysis tool since the late 1970s. It uses a clear plastic dome over a sun-path diagram to show surrounding obstructions. This device is first oriented and leveled, then users can take a digital photograph of the setup for use in the software program, or trace the superimposed reflections onto the black chart with a white pencil, which reveals which months and times of day objects may shade the array (see photos, opposite page).

Courtesy www.namastesolar.com



Architectural details, such as shed dormers and chimneys, can create shade during certain times of the day and reduce a PV system's production.

Sun-path charts for different latitudes are available, and each chart includes solar data to show the percentage of sunlight available for each hour of each month. The Solar Pathfinder Assistant software is used with digital photos of Pathfinder readings to generate detailed shading analysis reports (\$139; Windows only—Apple computers require running a Windows emulator such as Parallels Desktop for Mac). The Solar Pathfinder Web site hosts several helpful videos on setup, performing a shade analysis, and using the software.

Acme Solar Site Evaluation Tool




Left: The ASSET makes quick work of shooting a panorama of photographs.

Below: A single panoramic image stitched together from the site photos and overlaid with a sun path.

Right: Yearly solar data and shading factor are calculated by ASSET's software.



Courtesy www.we-llc.com (3)

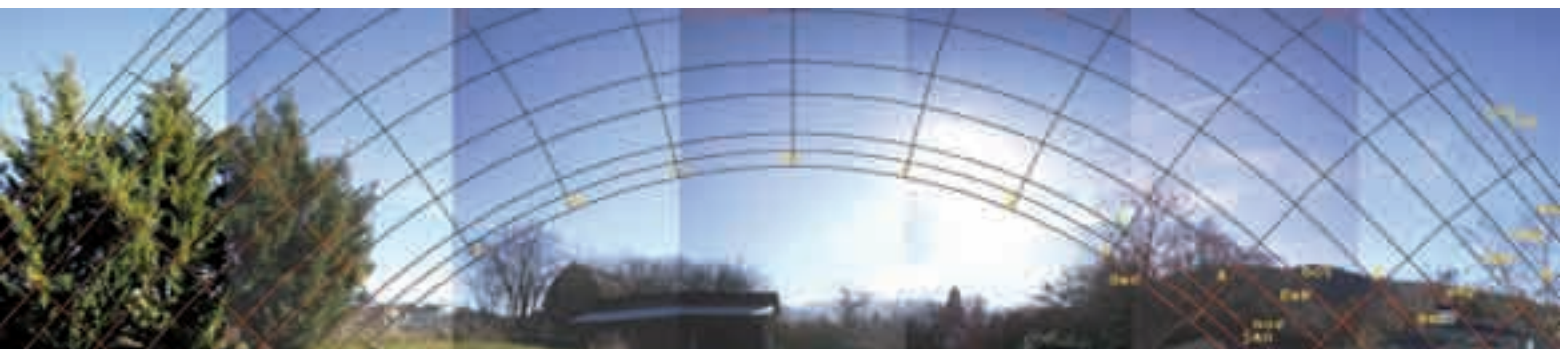

Wiley Electronics Acme Solar Site Evaluation Tool (ASSET) (\$599; includes camera, positioning hardware, software, and case) • www.we-llc.com

The ASSET uses software and a digital camera mounted to an adjustable base that's fitted with a compass. Users level and orient the camera on its specialized mount and take several photos (at set sequential azimuth angles). Photos are downloaded onto a computer, where the accompanying software "stitches" them together in a panoramic view from the perspective of the proposed array location. A sun-path diagram is superimposed over the photo, showing obstructions that may pose a shading threat. Once you have entered your particular "project preferences" (including state and city, camera angle, array configuration, etc.), the software calculates "shading factor data," reported as the percentage of light shaded for each month and an overall "shading factor" for the location. Just like the Pathfinder, the ASSET can easily be set up in several locations so you can compare your options and find the best location for your array.

Solmetric SunEye (\$1,495; includes software, case, and AC battery charger) • www.solmetric.com

The SunEye is a handheld solar site analysis tool that integrates a fish-eye lens, digital camera, touch-screen interface, and software. This device captures whole-horizon images for a site and generates shading analysis reports on the touch screen for instantaneous feedback. When taking a measurement, you first select your state and nearest city, orient and level the device, and then snap your picture. The touch screen can report the percentage of annual sunlight available and summer versus winter sunlight, along with



The Solmetric SunEye uses a fish-eye lens to shoot a 360° photo.

monthly averages. Reports can also be transferred to a PC via the included USB cable and software package (Apple computers require a Windows emulator). A GPS add-on (\$295) can obtain latitude and longitude coordinates (± 3 meters) for more accurate sun-path calculations.

All three tools include bubble levels and compasses, as they must be leveled and aligned to true south (or north in the Southern Hemisphere) before each measurement. Measurements must be obtained exactly where the array may be placed. For instance, if you are considering a rooftop-mounted array, measurements must be taken from the roof. If it's a pole-mounted array you're after, you'll need to take your measurements from a ladder or scaffold set up at the array's proposed height. Take readings at each corner of the proposed array location, and at the top and bottom to assess the solar window over the entire area. You may find that the lower portion of the array would be shaded due to objects on the horizon, or that architectural details (overhangs, dormers) or overhanging foliage creates shading problems on the upper portion of the array.

Shading Solutions

You've spotted potential shading in the prime solar window on your property. What now, get out the chain saw? You may have options to either locate the array away from the shaded area or move (or remove) the obstruction. If shading will hit the lower part of your array, you may be able to move the array further up the roof or, with a ground-mounted system,

(continued on page 50)

Bypassing Shade

In PV modules, diodes—semiconductors that allow current to flow only in one direction—provide a path for electrons to bypass a shaded section of a module. The more bypass diodes, the better the shade mitigation.


While some flexible thin-film modules incorporate bypass diodes on every cell, standard rigid crystalline PV modules typically provide only one bypass diode per 18 or more cells, since bypass diodes can only be wired in the module junction box. (Note: Even modules that come prewired with "quick connects" have small junction boxes that house these diodes.) For example, a 36-cell module will typically have only two bypass diodes. Each diode is wired across 18 cells, essentially isolating one-half of the module. In this case, one completely shaded cell would cause 50% of that module's output to be lost. With a 48-cell module that has three diodes, one shaded cell would cause a loss of only 33% of the output.

If shading happens to more than one cell, the impact will depend on how much shading occurs and where it occurs. If several cells in each section of the PV module are shaded, then pathways for the electricity for that module are shut down and the module is disabled. (For more information, see "Bypass Diodes" in *HP107*.)


Site Survey with the SunEye

Unfavorable Site


Courtesy www.solmetric.com (6)

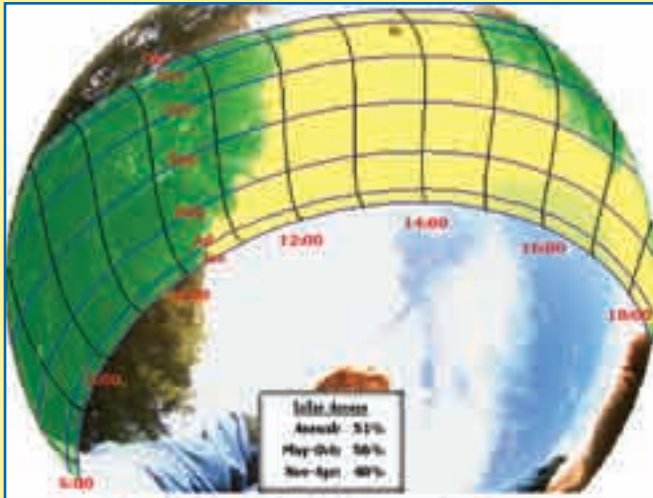

The sun path imposed over the photo reveals excessive shading at this site, especially during the winter months.

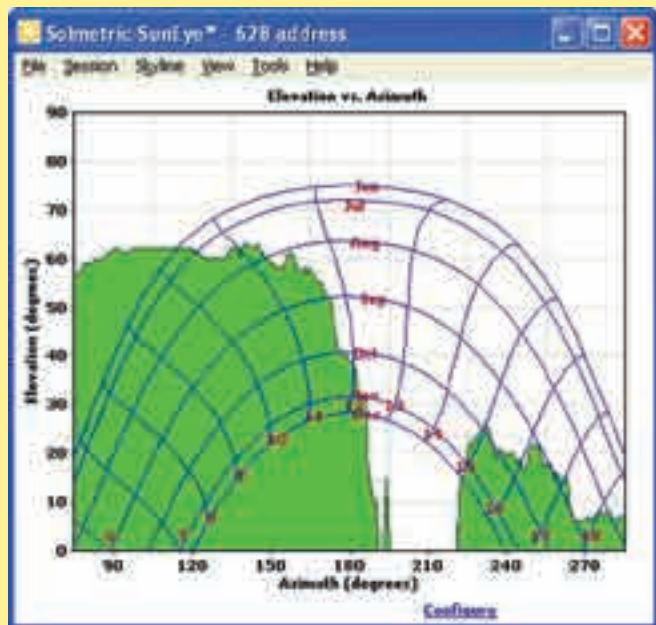


Another screen plots shading obstructions against a sun-path diagram, accurately showing the available solar window.

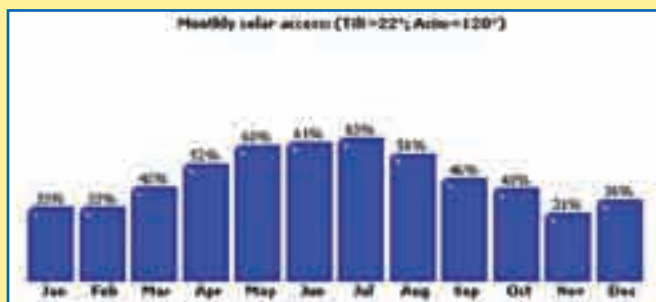


Users can toggle to another screen to see monthly solar access shown by a percentage.

Favorable Site

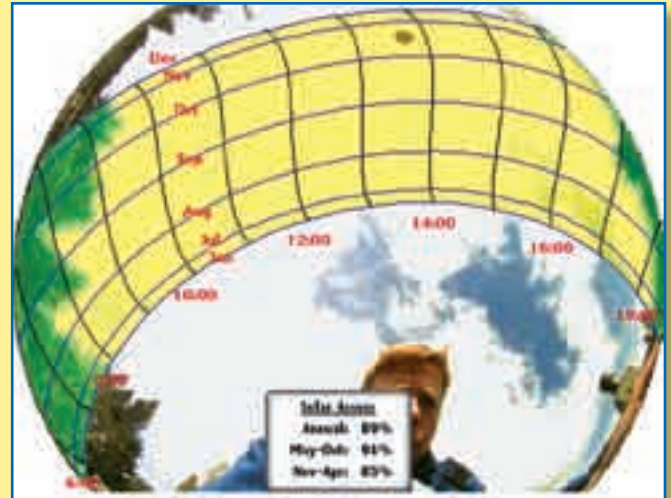

Even in the winter, this site experiences full solar exposure from midmorning to late afternoon.

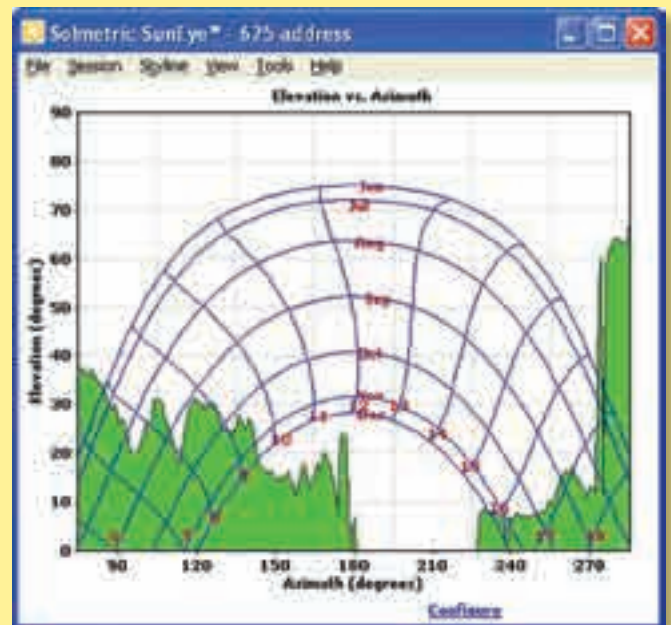

This chart reflects that a favorable solar window occurs at this site during most months of the year.



The graphs reaffirm what could be seen in the top images but with empirical detail.

elevate it. You also may want to consider a pole mount. If the eastern side of the array is threatened by shade, perhaps you can locate the array more westward. If trees or bushes are shading culprits, consider trimming (or transplanting) them.

In some cases, reaching for your chain saw can cause other problems. Well-placed trees, like those on the west side of homes, can provide much-needed shade during the summer months—removing them can increase the cooling load on the home and increase demands on your air conditioner or fans. This might negate the increase in energy from the PV array that you gained by cutting down the shading offender. Also, remember that trees and bushes grow, so consider future growth (and shading effects) in your array siting and yard maintenance plans.

The software programs for the Solar Pathfinder, ASSET and SunEye can all simulate the effect that removing or adding an object has on your system—for example, how a solar window could be improved by trimming a tree or how much sunlight would be lost if that proposed power shed is constructed too close to your ground-mounted PV array.

If You Can't Escape the Shade

Partial shade and reduced power production affect different systems in different ways. In a stand-alone (off-grid) PV system, even minimal shading can have a big impact. Since shading reduces energy production, this may necessitate more careful load management (reducing energy consumed) or, if a

generator is used, increased run-time (and the associated fuel consumption, pollution, and maintenance). If shade affects your PV system's winter production, perhaps a hybrid PV-wind or PV-hydro system could be a solution.

For a grid-tied PV system, partial shading is not as critical—it will merely reduce the amount of utility power the system offsets. All of the mentioned site analysis tools can estimate energy loss due to shade. Because it is important to create realistic energy estimates, these losses should be factored into the amount of projected annual energy production for a grid-tied system. In some cases, you may be able to increase the array size to offset the losses due to partial shading.

Given the knowledge and tools to perform a proper solar site analysis, PV system designers can ensure that their systems will not suffer needless energy reduction due to shade. PV systems are substantial financial investments and can only produce electricity if they have sunlight to work with, so it makes sense to make sure they are properly placed to maximize your green energy and your wallet power.

Access

Justine Sanchez (justine.sanchez@homepower.com) is a NABCEP-certified PV installer, *Home Power* Technical Editor, and Solar Energy International instructor. Justine lives, works, and teaches from an on-grid, PV-powered home in Paonia, Colorado.



EASYFLEX

Solar Line System

**Insulated Flexible
Stainless Steel**

Installation












15042 Parkway Loop #D
Tustin, CA 92780

easyflexusa.com
info@easyflexusa.com

888-577-8999
714-258-2600




ISO 9001:2000
QC-023-C(1)

INVERTER EVOLUTION

2002
Parallel
Stackable

2006
120/240VAC
Split Phase

2009 Apollo Solar Delivers...

Parallel Stackable, Split Phase,
2200 to 3600 VA, True Sine Wave
Off-Grid Inverter/Charger

ADDITIONAL SYSTEM OPTIONS...



Easy to Install
Switchgear Module



Local and Internet
Monitoring



Our Integrated
Solar Power Center




See Our
SPECIAL OFFER at

www.apollosolar.com

203.790.6400



Optimizing a PV Array

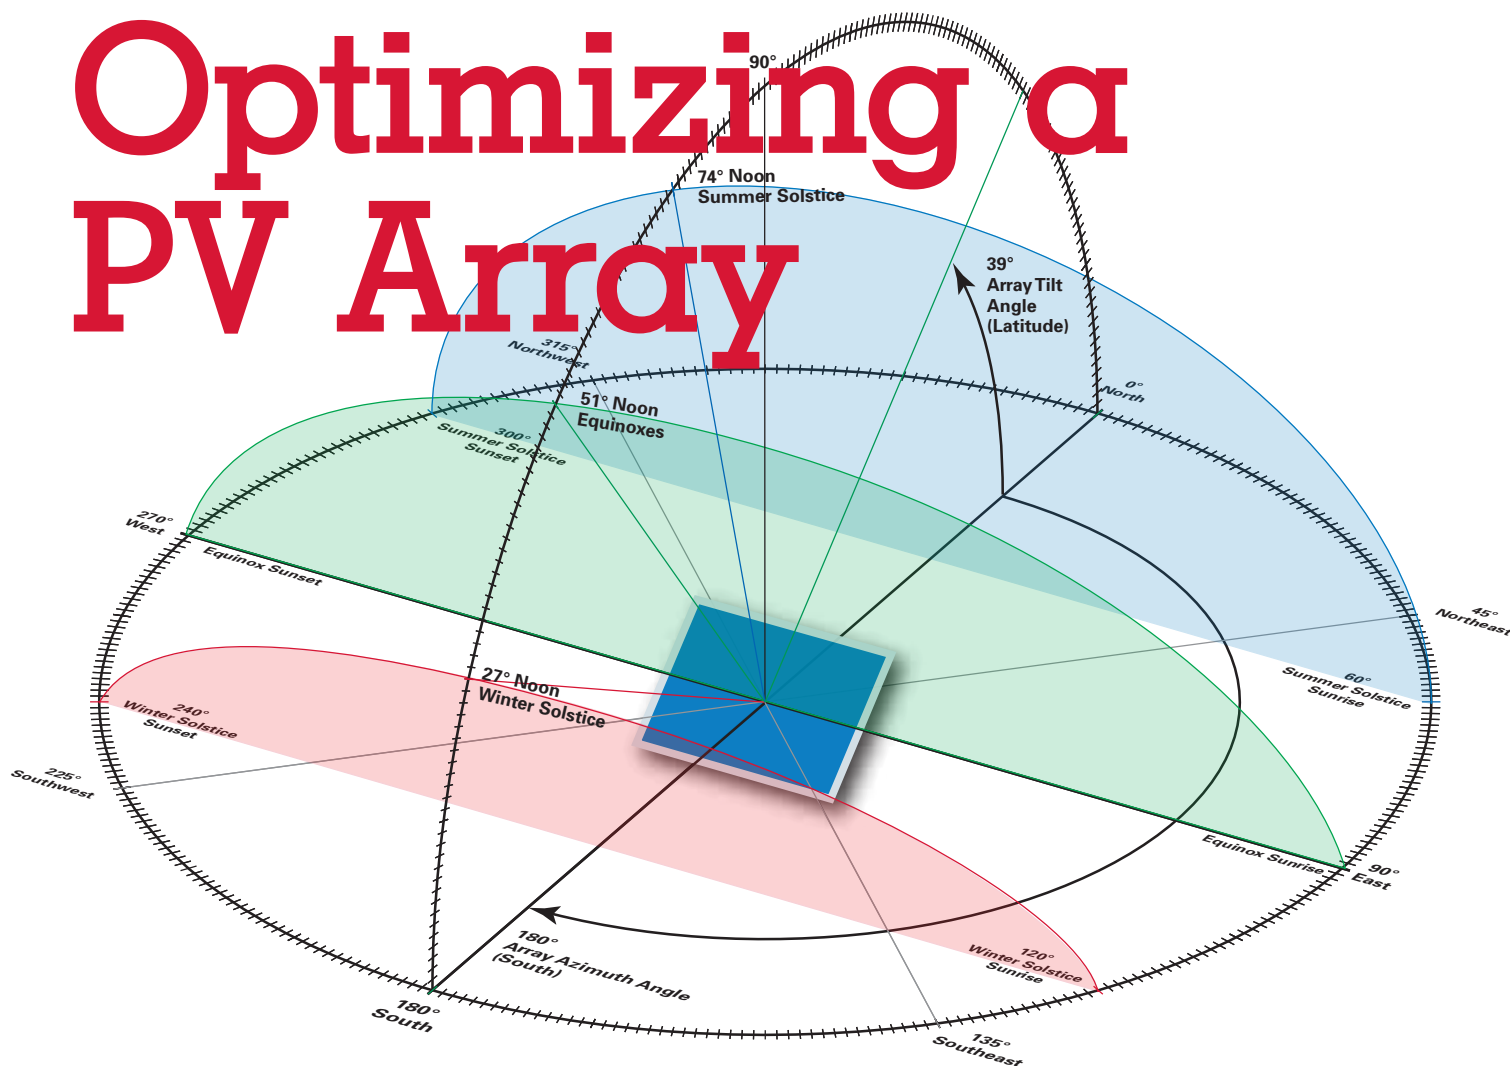

with Orientation & Tilt

by David Del Vecchio

"Just stick 'em in the sunshine, buddy," a coarse voice jabbed at me from the window of the second floor. Years later, I recall those words and chuckle. It must have been quite amusing for that carpenter to watch me methodically roam the grounds in search of the optimal site for the photovoltaic array.

Installing modules in a sunny, shade-free spot and pointing them toward the sun could be considered common sense to many, but properly orienting and tilting your array for optimal performance is not as intuitive. A PV array's output is proportional to the direct sunlight it receives. Even though PV modules produce some energy in a shady location or without ideal orientation, system costs are high enough that most will want to maximize energy yield.

Orientation: Beach Bum Lessons

Sun-worshippers working on their tans will orient their bodies to the sun for the most "exposure," changing their body position to coordinate with the sun's changing position. The lesson for PV arrays is that orienting directly toward the sun results in capturing the most energy—maximum power comes when they're perpendicular to the sun's rays.

Trace the sun through the sky and you'll notice two things changing. Throughout the day, its elevation (angle to the horizon) changes, rising to reach its maximum height at "solar" noon. And its sweep from east to west also changes as the day progresses, depending on the latitude. At high northern latitudes in the summer months, for example, it may rise in the northeast and set in the northwest. The angle it sweeps is known as the "azimuth" angle. Both the elevation and azimuth angle change with the seasons.

Most PV systems are mounted on racks in a fixed position, usually on a rooftop, and don't have the capability to follow (track) the sun throughout the day. Considering this, the best

Courtesy www.seesolar.com



In lower latitudes, PV arrays with shallow tilt angles capture more of the sun's energy.

Courtesy www.namastesolar.com



In higher latitudes, steeper tilt angles catch the low-angled sun and help the array shed snow more easily.

orientation in the Northern Hemisphere is usually due south. However, there are site-specific exceptions to the rule. For example, if your site consistently has fog or clouds at one end of the day, then favoring an orientation away from these times may result in better production from your array.

Correct Your Compass

Before you use your compass to site an array, you must correct for your site's declination error. In the Northern Hemisphere, a compass needle aligns itself along the *magnetic* north-south line. A PV array should be oriented to "true" or "solar" south ("geographic" south), so you'll need to account for magnetic declination—the angular difference between true and magnetic north. The main cause for this discrepancy is the Earth's non-uniform, conductive, fluid outer core that consists mainly of iron and nickel. This layer pushes your compass needle off of true north. Depending upon your location on the planet, the "push" varies in strength and direction. (See *HP120*, "Finding True South the Easy Way.")

The National Oceanic and Atmospheric Administration (NOAA) maintains a Web site that gives up-to-date magnetic declination values for the United States (see Access). Input your zip code in the form, and it provides your current magnetic declination. For example, in Port Angeles, Washington, the angle of magnetic declination is 17.5° east.

Accounting for declination is fairly straightforward using a compass: If your magnetic declination is *east*, then you *subtract* your declination from the magnetic north (0°; 360°) and magnetic south (180°) readings to get your "true" directional readings. Using our Port Angeles declination of 17.5°E, true north and south align with 342.5° (360° – 17.5°) and 162.5° (180° – 17.5°). To correct for


a *west* declination, *add* the declination to 0° (360°) and 180° to get your true directions.

Tilt, Latitude & Altitude



With solar south determined, the next step is to find the optimum tilt for the array. Because a PV module performs best when its surface is perpendicular to the sun's rays, considering the sun's elevation in the sky is important.

In the Northern Hemisphere, the sun rises to its greatest height at noon on the summer solstice (about June 21). It sinks to its lowest angle at noon on the winter solstice

Magnetic Declination in the United States

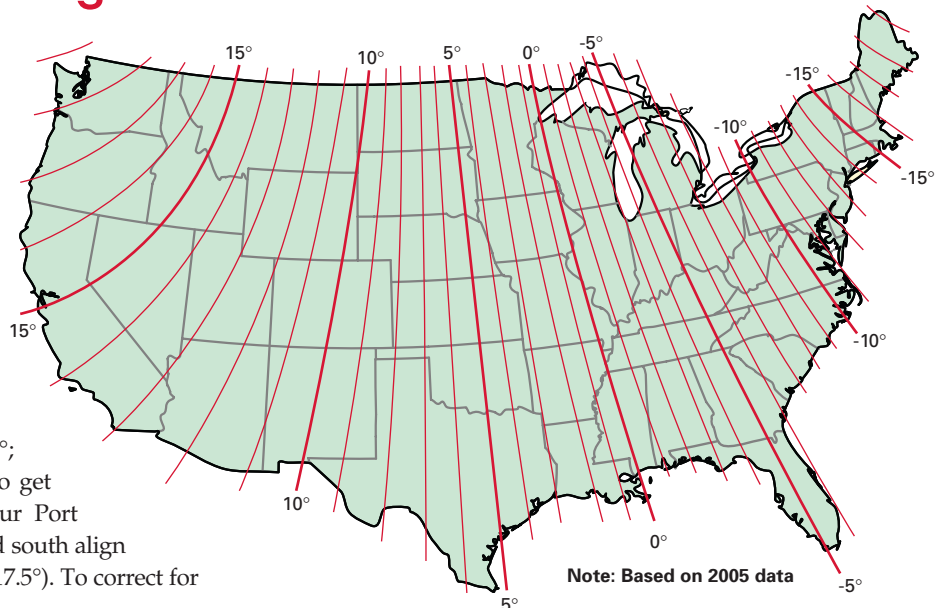

Sun Paths for Seattle & Miami

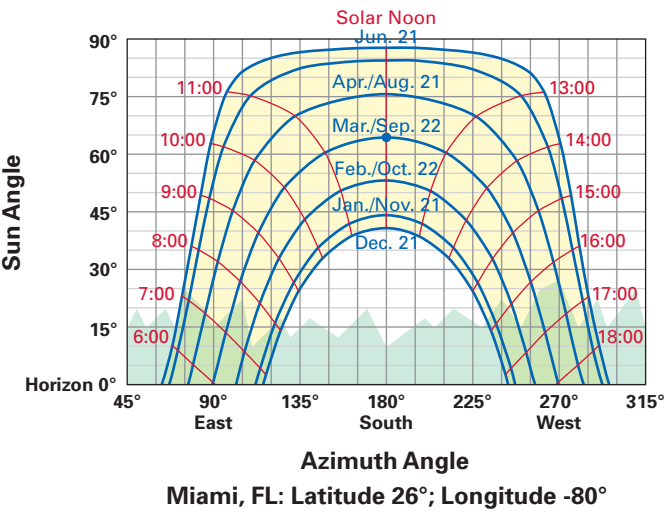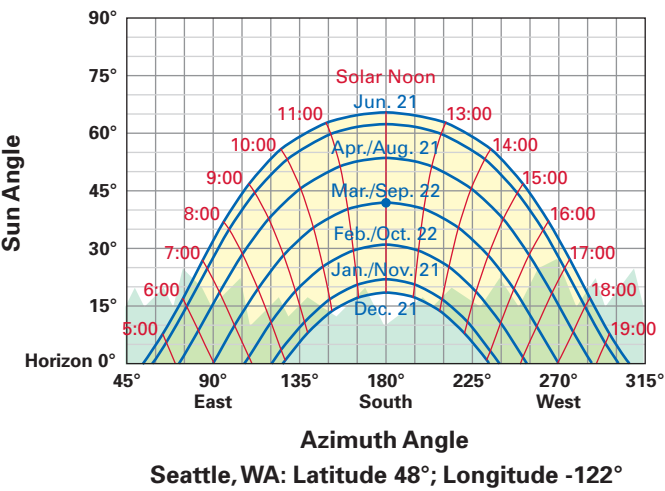

(about December 21). These elevations vary depending on your location’s latitude. In Seattle, Washington, which sits at 47°36’N latitude, the solar-noon elevations span from 19° in winter to 66° in summer. In Miami, Florida, which has a latitude of 26°N, these angles span from 41° to 88°.

Typically, fixed (non-adjustable) PV arrays should be tilted toward the sun’s “average” elevation—equal to the latitude of the array’s location—to capture the most year-round solar energy. For example, I live at about 36°N latitude. Generally, to produce the most energy over an entire year at my location, a fixed array should be oriented to true south and set at a tilt of 36° from the ground.

With an adjustable-tilt rack—and the willingness to do the chore—an array’s output can be increased by 5% or more.

Again, local weather conditions may require special considerations. Very cloudy winters coupled with very clear summers will push the ideal PV tilt to shallower angles. Where snowy winters predominate, a steeper angle may be best for the modules to shed snow. Be sure to pay attention to your local weather patterns.

Another option is an adjustable mount, which can be ground-, pole-, or roof-mounted. The standard adjustment is to add 15° to the location’s latitude for the winter tilt angle and subtract 15° from the latitude to arrive at the summer tilt. Adjusting twice a year on the spring and fall equinoxes can increase production by about 5%—with quarterly adjustments, a little more can be gained. In the winter, especially, these few extra kilowatt-hours can be crucial to an off-grid home, but most on-grid system owners choose the simplicity of a fixed array.

Dealing with Roof Pitch & Orientation

Most homes are not perfectly oriented for a roof-mounted PV array, but that shouldn’t dissuade your plans to have solar-generated electricity.

For roofs that do not face south, one option is to rotate the PV rack to orient the modules south. This maximizes energy production—but by how much and at what visual cost? An oddly racked PV array is unacceptable to some people



Array Tilt & Azimuth: Effects on Efficiency

	Parallel to Roof (Flush-Mounted)	Optimal (Tilted at Latitude)
Azimuth angle	210° (Southeasterly)	180° (True South)
Array tilt	18° (4:12 pitch)	35°
Annual production (kWh)	1,468	1,550
% of optimal production	94.7%	100%

Source: PVWatts; based on 1 kW array in Amarillo, Texas

Tracked or Fixed?

PV racks fall into two main categories: fixed (nontracking) and tracking. Without any moving parts to fail, a fixed rack is steadfastly reliable, but lacks the capability to keep the modules perpendicular to the sun throughout the day. Trackers follow the sun's position from horizon to horizon. However, the tracker's moving parts require maintenance, and add parts to the system that can fail, decreasing reliability.

A single-axis tracker follows the sun from east to west, but does not automatically follow the sun's elevation, though the mounts can be adjusted seasonally. Dual-axis tracking keeps the array pointed right at the sun throughout the day, without human intervention. Dual-axis tracking can increase array output as much as 40% compared to a fixed array (see "Array Tracking & Energy Production," below).

Tracked systems can significantly increase energy production if the site has no shading. Trackers can really pay off when the east and west horizons have minimal blocking (from trees, buildings, or mountains) or if midday weather is often cloudy. They work great for array-direct pumping where water is needed all day. But with the considerations of added cost and a minor decrease in reliability, many system owners choose a fixed rack. If, for the same output, the cost of adding more PV modules is less than or equal to the added cost of a tracker, then it is almost always better to go with a fixed array.

Array Tracking & Energy Production

Location	Fixed Mount (kWh/Day)	Dual-Axis Tracked (kWh/Day)	% Increase
Sacramento, CA	2,799	3,909	39.7%
Jacksonville, FL	2,571	3,372	31.2%
Newark, NJ	2,366	3,073	29.9%

Source: PVWatts; 2.0 kW array



Courtesy www.habit-tek.com

In the right situation, a tracker can increase array production significantly.

for aesthetic reasons, and may even be disallowed in some communities with homeowner's associations or architectural review boards. While an east- or west-facing array usually won't produce as much energy as a south-facing one, the losses are often less than expected. An array oriented 30° off of true south will typically suffer less than a 5% reduction in production compared to one oriented to true south.

While the best annual performance generally comes from a PV array that's mounted at a tilt equal to your location's

latitude, your roof pitch may not match this parameter. Don't worry—an array tilted 15° off from your latitude will still produce 95% of the energy from an array tilted at latitude. For aesthetics and to reduce wind loads, the vast majority of residential roof-mounted PV arrays are installed parallel to the roof plane.

Compare the energy production of the two different racking scenarios for a 1 kW PV array in the "Array Tilt & Azimuth: Effects on Efficiency" table on the opposite page.

Effects of Orientation on PV Production

Array Tilt	East		Southeast		South		Southwest		West	
	Annual kWh	% of Optimum	Annual kWh	% of Optimum	Annual kWh	% of Optimum	Annual kWh	% of Optimum	Annual kWh	% of Optimum
51°	1,121	72.3%	1,398	90.2%	1,495	96.5%	1,373	88.6%	1,085	70.0%
35°	1,228	79.2%	1,466	94.6%	1,550	100.0%	1,444	93.2%	1,197	77.2%
21°	1,293	83.4%	1,458	94.1%	1,517	97.9%	1,444	93.2%	1,272	82.1%

Source: PVWatts, 1 kW array, Amarillo, TX (35°N latitude)



Courtesy www.namastesolar.com

Subarrays at multiple orientations and tilts need special treatment, ideally independent MPPT inverters or charge controllers.

In this scenario, optimal orientation would translate into a more costly and awkward mounting system that will squeeze out only a few more kilowatt-hours per year. Again, slightly increasing the array size with the flush-mount option could make up for these minor losses.

Other Considerations

Many contemporary homes sport complex roof designs with multiple, pitched roof sections of varying sizes, dimensions, and orientations that can present a complex challenge to PV system designers.

A good design practice is to plan for using only about 80% of the area on any particular roof section, leaving enough space around the array for safe access. You may have two adequately sized roof sections with acceptable exposure that face southeast and southwest, and you need both of these sections to accommodate the size of the planned PV array. Ensure adequate solar exposure by checking for shadows from the rooflines, chimney, or HVAC equipment with your solar siting tool of choice (see Access).

Multiple Orientations & MPPT. Most residential grid-tied inverters have only one maximum power point tracker (MPPT) incorporated into their design. A MPPT constantly sweeps the array output to fine-tune its power algorithm, resulting in the maximum power output from the PV array. Modules experiencing the same environmental conditions, i.e., mounted on the same roof surface, can use a single MPPT. But PV modules on separate roof surfaces, whether at different orientations or tilts, experience slightly different environmental conditions and, therefore, different maximum power points. The best performance would come from

maximum power point tracking for each PV orientation, either by using multiple inverters or a single inverter with multiple MPPT capability.

Time-of-Use Metering. Typically, utility companies use a constant rate to charge a customer for each kWh consumed: A kWh consumed at 3 p.m. costs the same as a kWh consumed at 8 a.m. However, a growing number of utilities are offering time-of-use (TOU) metering systems that charge different rates based on when electricity is used. Rates are highest during peak hours (typically weekday afternoons) and lowest during nonpeak hours (early mornings and weekends). With net metering under TOU, any energy put back into the grid during peak times is counted at the higher rate—up to three times the value of off-peak electricity.

If you can optimize your grid-tied PV array performance to generate the most electricity during peak rate periods, you'll reap a bigger payoff and help out the utility grid when it needs it most. Examining various orientation scenarios within the context of a net-metering grid interconnection (PV electricity and utility electricity is valued at the same rate) can be a valuable exercise before you site your array. Utility peak times and rates typically vary with the seasons. Before you make a decision about orienting your system to favor TOU metering, check your utility's rates carefully.

Orientation, array tilt, seasonal adjustments, and array siting can all affect the bottom line. Proper planning and smart design will help you get the most out of your PV system and improve your rate of return.

Access

David Del Vecchio (david@solarvillage.com), a mechanical engineer from Georgia Tech, began designing and installing PV systems in 1998 in North Carolina. He's a NABCEP-certified PV installer and owns Solar Seed, a consult/design business. David also teaches PV courses for Solar Energy International, the North Carolina Solar Center, and Central Carolina Community College.

NOAA • www.ngdc.noaa.gov/geomagmodels/Declination.jsp • Magnetic declination calculator

<http://solar.dat.uoregon.edu/index.html> • Sun-path diagram calculator

<http://www.srrb.noaa.gov/highlights/sunrise/azel.html> • Solar position calculator

PVWatts • http://rredc.nrel.gov/solar/codes_algs/PVWATTS • Solar energy calculator

Solar Siting Tools:

Solar Pathfinder • www.solarpathfinder.com

Solmetric • www.solmetric.com • SunEye

Wiley Electronics LLC • www.we-llc.com • ASSET





SolarWorld. As renewable as it gets.

SolarWorld integrates responsibility for the entire life cycle of our products at every step. We start by manufacturing our Sunmodules so that they produce more energy per rated Watt than competing products. With SolarWorld's industry-leading 25 year warranty, that adds up to a lot of kilowatt-hours – and a lot of avoided CO₂.

American-made Sunmodules are free of toxic materials, so after 3 or 4 decades of generating clean renewable power, you can dispose of them as you see fit. But we hope you'll send them back to us because SolarWorld established the world's first cradle to cradle PV recycling program.

To make our products any more renewable, we'd have to grow them on trees.

1-866-226-5806
service@solarworld-usa.com

SolarWorld. And EveryDay is a SunDay.




www.solarworld-usa.com

green

FRAMING OPTIONS

by David Johnston & Scott Gibson

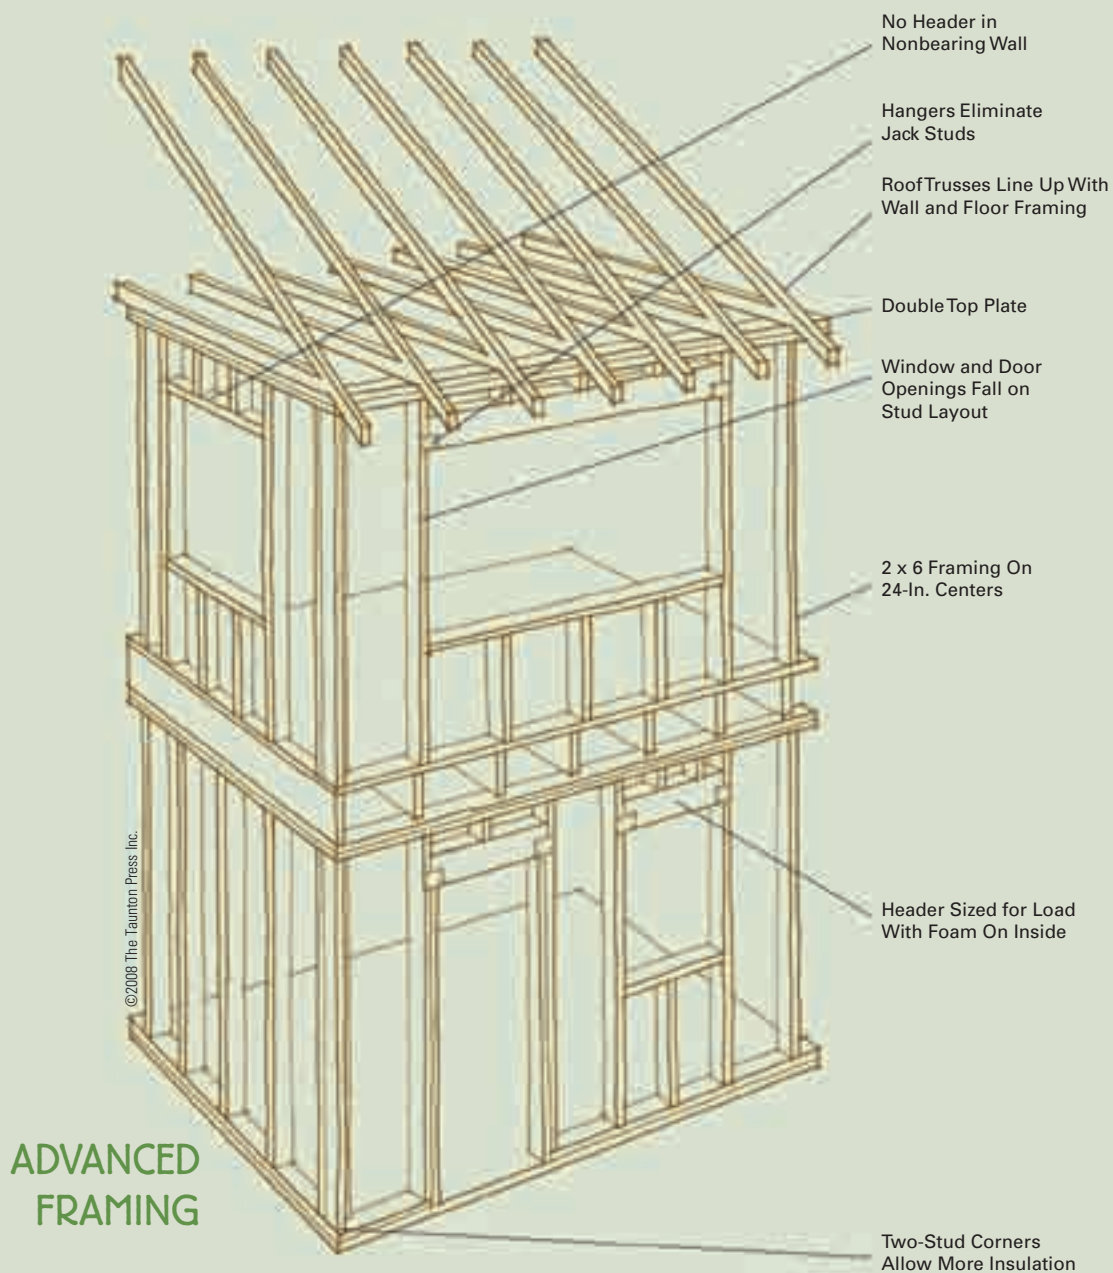

ADVANCED
FRAMING

A tremendous diversity of materials, techniques, and traditions have gone into building a home's framework. Some approaches, like rammed earth, adobe, and straw-bale construction, are now well-established—if still unusual—alternatives to more mainstream techniques. Other materials are newer: blocks of aerated concrete, structural insulated panels that combine polystyrene or urethane foam insulation in a sandwich of oriented strand board, and hollow blocks formed with a mixture of cement and recycled polystyrene or wood fiber.



These materials all have their advocates, and they all have something to offer “green” building. But with the exception of structural insulated panels (SIPs), many of these products can be difficult to obtain or they require techniques unfamiliar to most contractors. For most residential builders in the United States, wood reigns supreme. So how can we build better and use this resource wisely?

Improving on Conventional Framing

Wood is one of the best-suited renewable materials used in construction. It has low embodied energy, natural durability, high strength, and low toxicity (when untreated). Ninety-five percent of single-family houses built in the United States today are “stick-framed” with dimensional lumber.

Many conventionally framed houses share a common problem that affects their “greenness.” There is often too much framing—oversized headers, too many studs placed too close together, and framing that gets in the way of insulation. Call it habit, tradition, or insurance on the part of the builder—the bottom line is that these and other wasteful practices make building envelopes more expensive and less efficient than they could be.

In the late 1970s, during an energy crisis that was likely a practice run for what's to come, the National Association of Home Builders' Research Foundation conducted studies to identify what structural configuration was necessary to maintain superior strength and yet allow the maximum insulation in wall cavities to improve energy efficiency. The result was called optimal value engineering (OVE). Research showed that as much as 20% of the framing material used in traditional construction could be removed

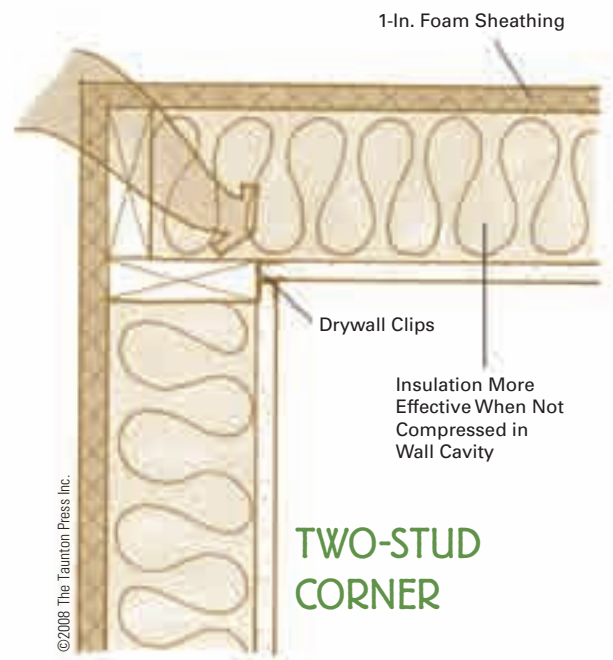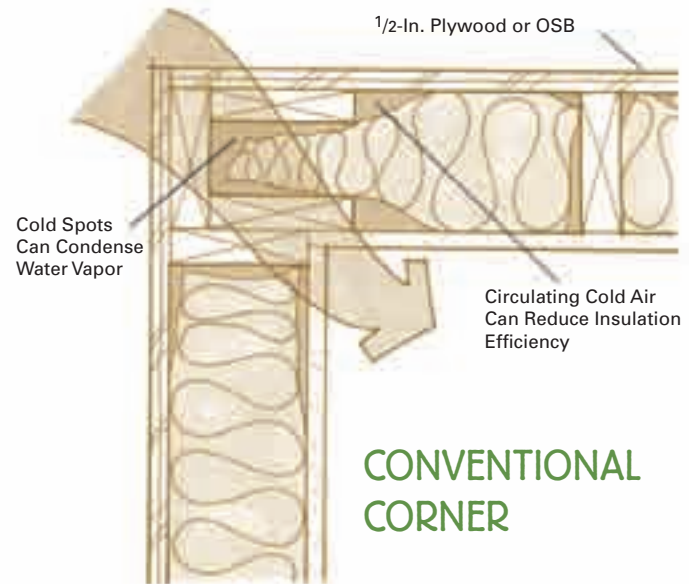

Courtesy What's Working



Wasted lumber adds up in unnecessary framing around door and window openings. Much of this lumber serves no practical purpose and makes the building less energy efficient, costs more, and takes more labor.

without compromising structural integrity. Today, OVE is just referred to as advanced framing.

Advanced framing has two main benefits. First, it eliminates framing members that serve no structural purpose, thereby reducing waste and unnecessary cost. Second, it leaves more room for insulation and reduces cold spots from thermal bridging, making the house more comfortable and less expensive to heat and cool. Here are some of the basics:

- Walls are framed with 2 by 6s on 24-inch centers rather than 2 by 4s on 16-inch centers to increase insulation depth and reduce thermal bridging.
- Corners are made from two studs rather than four to allow more room for insulation and to reduce thermal bridging.

- Headers are sized according to the load they actually carry, not to conform with arbitrary guesswork or building traditions.
- Roofs are built with trusses rather than conventional framing, reducing the amount of lumber that's needed.
- Floors are framed with I-joists rather than sawn lumber, making stiffer floors that use less material.
- Insulating sheathing replaces conventional plywood or oriented strand board, reducing thermal bridging and making the house cheaper to heat and cool.

We Have Tree Farms, Not Forests

Wood has attractive advantages as a building material, but the stupendous volume of material that goes into residential construction creates a variety of interrelated problems. Homebuilding consumes about 45% of the total lumber used yearly. This year, new residential home projects are predicted to consume 9.5 billion board feet.

One of the biggest controversies in the world of green building is how trees are forested. More than 95% of the original forests in the United States have been razed. Yet, according to the American Forest and Paper Association, there are more trees in the United States now than there were when the Pilgrims landed in Massachusetts nearly 400 years ago. On the surface, that seems like a good thing, but once we dig deeper into the issue, our views may be more tempered.

During the expansion of European-American culture, forests seemed endless and empires were built on what could be harvested. Replanting was unnecessary because there were so many trees yet to cut. As the resource became more depleted, tree farming became a good business practice and tree plantations began springing up across the country. Today, most "forests" are actually tree plantations.

It is only when we visit the tiny pockets of remaining ancient forests that we realize what a profound difference there is between a tree plantation and a natural forest ecology. It takes hundreds of years for a forest to regain its complex interconnections of life-forms and the inherent stability that goes along with them. Clear-cutting a forest only to replant with a single species destroys the forest ecosystem.

Lost habitat decimates natural animal populations. Because they are artificial environments with a lack of natural diversity, tree farms are not places where people want to backpack, hike, or fish. So people flock to our overrun national parks, now so overcrowded they are barely managing the flood of people looking for a glimpse of the real thing.

Reduce Waste & Use Certified Wood

As concerns have mounted over how forests are managed, a number of



Courtesy Forest Stewardship Council

FSC-certified lumber relies on a chain of custody that tracks lumber from the forest to the point of sale.

programs have popped up to certify that lumber harvesting is causing no long-term damage to either the environment or the people who live nearby.

Lumber certified by the Forest Stewardship Council meets standards designed to protect the forest and the people who live there. The standards were adopted internationally in the mid-1990s and include strict requirements for how timber is harvested, how much can be cut, and how the forest ecology is to be protected. The program also mitigates problems when indigenous people are affected by lumber harvesting. FSC relies on a "chain of custody," to track wood from the forest to the point of sale. Each forest, mill, distributor, and retailer must be certified to preserve the integrity of the lumber's sustainability.

FSC protects existing forests from conversion to single-species tree farms, and ensures that the lumber you are buying is sustainably harvested.

Clear-cutting forests to create tree farms can wipe out entire ecosystems.



Courtesy What's Working

IMPROVING ON CONVENTIONAL FRAMING

There are good methods to improve frames made the conventional way: that is, from 2 by 4s on 16-inch centers. Building Science Corp. found that wrapping the frame of a house with rigid foam insulation increased the overall R-value of the walls and reduced heat loss.

Some builders have switched from 2-by-4 to 2-by-6 construction because it makes deeper stud cavities for thicker insulation. If you're using fiberglass batt insulation, the nominal R-value jumps from R-13 (R-15 for high-density batts) to R-19 (R-21 for high-density). But spacing 2-by-6 framing on 16-inch instead of 24-inch centers creates structural overkill. Spacing the larger studs farther apart adds room for insulation and decreases thermal bridging.

Courtesy Kelli Pousson



Wood I-joists are made mostly from waste wood products and produce flatter and stiffer floor systems that are not subject to the same warping and checking as solid lumber.

In all, there are more than 50 different forest certification systems in the world, each claiming to monitor a certain amount of acreage. Others in North America include the Sustainable Forestry Initiative (135 million acres), the logging industry's American Tree Farm System (3.15 million acres), and the Canadian Standards Association (170 million acres). A new program, the European Programme for the Endorsement of Forest Certification (PEFC), is being developed to compare systematically all the certification programs globally so there is a common reference for wood procurement. The number and variety of these programs can be confusing. But the programs are at least a step in the right direction, and the benefits of specifying FSC-certified lumber will continue to make new converts among home builders.

Engineered Lumber Makes Sense

Using engineered lumber, which uses chips and small pieces of solid wood glued or laminated together, is another way to make sure that wood resources are not wasted—and

engineered products often result in a better house. Once the exclusive domain of commercial buildings and high-end houses, engineered lumber is now commonplace in conventional construction. Two things make this family of products green: engineered products use wood fiber more efficiently than solid sawn lumber, reducing waste; and they can be made from wood species that quickly regenerate themselves.

For example, I-joists are made partly of wood chips and use only half the fiber to perform the same structural function as solid timber. And they do the job better, with longer allowable spans than solid timber of the same width. In addition, they can be made from aspen or other species that regenerate: These trees are really the fruit that springs from an underground root system, undamaged when a tree is harvested.

Finger-jointed studs and glue-lams are another type of engineered lumber. Both are made from solid pieces of defect-free wood glued together to make larger pieces. Finger-jointed

Shawn Schreiner



Glue-lams are one type of engineered beam that can be used in place of solid material. They are straight, stable, and strong.

Finger-jointed studs are embraced by carpenters because they are predictably straight, eliminating a host of problems associated with warped dimensional lumber.



Courtesy What's Working

HIDDEN LAKE STUDY

In 2004, Pulte Homes, one of the largest home builders in the country, conducted a study on advanced framing at its Hidden Lake development in Tracy, California. Pulte built test homes to determine how much money advanced framing would save in construction and to study its effect on heating and cooling costs. The work was supported by the U.S. Department of Energy and the California Energy Commission. The per-home results were impressive:

- Using 2-by-6 wall framing on 24-inch centers cost \$1,632 versus \$2,749 for a conventionally framed house with 2-by-4 studs on 16-inch centers—a 40% savings in material costs.
- Advanced framing saved a total of 738 studs, amounting to more than 2,100 board feet of lumber.
- Energy costs in the advanced-framing house were a total of \$710 (both heating and cooling) a year, compared with \$1,003 per year for the conventionally 2-by-4 framed house.
- Whole-wall R-values jumped from 9.4 to 15.2 by switching to advanced framing.

studs have an important advantage over sawn lumber in that they are straight right from the factory—and do not warp afterward. Conventional studs are milled from fast-growing farm trees, famous for twisting, splitting, warping, and checking, making it increasingly difficult to frame a straight wall, which can cause all kinds of problems down the line.

Glue-lams are 2 by 4s or 2 by 6s that are glued together face-to-face to create a beam. Laminated veneer lumber is like plywood but in the dimensions of beams. Parallel laminated lumber is made from long strips of trees that are glued together lengthwise to create beams stronger than the tree itself. These replace large-dimension timbers used for long spans—over a garage door, for instance. Increasingly popular, they save old-growth trees and do the job better, stay straighter, and are typically less expensive.

All engineered wood uses a binder to hold the wood or wood fibers together, which can affect indoor air quality. For instance, urea-formaldehyde is a water-soluble glue that is used for indoor products such as particleboard and medium-density fiberboard. The binder off-gasses (releases) formaldehyde for up to five years and is a major contributor to poor indoor air quality. Phenolic resin off-gasses a mere 4% of the formaldehyde that urea does.

Timber-Frame Construction

In timber-framing, or post-and-beam construction, carpenters become craftspeople, using mortise and tenon and dovetail joints, with wood pegs holding the large pieces of wood firmly together.

Timber-framing provides the structure for the building, and insulation is then added between the posts. SIPs, straw

bales, and more conventional insulation can be used to seal the envelope. One advantage is that the frame can be erected quickly to get the building under cover and the infill added once the weather protection is in place.

Since big timbers are the cornerstone for this construction technique, one of the important considerations is where the wood comes from. Timbers should be chosen with care—local FSC certified, salvaged, or milled from standing dead trees are the best choices. Otherwise, there is the possibility that the large-dimension lumber has been taken from old-growth stands and/or clear-cuts.

Another issue is the amount of wood that goes into a timber-frame house. There's a lot of it, certainly more than would be used for a conventionally framed house or one that makes significant use of engineered lumber. Because a key element of green building is an efficient use of materials, there is a sustainability argument to be made that timber-framing is inherently a worse choice than a house built with advanced framing techniques.

Structural Insulated Panels

SIPs are a sandwich of insulating foam and oriented strand board that can be used for floors, walls, and roofs. SIPs are a green building product on every level. They combine insulation and structure in a single product. Houses built with SIPs are efficient, comfortable, and have virtually no air infiltration. Heating and cooling costs are typically half or less of a conventionally built and framed house.

With SIPs, some initial cost savings come from rapid enclosure of the envelope, especially when building in cold weather. Once the frame is up, you can work in an insulated space—and that means jackets come off and productivity goes up. When the job is finished, you have an airtight, highly insulated envelope that also helps cut noise inside. Moisture and mold issues inside wall cavities are thwarted because these units are completely sealed.

Structural insulated panels sandwich foam insulation between two skins of oriented strand board, combining insulation and structure in a single component.



Courtesy What's Working



Courtesy EcoFutures Building

Electrical wiring for switches and receptacles is run through wire chases built into these SIPs.

However, observe several cautions when building with SIPs. First, make sure to protect the oriented strand board on the faces of the panels from water. The OSB gives the panels structural strength. If it gets wet and stays wet, it loses its integrity. Once they're up, careful flashing is also key.

The second issue is running electrical cable. SIPs are made with channels in the foam to accommodate wiring. When ordering, it is imperative to provide an electrical plan so the manufacturer knows where to run these chases. Plumbing should never be run in an exterior wall, so typically there are no chases provided for that purpose.

There also is a concern that insects may burrow into the foam. According to the Structural Insulated Panel Association (SIPA), termites won't feed on the foam core but they may nest there. As a result, manufacturers offer borate-treated panels

The combined thermal mass and insulation of these fiber-cement blocks (below and far right) can offer high performance in building efficiency.



Courtesy www.faswall.com



Autoclaved aerated concrete (AAC) blocks replace the wood, insulation, house wrap, and drywall in a conventionally constructed home.

Courtesy www.safecrete.com



Courtesy www.durisolbuild.com

and the SIPA suggests termites can also be discouraged by a steel mesh barrier placed around the perimeter of the house and at foundation penetrations.

Rigid foam insulation is a vital component of structural insulated panels, and some people wonder whether using a petroleum-based product like that can really be green. The amount of oil used to make insulating foam (which is primarily air) is very small. Compared to the energy used in a home over its lifetime, the small amount of petroleum used in its construction is miniscule. If formaldehyde is a concern, ask the SIPs supplier whether the skins can be made from formaldehyde-free OSB.

Alternatives to Wood

Autoclaved aerated concrete (AAC) blocks take the place of a number of components used in standard stick-frame construction, replacing wood, insulation, house wrap, and drywall. The result is a house that's fireproof, mold-proof, insect-resistant, hypoallergenic, sound-absorptive, and engineered to withstand hurricanes and earthquakes.

Aluminum powder added to a mix of sand, lime, water, and cement creates a five-fold increase in volume while trapping insulating air bubbles. It's hardened in a mold and then processed in an autoclave to produce blocks in a variety of configurations. Blocks can be cut on-site with a specialized hand saw or band saw and laid up somewhat like conventional concrete block.

Walls made with AAC block have far less air infiltration than conventional 2-by-4 construction, with insulating values for the 8-inch-thick block as high as R-21.

RETHINKING STEEL

Do steel framing members have a place in green construction? On the plus side, they can be made with recycled material, a central tenet of sustainable building. But steel has high embodied energy and is a very effective conductor of heat—just think of the handle of a cast-iron frying pan that's been on the stove for a while.

When steel framing is used to build exterior walls, all of the sheathing, windows, and door frames have to be fastened with screws. Inside, drywall is also attached to the framing with screws. Those thousands of fasteners increase thermal bridging that substantially circumvents insulation used in wall cavities and conducts heat in or out of the house depending on the season.

The Oak Ridge National Laboratory found that steel framing reduces the effectiveness of cavity insulation by 50% compared to its wood-framed counterpart. In 2-by-6 steel-framed construction, the cavity insulation of fiberglass batts nominally rated at R-19 provides an insulating value of only R-10. The only way around this is to attach a layer of rigid foam insulation to the outside of the building. Adding 2 inches of rigid foam insulation boosts the overall rating to R-20. But that's about what you get with 2-by-6 wood framing on 24-inch centers. The only advantage is that the rigid foam insulation blocks a potential thermal bridge that also affects wood framing, though less dramatically. But this incremental improvement in performance adds substantially to the cost of the wall and the labor required to build it.



Light-gauge steel framing is lighter and straighter than studs sawn from solid lumber. But when used on outside walls it creates thermal bridging and lower energy efficiency unless the wall is wrapped in rigid insulation.

shipping. But they typically offer higher energy efficiency than a conventionally built wood-framed structure by reducing air infiltration and increasing thermal mass and insulation.

Best Building Practices

Building better doesn't have to be difficult. Here are some tips to keep in mind:

- Use less lumber to perform the same function by adopting advanced framing techniques.
- Use engineered lumber in place of large-dimension sawn lumber.
- Demand FSC-certified lumber from your supplier.
- Use reclaimed lumber if it's available.
- Frame for the highest practical levels of insulation: The house should exceed energy standards by 50%.
- Avoid steel framing on exterior walls unless steps are taken to prevent thermal bridging. Completely avoid steel framing on exterior walls in areas of severe cold.
- Consider building with SIPs or an alternative product such as AAC to eliminate wall cavities, air infiltration, and mold risk.

Access

David Johnston's (david@greenbuilding.com) work in green building has been embraced by homeowners, building professionals, and sustainability advocates around the world. In 2007, he was named International Sustainability Pioneer by the European business community. Johnston's previous book, *Green Remodeling*, is a recognized guide to green remodeling.

Scott Gibson (scottgibson@securespeed.us) is a contributing editor to *Fine Homebuilding* magazine, and a freelance writer and editor.

This article was adapted from *Green from the Ground Up* (The Taunton Press, 2008).

Insulated concrete forms include Rastra, which is made mostly of recycled polystyrene with some cement to form a material the company calls "Thastyron." It's made into hollow-core blocks that are relatively lightweight, can be cut with ordinary handsaws, and glued into place. Once stacked into walls, the blocks are reinforced with steel and filled with concrete. The company reports that 10-inch-thick walls have an R-value of 36.

Fiber-cement blocks, such as Durisol or Faswall, are another option. These hollow-core blocks are made from mineralized wood shavings and Portland cement, stacked, and then filled with reinforcing steel and concrete. Manufacturers claim that the material is noncombustible, sound-absorptive, dimensionally stable, and boasts a 78% recycled content.

Products like these share many green benefits and give builders interested in exploring new avenues considerable leeway. They are not as widely available as wood building products and may make the most sense in areas with local or regional suppliers. One more consideration: There is a learning curve in working with new materials, but converts will tell you it's well worth it. These products may have a higher embodied energy than wood framing, due to their use of concrete and other manufactured materials, as well as



A new era has arrived in the solar industry



Productive. Reliable. Smart.

- Over 6 million hours of uninterrupted operation
- 15-year standard limited warranty
- 100% uptime guarantee

"We've moved all our installations to the Enphase Micro-inverter System. Our customers love it - residential and commercial, small and large."

- Steve Godmere, Hawaii Energy Connection, LLC



Empowered RENOVATION

by Laura S. Richardson
photos by Gil & Laura Richardson

In mid-2007, my husband Gil and I decided to try our hand at “house flipping.” We purchased a run-down, 108-year-old home desperately in need of renovation in Woodsville, New Hampshire—about 20 minutes from our off-grid, solar-powered home in the White Mountains. Unlike that of traditional flippers, our motivation was not windfall profits but rather a different kind of green: to demonstrate the value in making older homes more sustainable and energy efficient—while inspiring others to do the same.



Before and after the green remodel: The sun porch, with its numerous south-facing windows, provides some passive solar heating for the house and a building-integrated photovoltaic system offsets a portion of the home's electricity use.



Flipping is not for the faint-hearted. It takes a lot of effort—and capital investment risk—so doing some of the work yourself is the best way to save a few bucks and stay within budget. However, the flipping model we developed was not just about making some pretty upgrades and getting out fast. Gil and I wanted to do this project right, making it an energy-efficient, environmental showcase.

While this was our first renovation, we had some construction experience from building our small log cabin in 1997 (now our office). Plus, we designed and oversaw the construction of our superinsulated, off-grid home in 2001. But neither of us had all the skills to tackle this project single-handedly, so we recruited our friend Jean-Paul Downes, an experienced carpenter, to help with hands-on work. What Gil and I had to offer was our knowledge about energy efficiency, green building, and whole-systems thinking. Being dedicated energy misers, we had heard criticism that “normal” people couldn’t live happily, comfortably, and inexpensively while using a lot less energy (and money). This project was in direct answer to that complaint.



The asbestos siding was professionally removed, exposing another hazard underneath—lead paint-encrusted clapboard. A layer of closed-cell foam was sprayed over the old siding, encapsulating the paint and improving the home’s insulation.

Finding the Property

Woodsville epitomizes New Hampshire’s image: an unpretentious, walkable, small town, with turn-of-the-century architecture. The state’s “Live Free or Die” motto is evident here—no zoning ordinances, minimal building inspection, and a population (about 1,100) that prefers to mind its own business. All of this made it easier to execute our plan without too much paperwork or fuss.

Though Woodsville is far from progressive and hardly flourishing economically, we hoped to jump-start a green economy. More importantly, we hoped to demonstrate the benefits and feasibility of energy efficiency to the town’s many working-class families that pay a lot to heat and power their older, inefficient homes.

Walkability is an important, and often overlooked, aspect of a sustainable lifestyle. The corner-lot New Englander that we found is only one block from the grocery store, elementary school, hardware store, and pharmacy, and an easy stroll to restaurants and other shops. Plus, a big-box department store is only three blocks away.

Though turning a profit was not a top priority, we certainly didn’t set out to lose a lot of money in the process. As newcomers, we expected to exceed our budget, but we hoped to learn from this project so that future projects would turn a profit. Given the state of the house and the family-

oriented neighborhood, the house was priced appropriately for its condition and fit into our price range.

As for the condition of the house, let’s not sugarcoat it—the place was a wreck. Though the foundation and bones were solid, 108 years of hard living and homeowner renovations had taken its toll. Most people winced as they drove by the house and its unkempt yard—but not us. Seduced by the south-facing roof, the big sun porch for passive solar heating, the tin ceiling in the dining room, and other interesting architectural details, we convinced ourselves that the project was manageable.

Under Construction

We paid a lot of attention to the building envelope, working hard to ventilate where appropriate and seal up everything else. From day one, we made sure that our subcontractors knew to seal any holes they made. We liked to tell them, “You own the hole.”

We started working on the project in earnest in October 2007 by having the exterior asbestos siding professionally removed, thus exposing the lead paint-encrusted original clapboard. All the windows were extricated and replaced. Then we screwed on furring strips (2 by 4s ripped in

To mitigate moisture problems, the basement crawl space floor was covered with a 6-mil poly vapor barrier. Walls were coated with spray foam insulation.



half) 16 inches on-center, and offset from the original wall studs to avoid thermal bridging. We had closed-cell spray foam applied into those bays. In addition to encapsulating the lead paint, the foam created an air barrier and an insulation of R-10 for the house's exterior walls. For several months, until we finished the siding, we "showed off" the insulation to the community. As autumn faded, we started installing a durable fiber-cement clapboard siding.

The next step was to reveal the interior wall structure to see what we were dealing with. Armed with respirator masks and eye protection, we gutted the half of the house that was in need of structural repairs—everything from the walls and ceilings to the bathroom fixtures and kitchen cabinets.

Layer upon layer of scabbed-on wall/ceiling/floor materials masked problems from earlier "renovations" and a plethora of treasures—including bees in the basement and ossified evidence of former canine residents. In the wall cavities, we discovered empty bottles originally holding cider and hard liquor, but barely any insulation—just a hodgepodge of rock wool, fiberglass, blown-in cellulose, and even crumpled newspaper in some sections.

After gutting half the house, we realized that there were two unique sections—one poorly insulated with fiberglass and other miscellany, the other completely without insulation. The somewhat-insulated section we gutted to the studs and reinsulated with closed-cell spray foam.

Not surprisingly, the oldest section of the house—the dining room, living room, formal entry, study, and the upstairs bedrooms—had no insulation behind the plaster-lath walls. Holes were drilled into the walls and open-cell spray foam was injected into the voids, creating an R-14 wall cavity. While the R-value of open-cell foam is less than closed-cell foam, we



The basement gets a new face: The original brick walls were coated with waterproofing paint. Frame walls were built and insulated with closed-cell foam insulation.



Spray Foam Insulation Comparison

Closed-Cell	Open-Cell
Highest insulating value per inch (>R-6)	Good insulation value per inch (R-3.5)
Low vapor permeability	Higher vapor permeability, but controlled
Air barrier	Air barrier at full wall thickness
Increases wall strength	Lower strength & rigidity
Resists water	Controlled moisture permeability
Medium density (1.75–2.25 lbs./ft. ³)	Low density (0.4–1.2 lbs./ft. ³)
Absorbs some sound, especially bass tones	Twice the sound absorption in normal noise frequency ranges
More expensive	Less expensive

Source: www.fomo.com

applauded ourselves for avoiding gutting that oldest section of the house, thus saving the existing plaster-lath walls. However, that plan proved somewhat counterproductive—pressure from the open-cell foam blew out a few of the weak spots and contorted a wall in places, which meant more work later to make those areas presentable. But the end result of this effort and the furred-out exterior was insulation values between R-21 and R-32 in the exterior walls throughout the house.

In the attic crawl spaces, Gil sealed all penetrations around the electrical boxes, plumbing, ductwork, light fixtures, and smoke detectors with polyurethane foam sealant. He ran a thick string from those buried items under the cellulose to the roof rafters and labeled them, making them easier to locate in the future. He also quadrupled the gable ventilation. We then blew in cellulose insulation, which boosted the R-value to more than 50.

In the usable basement area, we coated the brick foundation walls with waterproofing paint, and built a stud wall an inch out from them. We didn't want the studs to touch the brick foundation and act as a thermal bridge or absorb any moisture through capillary action. We sprayed closed-cell foam between and behind the studs, from 18 inches below grade (approximately the depth of the frost in our area) up to the top of the rim joists. All this effectively converted the once cold, creepy dungeon into a warmer and drier space. In the unusable basement crawl space area, Gil laid a 6-mil, poly vapor barrier over the dirt floor. This area also got a coating of spray foam on the walls, from the poly-covered floor to the top of the rim joists, creating a complete moisture barrier. This prevents moisture from entering the building and immediately reduced the musty smell.

New double-pane windows—fiberglass-clad to avoid expansion and contraction—finished off the envelope. The new windows are argon-filled with a low-emissivity (low-e) coating and a U-factor of 0.32, making the home more comfortable by reflecting the sun's heat in the summer while keeping more warmth inside the house in winter.

Upgrading the Systems

While the walls were open for insulating, we addressed heating, electrical, plumbing, and air-quality issues. The heating system was on its last leg, and the electrical wiring—with exposed, live wires in some places—was downright

dangerous. The plumbing was corroded and failing, and we needed to mechanically exchange the air since the building was now quite airtight.

The heating system, a 40-plus-year-old oil-fired boiler that served the hydronic baseboard heaters throughout the house, was replaced with a Buderus GB142 propane-fired condensing boiler—a small unit that operates at 95% efficiency, according to its Energy Star tag. The boiler is equipped with an outdoor temperature setback sensor that determines how hot to make the water and six zones to optimize the baseboard heating. Our plumber replaced all of the old, battered baseboard radiators.

Next, our electricians brought everything up to code, pulling out knob-and-tube wiring and wooden conduit and upgrading the whole system, including hard-wired smoke detectors. Fragile and inefficient lighting was replaced with attractive, low-energy compact-fluorescent fixtures throughout.

Then came the plumbing. An old two-holer buried under the kitchen floor was a good indicator of what we were dealing with. A sign in the driveway reading “free” offered passers-by a lot of the still-functional but old and out-of-date accoutrements from the house. The battered kitchen sink was gone within an hour. Our plumber pulled out and sold the corroded copper piping and replumbed with PEX tubing.

Prior to insulating, this house had plenty of fresh air exchange, with expensively heated air escaping to the outside. The foam insulation helped stop air leakage, but also made the building tight. So while the wall cavities were still accessible, we installed a RenewAire energy recovery ventilator (ERV) to

Other Green Renovations

- Low VOC paints & sealants used throughout
- Wellborn formaldehyde-free cabinets
- American Clay finish on dining room walls
- Marmoleum (natural linoleum) on kitchen, bathroom & laundry room floors



Above: The energy recovery ventilator brings fresh air into the home with minimal heat loss.

Right: The plumber installs the new boiler that will feed the new hydronic baseboard heaters.



mechanically exchange the air in the house, transferring the heat from the outgoing air to the incoming air. Following the sizing guide from the manufacturer, Gil set the number of air exchanges per hour by the volume (cubic feet) of the home and the number of expected occupants.

We also sealed the ERV's rigid metal ductwork with a mastic sealant—a requirement of New Hampshire's energy code for new construction.

Going for Solar

Once we realized that there were four layers of asphalt shingles on the roof—two layers being the maximum allowed by the building code—we knew we had to remove all of

the shingles before doing anything else. The nails used on the most recent layer didn't even penetrate the sheathing, creating some safety and weight issues. One dumpster was called in, then a second. The shingles were replaced with a new standing-seam roof by McElroy Metals made of 97% recycled steel and guaranteed for 50 years. Its pale green paint has a heat-reflective pigment to keep the roof (and attic) cooler.

From the start, we wanted to add both a solar-electric and a solar hot water system. But as each project took longer and costs mounted, we realized that we'd need to make some concessions. Instead of adding a solar hot water system, we compromised and set up the plumbing for the system by



Energy-efficient appliances, formaldehyde-free cabinets, a natural linoleum floor, and an additional south-facing window round out the kitchen improvements.





Clockwise from top: “Peel-and-stick” PV laminates are carefully applied on the new steel roofing pans. Installing the pans, just like any other steel roof. Modules are connected via wiring at the roof peak, which is covered with a ridge cap.

running copper pipes, electrical conduit, and electrical wire through interior walls from the appropriate roof section to the basement. It probably cost us less than \$250 to do all that and will save a future homeowner thousands of dollars—and a lot of frustration.

When it came to solar-electric ambitions, we managed to make a big statement with a relatively small system. A grid-tied, batteryless 950-watt photovoltaic system—14 Uni-Solar PVL68 modules paired with a Sunny Boy inverter—made this home the first net-metered one in town. The “peel-and-stick” laminates allowed our PV installer—KW Management Inc.—to “roll out” and glue down the PV array without having to penetrate the roof.

Besides the minimal visual impact of this array compared to the rigid PV modules that must be attached to a racking system, another benefit of using the thin-film technology is that it performs better in diffused sunlight. Woodsville sits at the junction of three rivers, and the mornings are typically foggy, but even on cloudy days, the system makes some energy. The primary drawback to this amorphous silicon thin-film technology is that it takes about twice the surface area to produce the same amount of power as a standard crystalline PV array, so available roof space limits the PV array size.

Woodsville, serviced by its own municipal utility, Woodsville Water & Light, is not required to participate in the 1:1 net metering and other efficiency programs run by the larger utilities and overseen by the New Hampshire Public Utilities Commission. Having worked with the New Hampshire Sustainable Energy Association to improve legislative policy, I was well-versed in net metering and seized the opportunity to meet with town utility commissioners at one of their monthly public meetings. During a 15-minute casual presentation, I explained how net metering works and how it would be good for Woodsville—feeding electricity into the grid during peak-load periods when energy is typically more expensive, reducing wear-and-tear on their fragile transformers and feeding “free” energy into neighboring homes.

Low Energy, High Efficiency

The house’s solar orientation and the spacious enclosed porch on the home’s south face hinted that, even in 1900, builders understood the concepts of passive heat gain. The porch is a free-heat machine: Once it warms, we open the interior windows on the adjoining wall and gain free heat until mid-afternoon.

To further improve the home’s passive-solar performance and daylighting, we added a south-facing window in the kitchen. The west side of house gets a lot of late afternoon sun, warming up the core of the house without cost. We removed a large, north-facing window to reduce heat loss.

An Energy Star dishwasher and refrigerator, compact fluorescent lighting, and switched outlets round out the energy-saving features. Dual-flush toilets and low-flow faucets will keep water usage low.

Renovation Costs

Item	Cost
Purchase & related costs	\$114,747
Subcontracted carpentry & labor	63,755
Plumbing	27,725
Misc. building materials	24,747
Roofing	14,134
Interest on loan	11,289
Spray foam insulation	9,734
Asbestos & lead-paint remediation	8,375
Electric	8,345
PV system	7,814
Cabinets	7,388
Windows	6,429
Siding	4,310
Masonry	3,200
Flooring	3,048
Fuel hookups, installation, fuel & related labor	2,619
Rubbish removal	2,280
Paint	2,129
Appliances	2,077
Portable toilet rental	725
Woodsville Water & Light utilities	655
Energy-efficient products	390
Total	\$325,915

Once we got the town's utility on board, the installation was fairly straightforward. The system fit nicely on a south-facing section of the new roof. It took only one day for our installer and roofer to adhere the PV laminates and install the roof pans, run the wiring and conduit, and install the inverter and disconnect. With little fanfare, the lineman from WW&L hooked up the new digital meter. By mid-afternoon, the system was producing pollution-free electricity.

Even though, at 950 W, the PV system is more a symbol than an big energy contributor, it produces 3 to 5 kWh a day, and helps make a connection between household energy consumed and energy generated.

Finished Flipping

From start to finish, the renovations took about nine months of focused effort falling only a few weeks behind schedule—but substantially over budget. All in all, the result was pretty much what we expected. Not bad for first-time flippers.

The finished product: A like-new house with all the old-time charm but none of the dirt, drafts, or danger. Though we decided not to formally pursue Energy Star or Leadership in Energy and Environmental Design (LEED) certification because of the expense, the time involved, and the logistical problems of certification in a remote town, we maintained high standards—meeting the requirements of both programs

Headway in New Hampshire

In 2008, Governor John Lynch signed HB1628 into law, giving a one-time incentive payment to residential RE-electric projects. Under the new law, photovoltaic, wind, and microhydro systems will qualify for \$3 per watt or 50% of system costs, whichever is less, with a payment cap of \$6,000. To qualify, systems must be operational after July 1, 2008, less than 5 kW in size, and located on the owner's property. The Public Utilities Commission is expected to begin distributing payments in July 2009 on a first-come, first-served basis. The fund is established by payments from utilities as an alternative to meeting the state's renewable energy portfolio laws.

and surpassing New Hampshire energy code for insulation and air quality.

Thanks to the local buzz and advertising, more than 100 people turned out for the open house. They came to look at the systems and the renovation. They came to get ideas for their own projects, or simply to dream about living in a healthy and low-energy home. Unfortunately, none came prepared to write us a check for the down payment.

In fact, the timing for our first "flip" couldn't have been worse. The house went on the market at the onset of the housing-and-lending fiasco that's taken such a toll on the national economy. Under better circumstances, the renovated house would move fast. Instead of reducing the price, we've decided to rent the house until the economic situation turns.

But we have no regrets. We learned a lot from the experience, and more importantly, we educated others in the process. Not only did people in town marvel at the metamorphosis, our crew walked away with an appreciation for green building. Our carpenter, who came to the project with no green-building experience, is currently building a straw-bale house, and the local hardware stores, who were originally baffled by our numerous "special" requests, are now stocking some of the products we sought.

Access

Laura S. Richardson (laurarichardson@wildblue.net) is the project director for StayWarmNH (www.staywarmnh.org). She and her husband Gil own Empowered Homes LLC and Empowered Answers LLC (www.empoweredanswers.com), and cofounded the New Hampshire Sustainable Energy Association (www.nhsea.org). She, Gil, and their two kittens live off-grid in a PV-powered, wood-heated home in New Hampshire's White Mountains.

KW Management Inc. • www.kwmanagement.com • PV system installer





How Far Off The Grid Are You?

No matter where you are, depend on Deka Solar.

Now deployed on all seven continents, Deka Solar Gel/AGM or Flooded batteries are the proven choice for all your renewable energy applications. Deka Solar Batteries, sold worldwide through major photovoltaic equipment manufacturers and distributors, exceed the high standards of the solar industry with superior quality and environmentally conscious battery solutions. Available from MK Battery Distribution centers across North America, Europe and the Asia Pacific region.

PROVEN PRODUCTS IN DEMANDING PHOTOVOLTAIC APPLICATIONS
U.L. RECOGNIZED COMPONENTS • COMPETITIVE WARRANTY • QUALITY SYSTEM CERTIFIED TO ISO9001 • MADE IN THE U.S.A.



MK Battery • 800-372-9253 • www.mkbattery.com
A subsidiary of East Penn Manufacturing Co., Inc.

QUALITY SYSTEM
CERTIFIED TO
ISO 9001
ISO/TS 16949
ISO 14001



Pitched Roof Mounting

by Rebekah Hren



One of the many beautiful things about photovoltaic technology is the ability to transform underutilized space—the residential roof—into a clean, renewable, local power production plant. Today's roof-mounting systems can make installations faster and more streamlined than before.

Courtesy www.ironridge.com


Whether because of limited ground space, better solar access with less shading from structures and trees, or lower installed cost, roofs are the default location for residential solar-electric systems. While the vagaries of residential construction lead to roofs of myriad shapes and sizes, most roofs are designed with a pitch (slope). For the PV system and installer, the pitch is important for ease of installation and for system efficiency, since modules produce greater power the more perpendicular they are to the sun's rays.

Manufacturers' mounting systems for pitched roofs tend to follow a top-down rail mounting scheme. Aluminum or stainless steel L-feet or standoff posts, usually lag-bolted into a rafter, support an aluminum rail at regular intervals. Two rails run under each row of PV modules, and the modules are secured to the rail by means of top-mounted clips. These are bolted down to the rail between modules, with one clip connecting the sides of two adjacent modules.


Parts & Pieces: Feet

Mount feet come in many varieties, and this is one of the places where great innovation has been happening in the industry. Examples include Quick Mount PV's Composition Mount, Thompson Technology's Flat Jack, and Direct Power & Water's

Typical Top-Down PV Mount

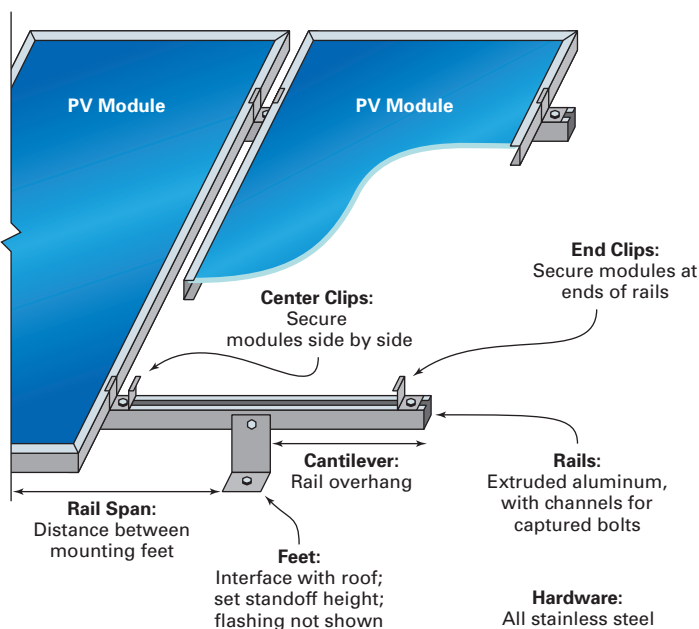

Courtesy www.ironridge.com

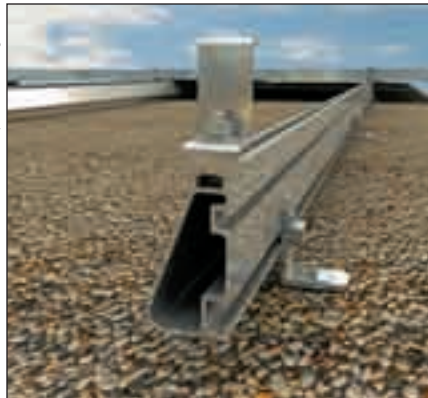

Courtesy www.unirac.com



Courtesy www.conergy.us



Almost all residential PV racks are “top-down,” meaning modules are easily installed from above. Typical examples (from L to R): IronRidge, Unirac, and Conergy. All show foot, rail, and clip.

(DP&W) Easy Feet. The mount you choose to hold your rail depends on a few factors: roof type, climate characteristics, price, and personal preference.

L-feet are lag-screwed to rafters through the existing roofing layers and depend solely on sealant to remain watertight during the life of the roof. PV mounting manufacturers don’t recommend a brand of sealant, but refer you to roofing manufacturers. While they are the fastest, least-expensive footing option, L-foot installations may void roof warranties when not flashed (see “Protecting the Roof with Flashing” sidebar). Some types of sealant are designed to work only with certain roofing materials—and will not work properly with others. Leaking mount feet may cause damage to the underlying roof structure, which could lead to mold problems and, in some cases, litigation. When in doubt, consult a professional roofer.

Direct Power & Water’s Easy Feet are designed to hold to roof sheathing when rafters aren’t available.

Courtesy www.directpower.com



Courtesy www.directpower.com



Protecting the Roof with Flashing

Flashing is commonly used around plumbing vents, chimneys, and other roofing joints to keep water from entering and damaging the roof structure. In PV installations, it's also used around roofing penetrations.

On composition roofs, a thin, rectangular piece of metal is typically used. One half is pushed up under a shingle, while the other half overlaps the shingle in the row beneath. For mounting standoffs, the metal sheet has a plastic collar, which fits tightly around the standoff, preventing water entry. Oatey is a manufacturer of flashings commonly used with various PV mounts.

Flashing metal roofs poses more challenges, as the roof metal must be uninstalled, cut, and then refit to allow for an overlap around the hole where the square of flashing can be inserted. Metal roofing specialists do offer flashings that don't require an overlap but instead use sealant to secure the flashing to the metal roof. In these cases, watertightness relies solely on sealant for the life of the system.



Courtesy www.directpower.com

Oatey flashings provide a watertight seal for the mounting post.

With the exception of only a few products on the market, rail supports attach to rafters with stainless-steel lag screws. The screws must be sized based on uplift point loads and wood strength charts like those provided by the American Wood Council (see Access). Racking manufacturers should provide engineering recommendations. Exceptions to lagging into a rafter include the Easy Feet and SunPower's Smart Mount. Easy Feet come with butyl mastic backing and are held down with five screws, which are secured through the roofing material into the decking or sheathing. These are

good options in cases where the rafters are inaccessible (as with standing-seam metal roofs, when rafters are inaccessibly located under a V), or when retrofitting a structural insulated panel (SIP) roof, which has no rafters. Note that Easy Feet depend on structurally sound roof decking and should not be used on roofs with compromised decking.

Parts & Pieces: Rails


Nearly every rail on the market is made of extruded aluminum. In the extrusion process, hot aluminum is pushed through a

Thompson Technology's Flat Jack mounting foot uses integrated flashing that slides up under shingles.




Courtesy www.thompsonetec.com

Quick Mount PV's Composition Mount is also self-flashed. Shown (below) on a cedar shake roof.



Courtesy www.quickmountpv.com

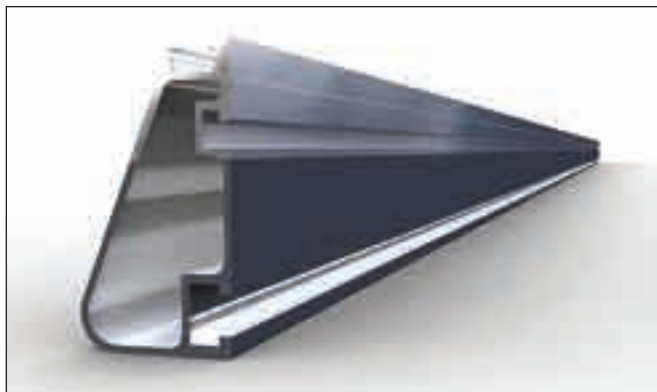

Courtesy www.ironridge.com

Extruded aluminum rail is the backbone of a PV mount.

die to create the desired profile. Many manufacturers use anodizing, which creates a hard, nonreactive surface film to improve corrosion- and wear-resistance. Generally, an anodized rail retains its silver color, though other anodized rail colors (such as bronze for SunEarth's CompRail system) may be available. The other commonly available rail color is black, which usually means a protective powder coating has been applied. Powder coating is a dry coating that's cured under heat to form a "skin." It can create a hard finish tougher than conventional paint.

Some manufacturers sell both light and heavy rail. Heavy rail is thicker and stronger, and can span longer distances between supports and carry heavier loads. Light rail is considered adequate for the majority of residential pitched roofs. Rail can typically be ordered in lengths up to 27 feet, and splice kits are used to tie lengths together. Rail can run horizontally or vertically on a roof.

Spacing of rail supports, referred to as "rail span" or "foot spacing," depends upon rafter spacing (commonly 16 or 24 inches on center), manufacturer's recommendations, and loading estimates, such as dead load, wind load, and snow load (see "Dealing with the Forces of Nature," at right). Each manufacturer has its own recommendations for maximum recommended rail span wind speeds—some to 90 mph, some to 125 mph. Typically, rail span will vary between 48 and 96 inches when using light rail.

Dealing with the Forces of Nature

Loads from wind, snow, and the combined weight of the system components impact rail span and spacing and rail gauge, as well as roof design limits. If the mounting system isn't sized accordingly, strong winds can put additional uplift strain on your modules and mounts, causing damage to the system and roof structure. Similarly, the additional weight of snow on top of the modules can compromise a roof's integrity. If you're retrofitting a system to an existing roof, you'll need to consult with an engineer to make sure your roof is beefy enough to withstand the added array weight (the roof's "dead" load) and wind load. Similarly, if you're building a new house, you'll need to design the roof accordingly to accept the increased loads of the system.

Wind load (uplift and downlift pressure). Three factors are used to find down-force and uplift from wind pressure:

- Basic wind speed—found by consulting local wind maps or building code officials
- Effective wind area—the total continuous area of modules
- Roof zone—which section of a roof is utilized, whether interior, end, or corner.

These factors come together in an engineering formula or table that specifies down-force and uplift pressure in pounds per square foot according to the input factors. This pressure will then need to be adjusted for other factors, including topography (whether the building is in an urban area or windswept plain), height exposure category (based on building height), and importance factor (such as whether the building is a residence or hospital, for instance, and whether the building is in a hurricane region).

Snow load is the weight of the heaviest snow likely to occur in an area, calculated in pounds per square foot. Data is typically available from local building officials and code books.

Dead load is the additive weight of modules, and rail and racking components, calculated in pounds per square foot.

No Penetrations, No Problem

Metal Roof Innovations Ltd.'s S5! clamps don't require any roof penetrations, nor do they penetrate the seam of the roof, but clamp on by means of stainless steel setscrews. The clamps can be mounted from the side of the seam or from the top, and are available with various set-screw hole configurations and clamp profiles to suit variations in standing seams. Depending on the thickness of the metal, tightening specs vary for the setscrews: 115 inch-pounds (for 24-gauge metals) or 150 inch-pounds (for 22-gauge steel). Some S5! installations don't need rail, as the module frames are supported by the top platform of the S5! clamps, and mid- and/or end-clips are bolted directly to the clamp. Other installations use the S5! clamps to mount standard rails.

S5! clamps are made for various standing-seam metal roofing, and can be used to mount rails or PV modules directly, as shown.



Courtesy www.s-5.com

Another facet of rail span is the cantilever or rail overhang—the distance between the rail end and the first support. Manufacturer's instructions will vary: For example, Unirac recommends no more than 25% of module width as an acceptable overhang. DP&W's Power Rail allows an overhang of 32 inches for 125 mph wind load and 36 inches for 90 mph wind load. Of course, the spans and cantilever can be greater for heavy rail. Be sure to follow manufacturer's recommendations.

Parts & Pieces: Clips & Bolts

Clips secure the modules to the rail. Two types of clips are used in top-down mounting: **mid-clips**, which fit between modules, and **end-clips**, for the outside edge of the end modules. Clips are either aluminum or stainless steel, and may be powder-coated or anodized. Because modules come in a variety of thicknesses, the clip height must match the module frame height.

Clips are attached to rails with stainless steel bolts and nuts. There are a few basic styles, some with bolt heads that are secured (captive) within the rail. One, such as DP&W offers, uses an oval head bolt that must be slid into position from one end of the rail. (Watch out for rail splices, which can stop your bolt!) Another, such as used with Unirac's SolarMount, uses a T-head bolt, which can be placed in the rail at the appropriate spot, and then twisted to grip the inside of the rail. Care must be taken to make sure it engages properly. There are other approaches as well, such as Conergy's mounting system, which uses specialized nuts ("Quickstones") that can be slid down the channel and into position.


A few systems (such as SunEarth's CompRail and Unirac's SunFrame) forego mid- and end-clips. Instead, two rows of modules share a single, central rail between them. The modules sit on a shelf on either side of the rail, then are secured with a cap that bolts into the rail.

SunEarth's CompRail uses full-length channels instead of clips.



Courtesy www.sunearthinc.com (2)

Though styles vary, almost all top-down systems feature stainless-steel captured bolts or nuts, and module clips.

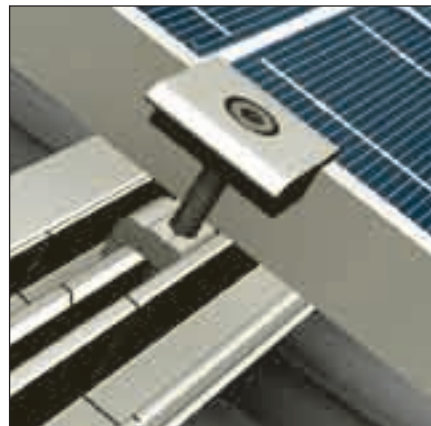

Courtesy www.conergy.us

Beyond Composition Roofs

PV mounts for tile or wood shakes are available from Quick Mount PV and Professional Solar Products. Quick Mount PV's mounts for curved or flat tile replace the tile itself, integrating the tile-shaped flashing and aluminum standoff into one bolt-together unit. The mount is attached to the decking with four 1/4-inch-diameter lag screws. Professional Solar Products's Tile Trac takes a different approach by drilling, bolting, and sealing through the crown of the existing tile to the decking. The Tile Trac system lag-screws a metal track into the rafter, with a long bolt or standoff running up and through the crown of the sealed tile to hold the rail.

For installations on new seamless metal roofs, flashed standoffs can be used. However, retrofitting standoffs onto an existing roof is more challenging. On these roofs, securing a lag screw for an L-foot into a rafter can be difficult or impossible, as a raised metal V often lands over the rafter line and should not be squashed down by a mount. There are two possible solutions: adding spacers or sisters between the rafters to screw into or using a mount, such as DP&W's Easy Feet, screwed into the existing sheathing. Spacers are boards in an attic nailed between and perpendicular to two rafters, and held tightly against the roof decking's underside to provide a secure attachment point from above the roof. A sistered board is nailed against a rafter to extend the rafter's width.

The rare metal shingle roof or raised profile (shingle-appearance) metal roof should be approached with caution. Regular flashing might work with some smaller metal shingles, but others are in large sheets that resist attempts at flashing. L-feet won't usually work with this type of metal roof either, as the profile will get crimped. The best solutions are to mount standoffs and flashing during initial roofing or, for a retrofit, to remove the metal and reinstall after standoffs are placed.

Other Considerations

Adjustable Array Angle. Using adjustable legs beneath the rail to optimize the tilt of a roof-mounted array is becoming less common, since the production gained is moderate (usually 1% to 5% for fixed-tilt arrays), and most homeowners

don't want to climb on the roof to make adjustments. Tilting an array can create a number of difficulties, including more complex wind loading, more hardware needed, more difficult installation, and a perceived lack of aesthetics. Using the National Renewable Energy Laboratory's PVWatts calculator (see Access) to model power production at different tilt angles can be a useful cost-benefit analysis tool (see "PV Performance at Different Pitches," below).

What is easily configurable in flush-mounted roof arrays on rails is the height of the modules above the roof. L-feet and standoffs can be purchased in varying heights. The taller the standoffs, the more airflow beneath the modules, which results in cooler modules and more power output. On the minus side, the farther an array is from the roof, the more it will stand out.

Grounding. Rail and modules must be grounded using UL- or ETL-listed equipment. Wiley Electronics' WEEB (washer, electrical equipment bond) and Unirac's grounding clips are listed to meet UL Standard 467. These clips lay in the rail between module corners, and are faster and less expensive to install than the old standby: the IlSCO lay-in lug. The IlSCO lug is made of tin-plated solid copper, with a stainless steel screw to hold the wire. It screws into the dedicated ground spot on the module frame, and requires a solid copper wire run from lug to lug. (For more on grounding, see *Code Corner* in HP128 and *Independent Power Providers* in HP121.)

Quick Mount PV's Tile Mount is sized to replace an existing roof tile.



Courtesy www.quickmountpv.com

Pitched Roof Performance

Along with the growth in the solar industry have come many advances in PV installation methods. Manufacturers and engineers are trailblazing options that make installations more durable, dependable, and cost-effective. To uphold our part of the bargain as end users, we must install components correctly, and use them only for the jobs they are meant to do. Being part of a vibrant, burgeoning industry means taking responsibility to continually learn on the job and being flexible enough to adapt to improvements in methods when they come our way.

PV Performance at Different Pitches

How much impact does tilt have on a fixed grid-tied array? In Raleigh, North Carolina, on a roof with slope of 25° (a roof pitch between 5:12 and 6:12), a flush-mounted 3 kW array will produce about 3,916 kWh per year. The same size array tilted close to latitude (in this case, 35.9°) would produce about 3,937 kWh per year—a production difference of 21 kWh. Of course, if the array tilt was adjusted throughout the year, the production numbers would increase.

For example, a monthly adjustment to each month's optimum angle would result in 4,139 kWh per year. A quarterly adjustment to optimum tilt would result in 4,127 kWh per year, a 4.8% increase over the fixed-tilt array. Generally, only off-gridders who need to squeeze every winter watt-hour out of their systems are willing to go to these lengths, which can add up to 10% to their system's winter production.

Month	Array Tilt = 35.9° (Latitude)			Array Tilt = 25.0° (Roof Pitch)		
	Avg. Solar Radiation (kWh/m ² /Day)	AC Energy (kWh)	Value (\$)	Avg. Solar Radiation (kWh/m ² /Day)	AC Energy (kWh)	Value (\$)
January	3.73	265	\$22.53	3.43	243	\$20.66
February	4.66	298	25.33	4.40	281	23.89
March	5.38	368	31.28	5.28	362	30.77
April	5.77	372	31.62	5.89	381	32.38
May	5.55	357	30.34	5.83	376	31.96
June	5.77	354	30.09	6.15	378	32.13
July	5.54	352	29.92	5.86	373	31.71
August	5.58	353	30.00	5.77	365	31.03
September	5.35	333	28.30	5.34	333	28.30
October	5.33	354	30.09	5.07	338	28.73
November	4.34	287	24.39	4.01	265	22.53
December	3.51	245	20.82	3.19	222	18.87
Annual Total	5.04	3,937	\$334.64	5.02	3,916	\$332.86

Source: PVWatts for Raleigh, NC, 3 kW array (www.nrel.gov/rredc/pvwatts/)

Pitched Roof Mount Checklist

- ☐ Inspect roof and, if necessary, replace it prior to installation
- ☐ Use stainless steel and/or aluminum hardware (rails, supports, clips, etc.)
- ☐ Use flashing and/or appropriate sealing for every roof penetration
- ☐ If necessary, reinforce roof with spacers or sistered rafters
- ☐ Use stainless steel lag screws with sufficient rafter penetration for loading specifications
- ☐ Make sure rail supports (standoffs, L-feet, or S5! clamps) are appropriately spaced for all loading considerations
- ☐ Choose rail and module clip color to match module frames
- ☐ Make sure rail and modules are properly grounded (Wiley WEEB, Unirac UGC-1, or IlSCO lay-in)
- ☐ Make sure that all mid-clips and end-clips are tight and square, and the appropriate height for the module frame

Access

Rebekah Hren (rebekah@honeyelectricsolar.com) is a licensed electrician in North Carolina. She designs and installs PV systems with Honey Electric Solar Inc. teaches PV design and installation courses for Solar Energy International, and is coauthor of *The Carbon-Free Home: 36 Remodeling Projects to Help Kick the Fossil-Fuel Habit* (Chelsea Green, 2008).

Roof-Mounting System Manufacturers:

Conergy • www.conergy.us
 Direct Power & Water • www.directpower.com
 IronRidge • www.ironridge.com
 Metal Roof Innovations Ltd. • www.s-5.com • Standing-seam roofs only
 Professional Solar Products • www.prosolar.com
 Quick Mount PV • www.quickmountpv.com • Flashed mounting anchors only
 Shuco • www.schuco-usa.com
 Solar Racks • www.solar-racks.com
 SunEarth Inc. • www.sunearthinc.com • Compression-style rail only
 Thompson Technology Industries • www.thompsontec.com
 Unirac • www.unirac.com

Module-Specific Mounting Systems:

Sharp • www.sharpsolaritson.com
 SunPower Corp. • www.sunpowercorp.com

Other Resources:

American Wood Council • www.awc.org • Wood-strength tables
 PVWatts • www.nrel.gov/rredc/pvwatts/



ABUNDANT RENEWABLE ENERGY

4-DAY DEALER TRAINING

MARCH 26TH - 29TH, 2009

WORKSHOP TOPICS:

- TURBINE AND TOWER SITING
- HOW MUCH WIND IS ENOUGH?
- TYPES OF SYSTEMS
- TYPES OF TOWERS
- LIGHTNING PROTECTION
- TOWER DESIGN AND INSTALLATION
- ELECTRONICS DETAILS AND INSTALLATION
- SAFETY!
- DEMOS OF ARE110 AND ARE442 IN ACTION

ABUNDANT RENEWABLE ENERGY
 22700 NE MOUNTAIN TOP ROAD
 NEWBERG, OR 97132
 503.538.8298
 971.404.3059 (FAX)
 INFO@ABUNDANTRE.COM
 WWW.ABUNDANTRE.COM



SOLAR ENERGY INTERNATIONAL



HANDS-ON WORKSHOPS & ONLINE COURSES



SEI RENEWABLE ENERGY WORKSHOPS

- PV Design & Installation
- Advanced PV-Design Criteria & NEC
- Grid-tied Photovoltaics
- Women's PV Design & Installation
- PV Lab Week
- Solar Hot Water
- Building for the Future
- Intro to Straw Bale Construction
- Strawbale Construction & Plasters
- R.E. for the Developing World
- Solar Water Pumping
- Micro Hydro
- Residential Wind Power
- Home Built Wind Generators
- Wind Electric Systems Maintenance
- Electric Car Conversions
- R.E. for Educators



Upcoming Featured Workshops

• • • • •

Intro to Straw Bale Construction

Carbondale, CO: May 8-9

Building for the Future; Sustainable Home Design

Carbondale, CO: May 11-15

Women's PV Design & Installation

Paonia, CO: June 1-12

*Workshop Schedule Available Online

2009 ONLINE COURSES

Building for the Future

Oct. 12- Nov. 22

PV Design

Apr. 20 - May 31
May 11 - June 21

Advanced PV: Design & NEC

Apr. 27- June 7
June 8 - July 19

*visit website for online course schedule & descriptions

www.solarenergy.org

RE-SOURCES

2009 Energy Fairs

Spring and summer bring us renewal after a long winter—and what better time to renew your interest in energy? Renewable energy fairs offer the perfect opportunity to get the scoop on the latest gear, take advantage of educational workshops, and tap into local RE expertise in a casual, festive atmosphere. Most events are family-friendly, with activities to kindle young ones' interests in all things solar. Admission prices are friendly as well—for the cost of a night at the movies, you can get your solar start, have a great time with other like-minded folks, and maybe even walk away with sweet deals on renewable energy equipment.

April

- **North Country Sustainable Energy Fair**
Canton, New York; April 24–26
www.ncenergy.org

May

- **Northwest Solar & Clean Tech Expo**
Portland, Oregon; May 1–3
www.nwsolarexpo.com

June

- **Rhode Island Sustainable Living Festival & Clean Energy Expo**
Coventry, Rhode Island; June 6 & 7
www.livingfest.org
- **RE & Sustainable Living Fair (a.k.a. MREF) 20th Anniversary**
Custer, Wisconsin; June 19–21
www.the-mrea.org
- **Michigan Energy Fair**
Onkama, Michigan; June 26–28
www.glrea.org

Courtesy Tom Brown, www.the-mrea.org



Courtesy Jeremy Higgins, www.the-mrea.org

July

- **SolarFest**
Tinmouth, Vermont; July 10–12
www.solarfest.org
- **Shoreline Sustainable Living & RE Fair**
Shoreline, Washington; July 18
www.shorelinesolar.org
- **SolWest**
John Day, Oregon; July 24–26
www.solwest.org

August

- **Illinois RE & Sustainable Lifestyle Fair**
Oregon, Illinois; August 8 & 9
www.illinoisrenew.org
- **SolFest**
Hopland, California; August 8 & 9
www.solfest.org
- **Southern Energy & Environment Expo**
Fletcher, North Carolina; August 21–23
www.seeexpo.com
- **Crestone Energy Fair**
Crestone, Colorado; August 29 & 30
www.joinlas.com/cef/

September

- **Iowa Renewable Energy Expo**
Norway, Iowa; September 12 & 13
www.irenew.org

- **Rocky Mt. Sustainable Living Fair**
Fort Collins, Colorado; September 18–20
www.sustainablelivingfair.org
- **Pennsylvania RE & Sustainable Living Festival**
Kempston, Pennsylvania; September 18–20
www.paenergyfest.com
- **RE Roundup & Green Living Fair**
Fredericksburg, Texas; September 25–27
www.theroundup.org
- **Solar Fiesta**
Albuquerque, New Mexico; September 26 & 27
www.nmsea.org



Courtesy Jennifer Barker, www.solwest.org

For the Pros & the Public

- **Solar 2009**
Buffalo, New York
May 12–16
www.solar2009.org
- **PV America**
Philadelphia, Pennsylvania
June 8–10
<http://events.jspargo.com/seia09/public/enter.aspx>
- **Intersolar North America**
San Francisco, California
July 14–16
www.intersolar.us
- **Solar Power 2009**
Anaheim, California
October 27–29
www.solarpowerconference.com

POWER

POWER BATTERY COMPANY INC.



ONE GREEN BATTERY



MADE IN OUR NORTH AMERICAN MANUFACTURING FACILITY
WHICH IS FED BY 97% HYDRO ELECTRICITY,
**THE ONLY TRUE
GREEN BATTERY
AVAILABLE.**

www.powerbattery.com
solar@powbat.com

A Second Wind

The idea of generating electricity using the wind appeals to many, but the reality is that wind systems demand the most planning, labor, and maintenance of any home-scale renewable electricity system. Homeowners and installers don't always get it right the first time, and there are lessons to be learned when they don't.

by Ian Woofenden

In May 2001, Don and Bev Grim approached Randy Brooks of Brooks Solar—they were interested in a wind-electric system for their home in Peshastin, a small town in central Washington. They wanted to participate in the Sustainable Natural Alternative Power (SNAP) incentive program in the Chelan County Public Utility District service area, which would pay up to \$1.50 per kilowatt-hour for green electricity.

Randy and his crew were familiar with SNAP after having installed a Bergey Excel wind turbine to help June and Charlie Nichols reap the program's benefits (see "Betting the Farm" in HP96). But Randy was relatively new to wind generator siting, and the available wind maps at the time were not terribly useful. He suggested to Don and Bev that they install a meteorological (met) tower to gather wind data, but they were not interested in the added expense (\$5,000 to \$15,000) or time required. Don and Bev were convinced that the site was windy, and Randy observed the topography and was inclined to agree.

The tower and turbine at its original site in Chelan County, Washington.



Courtesy Randy Brooks (2)



Ian Woofenden

Inset, top: The forms, rebar, and rebar supports. Inset, bottom: The finished tower footing.



Courtesy Randy Brooks

Off the Drawing Board

The wind installation moved from concept to project over the next few years, with the concrete footing poured in May 2002, and the 100-foot tower and Bergey Excel turbine installed in October 2002. Randy was joined by Bill Hoffer in prepping the site, and by his western Washington crew of Kelly Keilwitz, Rose Woofenden, and yours truly for the tower assembly and crane installation.

The turbine was assembled on the tower, then lifted onto the base by a crane.

Courtesy Don Richmond (4)



Once it was confirmed that a lack of wind was the culprit causing low energy output, the system was disassembled and loaded onto a flatbed trailer for transport to a new site.



We left the Grims' home confident that we'd set them up with a productive system. The turbine went online and began to sell electricity to the Chelan County PUD, with a dedication ceremony in July attended by utility officials, local politicians, and other interested people from the area. Don and Bev received their first check for anticipated green tag earnings.

After helping with an installation, I always look forward to hearing from the contractor and homeowner about how the system is performing, but the first reports in this case were discouraging. After three months, only about 100 kWh had been produced. The full first year of data was even more disheartening: The Grims' turbine had only generated about 500 kWh, or an average of less than 1.4 kWh per day.

At first, we wondered if there was a performance issue with the turbine, and there had been some glitches with the inverter. But the anemometer that had been installed on the tower told of a more permanent problem. The average wind speed reported was very low—less than 6 mph in those first three months. We hoped that the initial period was an anomaly and that the overall average would be much higher. But after 15 months, our fears were confirmed by a wind-speed average of only 4.3 mph. According to the turbine manufacturer's projections, with an 8 mph average, the turbine would have produced about 3,000 kWh per year; a 12 mph average would have produced 11,000 kWh per year.

What happened? The owners' eagerness coupled with a lack of solid resource data led to a waste of time, effort, and 48 cubic yards of concrete in the ground, and about \$55,000 spent. While external appearances and anecdotal observation seemed to indicate a good wind site, the reality of low wind speeds and poor turbine production proved otherwise.

Seven years later, the wind maps available are considerably better, and would likely have helped avoid this situation. The free mapping database from AWS Truewind (see Access) indicates a mean average of only 4.8 mph at a 60-meter (197 foot) height at the site—much lower than the 8 to 14 mph suggested for a viable system.

The truck, with tower and turbine ready for transport.



After almost four years, Don and Bev concluded that they had made a poor investment, and advertised the machine and tower for sale. The concrete weighs more than 70 tons, so reusing it in another location was out of the question, but Don and Bev hope to use it as a level surface for a future PV array.

Have Site, Need Turbine

In March 2008, RE engineer Randy Richmond contacted me. His family had purchased property in Ellensburg, Washington, with the express purpose of installing a wind generator, and he was looking for recommendations. I mentioned the Grim turbine, so the two Randys got together to inspect the system. They negotiated a very reasonable price for the complete system, and Randy Brooks put the wheels in motion to move it.

While Randy Richmond worked with local authorities for permission to site the turbine on his vacation property, Randy Brooks gathered his de-installation crew. In early June, we attached a crane, unbolted the tower from the foundation, and tipped the whole thing over. Turbine blades, tail, and then generator were removed and stowed, leaving us with a bare tower.

Brooks had arranged for a flatbed semi trailer to haul the tower and



The turbine and tower are reassembled and hoisted at the new site—one with a considerably better wind resource.

Courtesy Don Richmond (5)



turbine 40 miles to Ellensburg. We decided to partially disassemble the tower into five 20-foot sections. This strategy worked well, and we nested the sections on the semi, with the turbine strapped down on the back end. All then headed south, leaving a bare concrete slab at the Grim property.

Relocation & Reinstallation

Randy Richmond and his wife Melissa had multiple reasons for purchasing their weekend cabin in eastern Washington, but their primary motivation was a site for a wind-electric system.

This site clearly had a better wind resource than the Grim site. There are two commercial wind farms nearby, and the wind maps show a 14.5 mph average wind speed (at 197 feet) in their neighborhood. The landscape is largely treeless, and neighbors complain of consistently strong winds. While no on-site anemometry was done, data from nearby sources, including a commercial wind energy company, confirmed our initial observation and verified the wind maps.

When the semi and crane arrived on site, we unloaded the sections and preassembled the tower near the new foundation site. We opted to only assemble the tower without the turbine, getting a head start on the future installation. The installation was scheduled to be resumed a few months later, to give Richmond time to prepare the site. In June, the tower site was excavated, forms were built, and rebar was set in 38 cubic yards of concrete. Richmond also fine-tuned the electrical and monitoring systems for the turbine, including wind monitoring equipment, radio antennas, and a Web cam. Provisions were included for selling space on the tower to local agencies and companies needing radio transmitters and receivers.

The crew gathered to resume installation of the wind system in late August. Richmond had done much of the work already, including routing the transmission cables, both underground and on the tower. We quickly finished up the remaining odds and ends before the crane rolled onto the site. This was the sixth Bergey Excel that our crew had installed in seven years, so we worked like a fairly well-oiled machine.

The crane lifted the tower so we could prop it up for room to install the turbine. We then lifted the turbine head and bolted it to the tower, followed by the tail and new, next-generation blades. The blade upgrade led to some head-scratching over the installation hardware and a field modification to make the nose cone fit properly. Meanwhile, with transmission wires secured, furling cable attached, and damper completed, we were ready to lift.

Once the tower and turbine were up, we ran ground wires to the ground rods, and performed electrical and furling tests on the turbine. We left the turbine running unloaded, an acceptable condition for this particular model.

Once final electrical approval was received from state authorities and the utility in October 2008, the system began to produce electricity. In its first 86 days of operation, the

Courtesy Randy Brooks



Proud new owners of the relocated wind-electric system.

The turbine and tower, at their new home on the range.

Ian Woofenden





Courtesy Randy Richmond

The installation crew.

system has produced 2,047 kWh, or an average of 23.8 kWh per day, a far cry from the low performance at the Grim site. Average wind speed at 33 feet was 8 mph in the fall of 2008, and, Randy estimates, probably 1 to 2 mph higher at the turbine hub.

The Richmonds are earning a 12-cent per kWh state incentive payment for their wind energy. The incentive has a \$2,000 per year cap, which Randy hopes to reach. The

electricity produced also offsets the energy consumption of the cabin on the property, further improving the payback.

Lessons Learned

Seven years after his initial meeting with Don and Bev Grim, Randy Brooks has more experience with wind site assessment and system installation. His experience with the Grims leads him to be "much more conservative with wind resource estimates."

Wind systems aren't for everyone, or for every site. In fact, truly good wind sites are not all that common. Wind turbines should be installed well above (at least 30 feet) anything within 500 feet of the tallest obstacle, and taller towers are always better. And as the Grims learned, even adequate tower height cannot overcome a site with a poor wind resource.

It's fortunate for all involved, and for the renewable energy community, that Don and Bev realized their mistake and moved on. This gave Randy and Melissa an affordable opportunity to tap into wind energy. And it put a poorly producing turbine into a new environment where it can now earn its keep.

Access

Ian Woofenden (ian.woofenden@homepower.com) enjoys moonlighting on the Brooks Solar crew, which has provided many rewarding wind installation experiences.

AWS True Wind • www.awstruewind.com • Online wind maps

Bergey WindPower Co. • www.bergey.com

Brooks Solar • www.brookssolar.com



Become a SunMaxx™ Solar Thermal Dealer / Installer



Call Today:

1.800.786.0329

www.sunmaxxsolar.com

Join Our Team

Join the nation's fastest growing solar thermal network. Our affordable, reliable and proven solar thermal systems offer industry leading cost savings and longevity.

- Reliable [Solar Thermal Technology](#)
- Over 4000 collectors installed Nationwide
- USA & International Certifications (SRCC, Solar KeyMark)
- Pre-packaged turn-key DHW systems
- Commercial Sizing & Technical Support
- Certified Solar Thermal Training (solarthermaltraining.org)

SunMaxx is a trademark of Silicon Solar Inc. Visit www.sunmaxxsolar.com for more information.

MidNite Solar is Striving for Excellence across the planet

email Testimonials

Hi Robin,

Even though I have had an off-grid solar voltaic system for over 20 years, I am a tyro as an electrician. Upgrading to a Magnum Inverter with an Outback MX 60 attached, and getting the system out of the cellar, was cause for a number of hours of cogitation...and fear...and trembling. Central to this neophyte's success was your E-panel. It allowed me to connect this state-of-the-art equipment together with some confidence. I am attaching a couple of photos of my humble project, if you have use, or need, of a testimonial, consider this a rave review of your E-panel.

My thanks for your pioneering work democratizing energy.

Peter Meadowsong



Hi Robin,


Don't know if you remember me, I asked you a few questions last year about a self install using some of your equipment last year in Tonga.

Anyway you had asked for some pics, and I completely forgot until now.

Love your stuff

Paul Stone

Tonga



Robin, I need 6 MNE175ST's


Wow! What are you doing with all these E-Panels?

Just selling a quality product.

Thanks, Ralph P. O'Donnal, Jr.

GSW Power Systems

Kingman, AZ 928-300-4067



Robin,

Thanks for the update on the Classic and beta testing. We are really excited here about this one. It's been such a pleasure working with your products over the years. You and your team are the best!

Jack West

Talkeetna Alternative Energy

Talkeetna, AK 907-733-2035

Hi guys, Independent Power (Auckland, New Zealand) have just sent me an E panel after I performed a single VFX install using the FW250 system. Just wanted to say that the FW250 is a real hassle and the E panel is everything the FW is not! You have a convert here and the MPPT controller you are developing looks great! Reminds me of the Chrysler building.

Cheers,

Bruce Geddes

PowerOn

Robin,

Yes, I just did my first MidNite system and was VERY impressed with the ease of wiring accommodated by the hinged inverter mount. In addition, it cost less than an OB PS2 configuration, takes far less wall space and took me about 1/2 the time to wire it. Also the bypass switch is ingenious and works flawlessly.

For a single inverter, this is surely the way to go!

Todd Cory,

Mt. Shasta Energy Services 530-926-1079

Send your testimonials

today to:

robin@midnitesolar.com

17722 67th Ave NE Unit C, Arlington WA 98223

425-374-9060 www.midnitesolar.com



Mounts for Solar Collectors

OPTIONS FOR GROUND OR ROOF PLACEMENT

by Chuck Marken

Courtesy Rushforth Solar

This site-fabricated mount-set uses few roof penetrations.

Solar thermal manufacturers usually supply the mounts along with their collectors, and factory solutions for mounting collectors definitely make a solar thermal installation easier. But if you install on a regular basis, you may find that making your own mounts is the way to go. Fabricating your own mount-sets is more time consuming but offers rewards in terms of cost and flexibility.

Mount Materials

Even if you plan to make your own mounts eventually, it is sensible to use racks from the collector manufacturer for the first few jobs. Once you have a good idea of how the factory sets go together, you can design your own. A compromise many installers make is to stick with factory sets for most of their jobs, stock extras of the parts that will put them in a bind if they come up short, and use the materials and techniques discussed here for those custom jobs that are bound to come up.

In my 30 years in the solar thermal business, I've seen collector mounts fabricated from recycled bed frames, lumber, steel wall studs, and electrical metallic conduit—but these materials are not the norm. A simple, durable mount-set can be built with pipe, angle, or square stock. Angle-iron (steel angle stock) is the choice of many installers because

of its low cost and ease of use in mounting systems. The common materials are steel, galvanized steel, stainless steel, and aluminum. All of these materials can make durable and strong collector mounts that will last for many decades. Here are some pros and cons of each.

A factory mount-set with a clip that slips into the collector extrusion to transition to Unistrut.



Chuck Marken



Although it's not pretty, this home-built mount-set has survived for more than two decades and still capably holds the collector.



A pool heating system mounted on a site-built rack fabricated from steel studs.

Steel can be used in arid climates, since the possibility of galvanic corrosion between the steel mounts and aluminum collector frame is almost nil. In areas with higher humidity, steel stock will quickly rust and will require periodic maintenance, such as painting. The minimum dimension for $\frac{1}{8}$ -inch-thick angle iron or galvanized pipe is 1 inch. Smaller dimensions bend too much in long lengths.

Aluminum is a preferred material for its corrosion-resistance, and is the material of choice for racks and mounts in most of the solar industry. Aluminum extrusions come in a variety of different strengths and properties, and stronger aluminum is usually more brittle. Aluminum is not as strong as steel and needs to be a little larger-sized—the minimum dimension for $\frac{1}{8}$ -inch-thick extruded aluminum angle is $1\frac{1}{4}$ inches. While aluminum is lighter than steel, it's more expensive, harder to weld, and, unless it is anodized or powder-coated, has a brighter color than the collector frames, so it may stand out more.

Stainless steel (SS) comes in more than 100 grades, designated by numbers that relate to different amounts of alloys. The most common grade for use in collector mounts is 304, but it should not be used in marine environments, since it is vulnerable to chloride corrosion. Instead, 316, an alloy which contains molybdenum to prevent corrosion, is recommended for coastal areas. It is hard to drill and difficult to weld but provides


excellent protection from the elements—it's the choice of boat builders for long-term saltwater exposure. If you're planning to weld stainless mounts, 316L (low-carbon) stainless is a bit easier to weld due to the reduced carbon content. The minimum dimension for $\frac{1}{8}$ -inch-thick SS angle is 1 inch. Stainless stock is similar in cost to aluminum, which has fluctuated in the past few years.

Steel construction studs, steel Unistrut (industrial metal framing), and galvanized steel are sometimes used instead of

A wall-mounted collector with a mount-set that is long on function, but short on aesthetic appeal.



Chuck Marken (3)

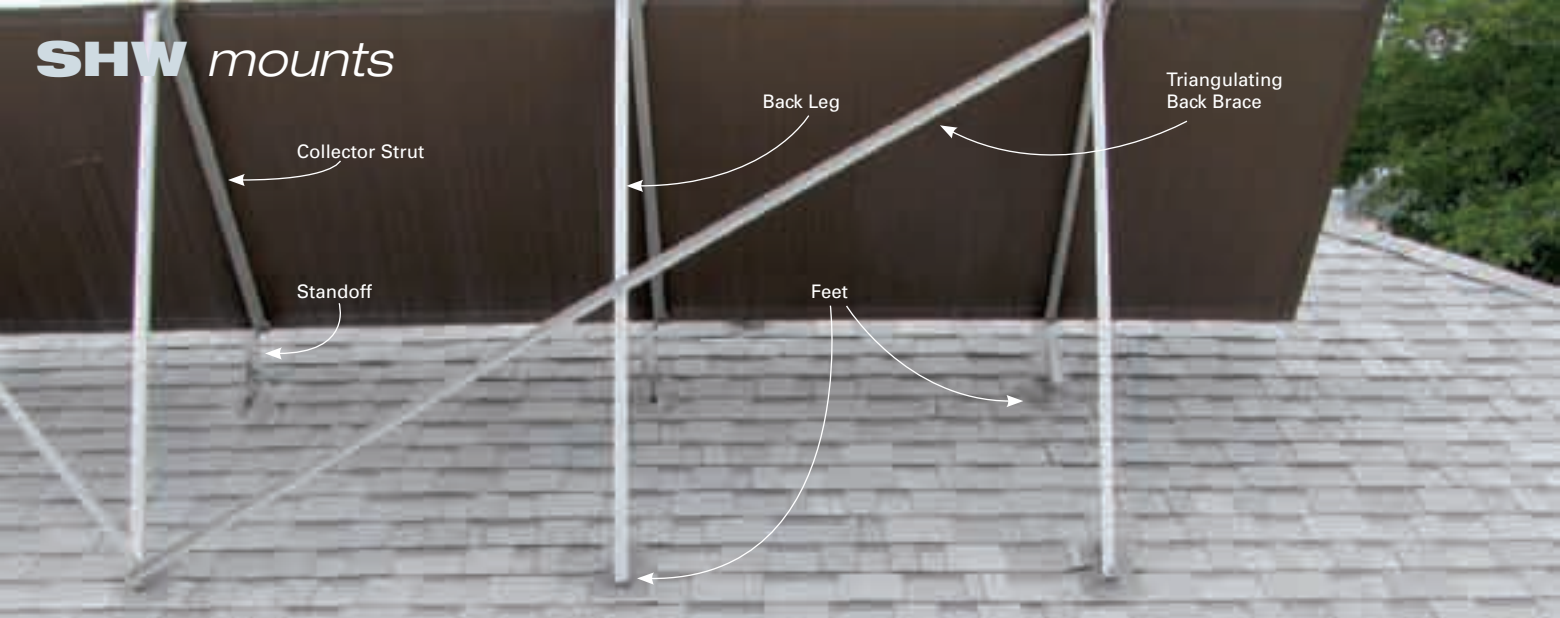

The pieces of a homemade mount-set on the author's home.

aluminum. The material is stronger than aluminum, but can be more difficult to find. Unistrut is like a giant Erector set: it comes in a variety of angles and channels with holes. Braces, connectors, and slip-in threaded inserts (channel nuts) are available as well. It can be more expensive than other options, and is heavier and harder to cut than aluminum.

Lumber can be used to construct mounts, but it is not recommended. The ongoing maintenance (especially on roofs) is a hassle. Although using treated lumber can reduce the periodic maintenance, screwed connections are prone to weaken over time, and cracks and shrinkage can result in unreliable joints and roof penetrations. Using through-bolts will help strengthen connections to treated wood, and racks and sealed penetrations should be inspected occasionally.

Parts & Pieces

Hardware. Regardless of the mount material, stainless steel hardware (nuts, washers, and bolts) is typically supplied by rack manufacturers and is recommended for most climates. In arid climates, zinc-coated hardware may be acceptable.

These site-built mounts were made from angle stock with prestamped holes. In this case, a factory set would have been more attractive.



Chuck Marken (2)

Mounting Feet. The "mounting foot" is the part of a mount-set that is lag-screwed or through-bolted to the rafters of the roof (or other structure). Angle stock is a good material for feet since it can be drilled for bolting to the roof and the 90-degree face can be bolted to legs or struts. One or two holes are drilled into the foot for attaching to the roof structure. A typical single-collector mount-set of this type will have four feet held to the roof with four to eight lag screws or through-bolts. My company has installed thousands of collectors using plastic roof cement ("pookie") as the roof sealant. Care must be taken to put a bed of pookie under the foot, dip the lag bolt into the pookie prior to screwing it in, and cover the foot with a generous amount of roof cement as the last task before leaving the job. To keep roofing

(continued on page 94)

Wind Loading

Depending on where you live and what type of wind speeds your collectors will be exposed to, wind loading may or may not be an issue. Any side-to-side movement in the mount should be eliminated with additional triangulated support members, since any lateral play will allow strong winds to weaken the mount over time.

For collectors that aren't angled more than 4 feet above the roof, $\frac{3}{4}$ -inch angle iron or 1-inch aluminum angle have been used repeatedly without failure, since the wind loading is significantly less at lower tilt angles. Square stock and pipe may be used in the same dimensions for each respective material.

If building officials feel uncomfortable with a mounting system, they may require an engineer's stamp on the system drawing. Also, if you live in an area with high winds, having your mount engineered may save you some headaches down the road. Many collector manufacturers will be able to supply you with wind-loading calculations should they be required. For more information on wind and other loads, see "Dealing with the Forces of Nature" on page 77.

High Performance with Off-the-Shelf Parts

Tim Dawson and Luke Frazer of Solar Collection in Talent, Oregon, use off-the-shelf, 1-inch galvanized pipe for their collector mounts. Pipe flanges secure the mounts to the roof rafters or trusses and allow the penetrations to be flashed with ordinary Oatey roof jacks. They use tubular fittings to join the galvanized pipe, and U-bolts to interface with a short piece of aluminum angle that attaches to the collectors.

Here's an example of a neat installation with two Chromagen 4- by 8-foot collectors mounted with standoffs on a composition shingle roof. Note the position of the self-drilling screws attached into the collectors' frames. Whenever screwing into a collector, stay well away from the glass, since even catching an edge of the tempered-glass face with a screw will give you a bucketful of glass chips to clean up—and the expense of replacing the glass. Likewise, make sure that your hardware is not so long that it could penetrate the header pipe when screwing into the sides of the collector frame.

This design is suited for all roof types, ground mounts, and tilt racks. The mounting system can provide a level rack for antifreeze-based systems or a sloped rack for drainback systems (by using progressively shorter standoffs).



Courtesy Solar Collection, Inc. (5)



Flush or Rack Mounts?

Factory mount-sets come in two types: flush- or rack-mounted. Flush, or standoff, mounts are used to mount the collectors at the same pitch as the roof. A rack mount has precut or adjustable legs to tilt the collector at a steeper angle than the roof.

Both flush and rack mounts can be ordered for ground-mounted systems depending on the design and amount of standardized material used. If a ground mount has a structure built from angle, square, or round stock, a low-cost flush-mount kit can be used as an interface between the site-built mounts and the collectors. The flush-mount kits will likely include some sort of channel feet, with clips or mounts that attach to the collector. The channel feet can then be bolted or screwed to the site-built rack.



Chuck Marken

A factory Novan roof mount-set with more than two decades of leak-free service—the sealant is plastic roof cement.

triangulated angle stock if needed. For a row of collectors, angle stock can be used as top and bottom rails bolted to the collector struts. This configuration makes a “lay-in” mount for a row of collectors, and each collector can be secured to the mounts with self-drilling screws into the collector’s top and bottom frame extrusions.

Access

Contributing editor **Chuck Marken** (chuck.marken@homepower.com) is a New Mexico licensed plumber, electrician, and heating and air conditioning contractor. He has been installing and servicing solar thermal systems since 1979. Chuck is a part-time instructor for Solar Energy International and the University of New Mexico.

Unistrut • www.unistrut.com



warranties intact, be sure that the sealant is made to work with the particular roof material.

Collector Struts. Once the feet are in place and spaced correctly, the collector strut and back leg of the mount-set can be bolted together.

There are many adaptations for constructing a basic mount-set. Mount-sets can also be strengthened using horizontal or

SEALED - MAINTENANCE FREE - DEEP CYCLE BATTERIES

Your Clean Green Energy Solution

Fullriver Battery produces only Sealed Maintenance Free Non-Hazardous, Non-Spillable batteries that will provide you with a cleaner and greener alternative. You'll never need to add water to a Fullriver battery or worry about hazardous gassing or the spilling of acid that occurs with conventional flooded wet cell batteries.

Consumers and industries around the globe are becoming more environmentally conscious every day. Fullriver Battery gives you the peace of mind that you are helping to provide a clean and green solution to your energy needs, with the performance and power that you are looking for.

Contact us for a distributor near you!

800.522.8191 or email us at sales@fullriverdcbattery.com

See our complete AGM battery line up on our website.

800.522.8191 | fullriverdcbattery.com

*5 Year Warranty applies to certain models used in select applications only. Please see fullriverdcbattery.com for more information.

getting our energy from the sun **FOR 20 YEARS**



For more than 20 years the Energy Fair has been the nation's premier energy education event.

THE ENERGY FAIR FEATURES:

- Over 200 workshops
- Over 250 exhibits
- Music
- Inspirational speakers
- Demonstrations
- Kids activities
- And more!

JUNE 19-21, 2009
CUSTER, WI
www.the-mrea.org



715-592-6592 • www.the-mrea.org



5th ANNUAL **Small Wind Power CONFERENCE**

A conference for the Small Wind Professional

TOPICS:

- Updates from manufacturers and distributors on new turbines and system improvements
- Wind turbine testing and results
- Wind resource assessment
- Installer updates
- National Electric Code
- Lessons learned from the field
- Overcoming barriers: zoning, interconnection, and insurance

CONFERENCE COST:

- \$100 Early Bird Rate (register before 4/1/09)
 - \$150 After 4/1/09
- Includes light breakfast, lunch, evening reception and materials

JUNE 16-17,
2009
HOLIDAY INN
CONVENTION CENTER
STEVENS POINT, WI

Be an Exhibitor!
Limited number of
exhibit spaces available.
Call 715-592-6595
for details.

Register online at
www.the-mrea.org



715-592-6592 • www.the-mrea.org

A Life in Hydro

Ron MacLeod

Big and small, Ron MacLeod has done it all in his three decades of hydro-electric experience.



by Ian Woofenden, based on
interviews with Ron MacLeod

Opposite: Ron's 800 kW site in southern New Hampshire.

Insets (top & bottom): A 1.2-meter propeller turbine; a Nautilus installation.

Right: A Nautilus turbine installed just above the high-water level of the creek.

Below: A 2.5 kW DC installation on 28 inches of head in Lancaster County, Pennsylvania.



Courtesy Ron MacLeod (2)



Ron MacLeod's experiences are rich with lessons on how to harness the amazing potential in falling water. From a 22-megawatt project on the Merrimac River in Massachusetts to a 500-watt residential system on an Amish farm in Pennsylvania, he's at home with water, no matter where it is.

Growing up on a farm in eastern Pennsylvania, Ron started tinkering with mechanical things early in life. He also developed an awareness and respect for nature and natural resources: His parents farmed organically, hunted, fished, and coordinated environmental education programs in their community. It's not surprising, then, that he found his calling in a career that married his mechanical aptitude with natural resources.

In 1976, when visiting his parents in Maine, Ron had his first hydro encounter while trout fishing on the Kennebago River near the Canadian border. Coming around a bend in the river, he spied a former hydro site—complete with dam, powerhouse, and turbines—that had been shut down in the 1960s. Most of the powerhouse was boarded up, but one of the windows was open, so Ron climbed in to look around.

The potential of tapping a natural resource with an existing system and the challenge of revitalizing something that had fallen into disuse excited him.

This sparked the start of a long series of explorations into hydro sites and turbines. By his own admission, Ron says he "got obsessed" with commercial hydro projects, and started combing through dam data from state and federal agencies, poring over topography maps, canvassing the countryside, and tapping into the experts—old-time hydro operators, turbine designers, and manufacturers.

He became an expert in the history of the technology. "Energy was so much more valuable 50 years ago. People cared much more about these projects—entire fortunes were made. Hydro is an elitist source of electricity. It's such a good power source, but also, when you control it, you don't have to share it. Power is power; people don't recognize the relationship between horsepower, political power, industrial power, and military power—they are all connected. For instance, in the history of Philadelphia, just about every family that became influential was in one way or another associated with a source of water power."

Although this research was crucial to Ron's professional hydro future—which spanned from turbine and system design to sales, installation, and operation—he says, "During this phase, I learned a lot, but didn't achieve anything in the hydro industry. And I still didn't know enough to know what I didn't know." Until he met Nathan Eberle.

Mennonite Inspiration

In 1980, Ron was living in Chester County, Pennsylvania, just east of Lancaster County, a center of Amish and Mennonite communities. He hadn't had much contact with these groups—also known as "plain people" because of their unadorned dress and simple living tenets. But while working on a building project, he needed a source of inexpensive lumber and found a sawmill run by Mennonites. He was impressed with their honesty, integrity, thriftiness, and determination to eschew material trappings, and focus on their families.

Ron found a font of hydro information in Nathan Eberle, a retired Mennonite millwright in his 90s. As a young man,



Ron's hydro site in southern Vermont.

Nathan would move to a new mill site, supervise the design of the mill, dam, mechanical infrastructure, and electrical transmission, and bring the system into operation. As the Rural Electrification Administration came through the area and the electrical demand exceeded capacity of the existing hydro systems, the communities switched to using gas- and steam-powered engines, and ultimately to a centralized, utility-powered grid. The hydro systems fell into disuse. Ever the conservationist, Nathan pulled out many turbines and stored them in a field, collecting piles of original machinery.

Meeting Nathan was a turning point for Ron, who recognized that new equipment for small hydro sites wasn't available at that time—instead, old equipment had to be refurbished. To do this, you had to be able to identify what equipment you had, and how much power it could produce given a particular head and flow. The specifics of whatever machinery you dug up out of the mud was crucial to success with the projects. As a history buff and researcher, Ron was already acquiring as much information as he could from many manufacturers, but Nathan was a gold mine.

When Nathan died, Ron went to the auction held by the Eberle family with \$273—all of his savings. Ron made fast friends with another Mennonite at the auction, and with him bought 14 water turbines, bidding against scrap dealers. At the auction, Ron met Walter, also a Mennonite, for whom he built a 2 kW hydro system.

After Walter's system was up and running, an elder in the Mennonite community saw what Ron had done and leased

a dam near Walter's farm, developing a 20 kW system on 8 feet of head. Because it is Mennonite tradition to only use power they produce themselves, these hydro-electric projects became very popular in that community. About a dozen sites along the Conestoga River were developed over the next 15 years, most with Ron's guidance.

Into Big Hydro & Into Business

In 1986, after six years of installing small-scale hydro systems, Ron's moved into the utility-scale arena as an operations manager for a 40 MW system at Lowell & Lawrence on the Merrimac River in Massachusetts. The system at Lowell had one large installation and many smaller (500 kW to 1 MW) systems on the city canal system. Being their hydro-electric operations manager required him to be familiar with both big and small hydro systems.

This work propelled Ron into other hydro-electric projects in New England, as well as equipment brokering, since he had experience evaluating a variety of turbines. His installation and operations management experience eventually led to consulting work in Central America on private and U.S. government-sponsored humanitarian projects through the U.S. Agency for International Development. Among other organizations, the National Rural Electric Cooperative Association hired him to survey the hydro sites that had been destroyed in El Salvador after the revolution and determine if they could be rehabilitated. But he was frustrated by the government bureaucracy, which made it hard to complete projects. Poor planning and

not enough funding hamstrung many of the ventures, and Ron decided to take a hydro hiatus.

But like the ebb and flow of rivers, after taking a five-year sabbatical from hydro projects, Ron was drawn back to the field to launch his own business, Nautilus Water Turbines in Pennsylvania. On the day he incorporated the business, he had a massive heart attack, so the business got off to a slow start. But Ron's determination, and the support of his wife, Laura, kept him going. He also called on former colleagues and found that many were open to turning over their turbine designs. Ron was able to add another 20 designs to his turbine collection, giving him the ability to meet a wide range of head and flow requirements. Ron says that "giving a guy a turbine design is not like giving a guy a fish; it's like giving him a fishing rod, because they can be scaled up and down as needed."

Ron started to build his own turbines. The runner, the wheel that receives the water, was based on a design he owned. The scroll case, the conduit directing the water from the intake or penstock to the runner, was Ron's design based on advice he received from his extensive contacts. The product line included 10-inch unregulated, 8-inch unregulated, and 8-inch regulated Francis turbines, used in low- to medium-head situations.

From Manufacturer to Electricity Producer

Even while he was busy building Nautilus turbines, Ron kept pursuing his hydro explorations. Ron and Laura started to think about buying a productive hydro site that would provide income during their golden years. They first purchased a former paper mill in Vermont, but the bureaucratic hurdles of turning this site into a workable hydro-electric system caused them to seek another project. A few phone calls put him in touch with a colleague who



The cover of *HP23* featured one of Ron's systems.



Left: Ron in front of the intake at his New Hampshire hydro site.

Below: The runner sits at the output of the scroll case in one of Ron's Nautilus turbines.



had recently bought a mill site in southern New Hampshire that sold power to the grid. With 18 feet of head and a maximum potential of about 800 kW, it was a feasible scale for an individual to rebuild and operate, and do so profitably.

The site had been online for 15 years but struggled, making about half of the power and money it could have, and had frequent equipment breakdowns. Ron plans to revamp portions of the operation, bringing in new equipment.

Six weeks after he and Laura's purchase of the mill, one 165 kW turbine was up and running: the first of four 300 rpm turbines with 1.2- to 1.7-meter-diameter propellers that Ron will be able to run. He hopes to have the second and third running later this year. Because the water flow varies, the third and fourth turbines may be smaller ones, possibly 50 kW each, to handle lower summer flows without shutting down the site entirely.

Once Ron and his crew have finished overhauling the hydro site, it will take 20 to 40 hours per week to operate and will provide Ron and Laura with a comfortable income. For the electricity they produce, they will be paid a fluctuating wholesale rate for peaking capacity. Plus, they will also earn renewable energy credits. This adds up to a decent income, and the future looks brighter still, with energy prices increasing and supply tight.

Water Power Judgments

As Ron approaches his retirement years, he says he'll be passing the torch to the next generation. "I'd like to find something to do with the turbine designs that I have, to help them be used to do some good in the world."

While Ron sees the benefit of hydro systems, he's not blind to their impacts. He just asks that people consider the alternatives. "Fisherman and kayakers, who are often strongly against hydro installations, seem to overlook that for every dam that is torn down or every project that is stopped, nuclear plants will be developed in their place.

"We're going to have to begin to make judgments, instead of just reacting. It's too late to achieve the very best. Water power has a place," he says. "There was a time when water power was abused, and it still can be. Power and energy can be dangerous and destructive—just like a gun if it is aimed in the wrong direction. But it's not good or bad inherently—it depends on judgment."

Access

Ian Woofenden (ian.woofenden@homepower.com) dreams of a hydro-electric system as he works at his solar and wind-powered home in northwest Washington.



SOLAR DEEP CYCLE BATTERIES

For Reliable Energy Storage Always Demand U.S. Battery's **Diamond Plate Technology®** Batteries

Our Battery line is an excellent energy storage source for most solar applications and our batteries will take the **XTREME** heavy duty to daily charge-discharge cycling.

To See Our Entire Line Please Visit Our Web Site
WWW.USBATTERY.COM

U.S. Battery
Manufacturing
Companies

XTREME
CAPACITY

Puzzled? We've Got the Solution.



A well designed renewable energy system is much more than a pile of hardware.



We live on renewable energy, have 20 years of experience, and have established over 500 systems.

Your best resource is a local pro. Tap into our network of qualified, competent Electron Connection associates across the country.

Installing RE and looking for a competent distributor?

Why talk to a sales technician when you can talk to an electrician? We know what works and how it works. We offer technical support, system design help, prompt shipment, fair pricing and NO BULL. Local referrals always. Electrical competence required.

WE PROVIDE COMPLETE SERVICE:

- Solar
- Wind
- Micro-hydro
- Water Pumping
- Load Analysis
- Local Site Survey
- System Design & Installation
- User Training & Tech Support



Bob-O Schultze
CA Electrical Lic #
613554
OR CCB Lic #
149724



800.945.7587 toll free

www.electronconnection.com online catalog

P.O. Box 203, Hornbrook, CA 96044 U.S.A. • Voice/Fax: 530.475.3401 • E-mail: bob-o@electronconnection.com

Steca PF166 Refrigerator/Freezer



Application: The PF166 is a high-efficiency 5.9-cubic-foot unit that can be used as either a refrigerator or freezer, and can run on either 12- or 24-volt DC. Last year, I installed one on the north side of my family's off-grid home for frozen storage of our homegrown meat and vegetables.

Off-grid living can present challenges to having modern conveniences, and refrigeration and frozen food storage are high on that list. Conventional upright and chest freezers can be energy hogs because of poor insulation, inefficient compressors, and poor placement and use.

For years, we've kept a standard chest freezer outside a relative's on-grid home, about 3 miles away. In addition to the commuting costs and inconvenience, there was the larger problem of energy use: The older, 23-cubic-foot model used about 2 kilowatt-hours (kWh) per day during the coldest weather, and much more in the summer months. To keep it at our home, such an electric load would require increasing our solar- and wind-generating capacity by at least 20%, and would require more propane generator use on calm, overcast days.

When considering appliances for an off-grid home, it's critical to select for extremely high efficiency, unless your pocketbook can afford a huge renewable energy (RE) system to generate lots of kWh for wasteful appliances. It generally shocks people to hear that we spent almost \$3,000 on the fridge in our kitchen, for instance. But if we had purchased a typical fridge, we would have had to spend much more to expand our renewable generating systems—or run our fossil-fuel generator more every winter.

As a middle-class off-gridder without deep pockets, I'll opt for the high-efficiency appliance most every time. So when the Steca PF166 came along, I was happy to add it to our home's collection of appliances. I had worked with Steca's solar charge controllers in simple, off-grid systems in Central America, and was impressed with their quality and the user-friendliness of the interface. Steca is a German company that has been making products for the RE market since 1990. I expected nothing but high quality from them, and their freezer—which hit the market in 2007—delivered just that.

Installation

The installation was pretty straightforward, requiring rudimentary electrical abilities and some heavy lifting (or a good dolly). Note that the PF166 is a 12 or 24 VDC appliance. It will not work on 120 VAC or 48 VDC—though it would be worth considering a DC-to-DC converter if you have a 48 VDC battery bank.


The freezer is hardwired to a 12 or 24 VDC circuit, and be sure to add the appropriate breaker in the circuit. The PF166 comes with a heavy-duty flexible cord. Proper polarity must be observed to operate, though the unit is reverse-polarity protected.

Install it on a flat, level surface, preferably in a cool location. Avoid installing the unit near heat sources or in direct sunlight. Keep at least 8 inches of clearance behind and beside the freezer to keep the ventilation grills unobstructed and ensure optimal cooling.

Features

The Steca freezer is small—at 5.9 cubic feet, it will not hold a full beef or a year's supply of salmon. But small can be beautiful, and it's worth asking yourself how big of a freezer you really need. If you have frozen goods soaking up your electricity for more than six months out of the year, perhaps you should consider cycling produce more quickly and using a smaller unit. In our home, we have two small, off-grid freezers, which gives us the option to run one or both as needed.

Monthly Energy Use & Ambient Temperature

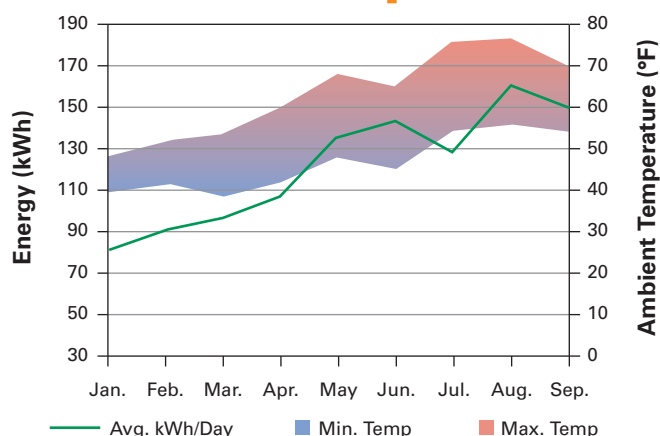

The PF166's construction is clean, durable, and modern—inside and out. Two hanging baskets are included, as well as three freezer trays that act as partitions. A chemical ice pack prevents rapid temperature change in the event of a power outage.

A closeable drain allows easy cleaning after defrosting. Steca claims that their patented StopFrost system dehumidifies the incoming air that normally gets sucked into a freezer as the contents cool, significantly reducing the frost inside while increasing overall cooling efficiency.

Because freezers are “always-on” cycling appliances, users can't control these particular energy loads. However, the Steca has a low-voltage disconnect feature to protect a home's battery from ultra-deep discharge. The low settings are only reliable for emergency situations. Be aware of your battery's state of charge, and charge the bank fully on a regular basis.

Programming

The unit has sophisticated controls and monitoring. Its on/off switch makes it handy to shut down the unit without having to unwire the DC feed. The display flashes a symbol to indicate that the unit is off, but that electricity is still connected.

High Points

- Very low energy use
- Modern appearance
- Easy cleaning
- Low-voltage disconnect
- Power loss & maximum temperature alerts

Low Points

- DC only
- No 48 VDC available

Tech Specs

Steca PF166 Refrigerator/Freezer

External Dimensions: 36.1 x 34.3 x 27.9 in.

Weight: 134 lbs.

Nominal Voltage: 12 & 24 VDC (automatic selection)

Input Voltage Range: 10–17 V & 17–31.5 V

Low-Voltage Disconnect: 10.4 V & 22.8 V

Power Draw: 40–100 W

Recommended Fuses: 15 A & 7.5 A

Cooling Method: Danfoss DC compressor

Usable Cooling Volume: 5.9 cu. ft.

Refrigerator Temperature Range: 35.6–53.6°F

Freezer Temperature Range: -4–14°F

Ambient Temperature Range: 50–109°F

List Price: \$1,200

Warranty: Two years

While we have only used the Steca as a freezer, it also has a refrigerator mode, with a range of 35.6°F to 53.6°F. The default factory setting is 46.4°F, but a simple menu allows you to change to freezer mode, and another menu allows you to specify the temperature to within 1°. The operating temperature is displayed in either Fahrenheit or Celsius.

A reassuring feature is the power outage display, including an audible alarm and a flashing symbol. The unit also displays the highest temperature reached, so you'll know whether your food has thawed to the point where you should be concerned about its safety.

Performance

Steca's performance predictions suggest that this unit will consume 200 to 1,100 watt-hours (Wh) per day in freezer mode, and 50 to 350 Wh per day in refrigerator mode. These numbers depend on the ambient temperature and the thermostat setting. The manufacturer claims that the unit will run as a refrigerator on the energy from a single 70-watt solar-electric module “in most climates.”

The low energy use of this unit is nothing short of remarkable. I thought our previous low-voltage freezer was an energy sipper, but the Steca PF166 takes the prize. While our previous DC freezer is an older model (and the company has made advances since we bought it), compared to it, the Steca uses about half of the energy per cubic foot of freezer area. Compared to our on-grid freezer, the unit uses about one-fifth the energy per cubic foot.

Over our 10-month test period, the Steca averaged 120 Wh total per day. For context, 120 Wh is less than running three

Testing Tools & Method

We relied on two testing tools in evaluating this unit's performance. For energy consumption, we used a Watt's Up Watt Meter & Power Analyzer (www.rc-electronics-usa.com), which logs watt-hours, instantaneous and peak watts, instantaneous and minimum volts, instantaneous and peak amps, and amp-hours. Two meters were tested against each other initially, and a correction factor was applied to attain accuracy.

For logging minimum and maximum temperatures, both ambient and inside the unit, we used a Radio Shack maximum/minimum hygro-thermometer with remote.

15 W compact fluorescent light bulbs for three hours and much less than what it takes to do a load of laundry or dishes using high-efficiency appliances. This freezer is truly an energy sipper!

Our situation is not exactly average, since the unit is installed outside in a shed on the north side of our building. We also live in a moderate climate, with an average summertime high of about 72°F, so our freezer's performance numbers are probably better than if it was installed inside, or outside in warmer climes. Seek out a location for your freezer

that minimizes energy use, and then be realistic about your climate and situation.

Chill Out

So how does this freezer achieve its high efficiency? Primarily by using a high-efficiency compressor and heavy insulation. The Danfoss-made compressor has electronic variable speed control and uses a CFC-free coolant (R-134a). The 4-inch-thick foam insulation is seamless, with cooling tubes at the inner surfaces and a heat exchange condenser embedded in the outer surfaces. The door fits and seals well, keeping the coolness in.

This freezer/refrigerator gets high marks from me. It does its job well, using only a fraction of our precious solar and wind electricity. Its modern, clean box is attractive and easy to clean, and the lockable lid provides security. Its intelligent processor and monitoring delivers good temperature regulation and great information. Steca's done a fine job with this machine. If you have an application for a small, low-voltage DC fridge or freezer, check it out.


Access

Reviewer: Ian Woofenden (ian.woofenden@homepower.com) enjoys frozen beef, pork, veggies, and berries with his family at their off-grid home.

Manufacturer: Steca • www.stecasolar.com

U.S. Distribution: SunWize • www.sunwize.com






It's as clear as black and white

EnerSys, the largest manufacturer of industrial batteries in the world has been building the Solar-One battery for over 10 years.

EnerSys and Northwest Energy Storage offer the best 10 year battery warranty in the industry. 7 year free cell replacement 3 year prorated.

It's as clear as black and white, Solar-One batteries set the standard for Renewable Energy.



Batteries with HuP[®] technology

Solar-One Batteries incorporate the patented and proven HuP technology with the thickest positive plate (0.310") in the Renewable Energy Industry.

Solar-One Batteries are available in 9 sizes from 845 A/H - 1690 A/H. Many sizes in stock. FREE shipping in the lower 48 states.

Solar-One Battery users described the Solar-One as: "A Great Value", "Bullet Proof", "Reliable".

Northwest Energy Storage 800-718-8816 or rob@nwes.com or www.solaronebatteries.com Dealer inquires welcomed



Ready Reserve Foods, Inc.

Is your family prepared for an emergency? Right now our country is facing the most frightening time in our history; food shortages, recession/depression, war, drought, floods, nuclear threat, terrorism, etc. Now is the time to ensure your family's well being and safety.

We carry:

- One year food supplies for 1-4 people
- 1-6 month food supplies
- Individual cans of over 100 different products for your own personal preference
- Water storage products
- Preparedness products

Our products have a shelf life of 12-20+ years if stored properly. All of our dehydrated food products are vacuum packed in double enameled steel cans and flooded with nitrogen to ensure the wellness of the food. We also carry all of your home preparedness needs; water barrels, first aid kits, grain mills, and other survival necessities. Call us now to build your own emergency storage system or to add to what you already have. Ready Reserve Foods is the manufacturer of all food products. This is factory direct. We take great pride in the products we offer.

CURRENT WHOLESALE PRICING SPECIAL!

U-1 FAMILY UNIT (1 YEAR FOR 4 PEOPLE)

WAS \$4509.40 NOW \$2999.00

U-2 SECURITY UNIT (1 YEAR FOR 2 PEOPLE)

WAS \$2296.40 NOW \$1499.00

U-3 MODULAR UNIT (1 YEAR FOR 1 PERSON)

WAS \$1542.70 NOW \$999.00

U-4 DELUXE ONE YEAR RESERVE (1 YEAR FOR 1 PERSON)

WAS \$2098.00 NOW \$1399.00

ALL INDIVIDUAL CANS ON SALE AT WHOLESALE PRICING!!!



SPECIAL OFFER!

Restaurant Quality Par-Boiled White Rice by the Case (6 #10 cans)

33 lbs. Net Weight—BELOW WHOLESALE COST!

\$29.99 PER CASE + S/H

RETAILS FOR \$75.00 + S/H!

Subject to stock on hand!

Ready Reserve Foods, Inc.
1-800-453-2202

Call for your free catalog and information booklet



1442 S. Gage Street
San Bernardino, CA 92408
(909) 796-0098
WWW.READYRESERVEFOODS.COM
READYRESERVE@AOL.COM

EV

CONVERSION

Safety First & Foremost

by Ken Koch

An electric vehicle (EV) is as safe and reliable as any vehicle that uses gasoline or diesel fuel. But, as with any vehicle, an ounce of prevention is worth a pound of cure. By being aware of the potential hazards, you can prevent damage to the vehicle as well as injury to yourself and others.



Courtesy www.evenenergyfilms.com (2)

No single component is capable of meeting the safety needs of your EV. The full defense comes from safety in numbers—the more components you have to protect your propulsion system, the less vulnerable your vehicle will be in the event of an emergency. Here's a rundown of the main gear to make your EV ride as risk-free as possible.

Motors & Motor Insulation

The motor should be sized appropriately for your application—don't try to use a 10 hp motor when 20 hp is required. An undersized motor can overheat and eventually burn up.

Even with a properly sized motor, you'll still need to be conscious of insulation system ratings—which range from 90°C for low-end commercial motors to more than 300°C for high-end military ones. The higher the insulation's thermal rating, the better the motor can withstand heat and overloading. If the motor's insulation system is compromised, armature and field windings can begin to short out—eventually causing the motor to overheat and possibly ignite. The best commercially available EV motors have insulation systems rated for 180°C (UL Class H rating).

This well-done conversion shows off good cabling practices, well-made battery racks, and an orderly installation.



Emergency Disconnects

Most converted EVs use multiple flooded-cell, lead-acid (FLA) golf cart batteries because they're available, affordable, and durable. But FLAs have very low internal resistance, and some can supply 2,000 amps or more into a short circuit. This magnitude of current can easily cause a fire or explosion if there isn't a quick and reliable way to interrupt it. That's why multiple emergency disconnect devices—such as fuses, circuit breakers, and contactors—are necessary. If one emergency disconnect device should happen to fail, others are there as backups.

Safety Fuses. When too much current flows, a fuse provides an automatic interruption of power by breaking the circuit. In an EV, use at least one safety fuse at the main battery pack to protect system power components from damage due to excessive current. To perform as needed, a fuse must be rated at the voltage, current, and time characteristics appropriate to its application. For example, if a propulsion-pack voltage is 120 V and the motor controller current limit is 500 A, the safety fuse should also be rated to handle these values. "Blowout time" can be slow or fast, depending on your preference: The fuse can blow instantly, or it can be designed with a delay curve. This allows it to tolerate a slight overcurrent for a short time, preventing "nuisance blows" due to a momentary current spike that can be safely ignored.

Several types of safety fuses can be used in an EV. An *enclosed* safety fuse, such as the Ferraz Shawmut A30QS500-4, is best because the fuse element is enclosed in a fire-retardant powder. This powder and its fiberglass or ceramic case can alleviate a fire or explosion in the event of a very high-current overload. With its open construction, a traditional *fuse link* is usable in most applications. It should, however, be enclosed in a piece of high-temperature insulated tubing, such as phenolic, when mounted above a battery. If an unenclosed fuse link should happen to blow, it will spew molten balls of metal that could burn right through a battery case—ruining the battery, or worse yet, causing a fire or explosion. For maximum safety, every implementation or control line that ties into the propulsion system should be protected with a small, high-voltage fuse rated at 1 A or less. Each fuse will protect its small-gauge wire from catching on fire if a short ever occurs within the instrumentation or control circuit. To provide maximum protection, the fuse should be located as close as practical to the propulsion system's tie-in point.



Left: A Ferraz Shawmut enclosed-link fuse—great for use above and near batteries.

Right: A typical open-link fuse, with insulated extensions on the terminal.

Circuit Breakers. A circuit breaker provides a fail-safe manual and/or automatic interruption of power. It also can be used to shut off battery power during servicing or repairs. As with a fuse, a circuit breaker must be rated for the voltage, current, and time characteristics appropriate to its application.

For maximum safety, a circuit breaker should be mounted within easy reach of the EV driver. This can be accomplished by mounting the unit in the dashboard or console of the vehicle, but requires running the large-diameter battery cables into the vehicle's interior. An alternative is to mount the circuit breaker with the power electronics. Then, it can be activated by a push-pull control cable and knob located on the dashboard or console. This shortens the length of high-current cable used, and keeps high voltage and high current out of the vehicle's interior.


Contactors. In an EV propulsion system, high-voltage inductive loads and extremely high current levels are common. A contactor is an electromechanical device that switches high voltage and current by means of a low-level control voltage. It is similar to a relay, except that it is much more robust and can switch highly inductive loads that might otherwise burn up or weld the contacts of a relay when the circuit is opened.

This "main contactor" is installed in the positive or negative line between the propulsion battery pack output and the motor controller input so that battery power can be

Contactors are heavy-duty relays that open and close the high-energy battery circuits in an EV.

Quick Tip

Check and retighten all battery terminal hardware at least once per month, as the vibration experienced in a moving vehicle can cause them to loosen. On a battery terminal, this can cause enough heat to melt a battery post, necessitating expensive battery replacement.

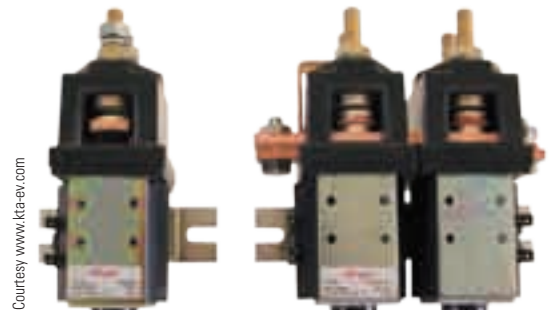



Courtesy www.kta-ev.com

Circuit breakers provide both overcurrent protection and a means of opening the battery-to-controller circuit.

applied or interrupted with the vehicle's key switch. Even though a main contactor's primary function is to *carry* current, the type used should be capable of *breaking* current to an inductive load (i.e., motor) in case of a shorted controller.

The main contactor should be rated for the high voltage and current characteristics appropriate to its application. If a propulsion pack voltage is 120 V and the motor controller current limit is 1,000 A, the Albright Engineering #SW-200B is commonly used. A single #SW-200B contactor is rated only to 120 VDC. When a vehicle's battery system is above 120 V, two #SW-200B contactors may be installed—one in the battery positive line and the other in the battery negative line. Two such main contactors, when activated simultaneously, possess a voltage rating of more than 240 VDC because of their collective interrupting capacity.

Albright contactors include magnetic "blowouts"—small magnets mounted in the switching head of the contactors that have the capability of forcing an electric arc outside of the device, effectively lengthening the path over which the arc must travel. The longer distance an arc travels, the better the opportunity to extinguish it.

Inertia Safety Switch. This device will disconnect the main battery pack from the propulsion drive system in case of an accident. The inertia safety switch is a normally closed, low-voltage/low-current device that switches to open circuit on impact. In an EV, this switch can be wired in series with the 12 V power that activates the main contactor. This switch is rated to perform only low-power switching; the main contactor does the heavy-duty work.



Courtesy www.kta-ev.com

An inertia safety switch provides an automatic disconnect in the event of an accident.

Crimp or Solder?

The debate over whether to crimp or to solder terminal lugs onto heavy-duty cable may go on forever. While some may disagree, the best practice is to crimp all lugs onto wire ends using a proper crimping tool. Should an uncrimped soldered terminal lug secured to a high-current cable ever become loose, it can generate enough heat to melt the solder, causing the lug and cable to separate. A crimped lug will hold to the cable because of its mechanical bond. A crimped and soldered lug will provide maximum mechanical and electrical bonds.

Grounding

A "ground" usually refers to something that is electrically tied to earth ground, but it can also mean being electrically connected to a metallic structure. The high-voltage system in an EV includes the propulsion batteries, contactor, overcurrent protection, disconnects, controller, drive motor, onboard charger, and any lower-current devices that tie into this system. No part of the high-voltage system should be connected to the vehicle frame or metallic body structure. Isolating this system minimizes the possibility of being shocked when touching both a connection point (i.e., a battery terminal) and the body metal. This also minimizes the chance of having a short circuit to the metal body structure or frame if wire insulation becomes frayed or cut and comes in contact with the metal. Some components, including controllers and chargers, are designed not to activate for safety reasons if a high-voltage ground to the chassis is detected.

Wire, Cable, Lugs & Terminals

An EV's wiring should be sized to safely handle the current. Too much current in an undersized wire can cause it to get hot or even catch fire. EVs typically have low-, medium-, and high-

The combination of cable terminal covers, crimped lugs, and heat-shrink tubing make for safe and neat battery cabling.



Courtesy www.evconsultinginc.com

Battery Safety

If properly handled, located, installed, and ventilated, EV batteries can be as safe—if not safer—than gasoline in an internal combustion-powered vehicle. Here's how:

Placement & Containment. Most EV conversions can add as much as 1,200 pounds to the vehicle's stock weight—largely because of the size of the charging system and the weight of the batteries. The first step in a safe conversion is to choose a vehicle with a rust-free, sound body and chassis equipped with good brakes and wheel bearings to handle the additional weight. If possible, try to upgrade any drum brakes to disc for additional stopping power.

Next, it is critical to distribute the battery weight throughout the vehicle and secure the batteries. Too much weight in the back of the vehicle can cause steering sensitivity, making the vehicle too responsive. Yet, too much weight over the front wheels can make every steering-wheel turn an upper-body workout. Distributing the batteries in a way to match the vehicle's original weight over the front wheels should be the goal. The battery weight in the rear will be heavier than stock, and will require the addition of overload springs and/or shock absorbers. Also be sure to mount batteries to maintain the vehicle's low center of gravity.

As a general rule, it's best to keep the batteries out of the passenger compartment for safety reasons. In case of a front or rear collision or a rollover, batteries can leak acid if ruptured or turned upside down. If it's not possible to place them outside of the passenger compartment, you can secure the batteries inside an enclosure.

When it comes to safety, battery containment can't be stressed enough. A plywood or plastic box is not sufficient to hold the

batteries in place during a collision—unsecured batteries have the mass and momentum to break this type of enclosure and launch like deadly acid missiles. Batteries should be held firmly in place with metal battery trays and hold-downs, which can be fabricated from steel or aluminum angle stock. All framework should be welded for maximum strength, and the finished cage should be securely bolted to the vehicle floor or frame with bolts, nuts, and large-diameter washers.

Ventilation. Flooded lead-acid (FLA) batteries are the most common propulsion batteries used in EV conversions today. FLAs will begin to produce hydrogen gas at about 2.37 V per cell during the last 20% of the charging cycle. While the possibility of enough hydrogen collecting to explode is low, caution and safety are always recommended. With batteries housed in an enclosure, fans and vents should be used to exhaust any hydrogen gas outside the vehicle.

Handling. When handling or working around batteries, safe practices should be followed:

- Wear heavy-duty shoes and gloves in case a battery slips while being placed or moved, or electrolyte leaks or spills.
- Wear a face shield or goggles to protect your eyes in the event of an explosion or acid spray.
- To prevent shorting, wrap electrical tape around the unused end of any tools used for removing, installing, and/or tightening battery terminal hardware.
- To prevent electrical shock or shorting, place an insulating cover, such as a small piece of plywood or other insulating material, over the tops of batteries adjacent to the one you're working on.

Disc brakes help compensate for extra battery weight.



In this EV, 75% of the batteries are placed in the rear for good weight distribution.



About 25% of the batteries are placed in the front to help match the original weight over the front wheels.



current circuits. Low-current circuits, such as instrumentation and control lines, can be wired using #16 to #20, insulated, stranded copper wire. Medium-current circuits, such as to the vacuum system, DC-DC converter, and battery charger, can be wired using #10 to #14 wire.

Most EV conversions use #2/0 welding cable for the high-current propulsion drive system and between the propulsion

batteries. With its many strands of very fine wire, flexible welding cable is preferred over stiffer electrical cable types. #2/0 welding cable is suitable for most EV applications of several hundred amps. If the cable lengths are short (as is best) between the motor and controller, #2/0 cable can support up to 1,200 A intermittently. When deciding the proper size of wire or cable to use for an application, consult with the wire

manufacturer's ampacity tables. Keep in mind that these tables are for continuous current flow—not intermittent.

Heavy-duty automotive-type posts with crimped clamp-style—not pressure-contact—terminals are the best connections to use with propulsion batteries. The combination of an automotive post and a heavy-duty clamp terminal offers low contact resistance, low maintenance, and high reliability. Once a clamp terminal is crimped onto a cable end, the copper conductors in the cable can be sealed from potential corrosion by using heat-shrink tubing that contains a mastic glue sealer. Another advantage to using clamp-style terminals is that red and black rubber covers are available to further prevent corrosion and also to insulate them from electrical shock hazard. Ring lugs with L-terminals are a good second choice.

In a typical EV conversion, most of the propulsion batteries will be located in the rear of the vehicle, with only

a few batteries in the front. This almost always results in running two interconnecting cables beneath the vehicle. To minimize the risk of these cables being scraped or cut by road debris, place them within jacketing, such as flexible or rigid PVC conduit or rubber heater hose, for protection. Likewise, wires of any size that are routed through sheet-metal holes or close to sharp metal edges should be jacketed with plastic wire wrap or grommets to prevent cutting or abrasion.

Access

Ken Koch (amphawg@aol.com) is the former owner of KTA Services Inc., an electric vehicle conversion kit and component supply business that has sold more than 1,200 conversion kits since 1984. His latest business venture—EV Consulting Inc. (www.evconsultinginc.com)—provides consulting, system design, and computer modeling for DC systems.



Steca PF 166

Solar Fridge / Freezer

- Automatic switch on 12 V or 24 V system voltage
- Unit runs on a single 70 W module in most climates
- Digital temperature setting and display
- Power outage display
- Fast cooling due to compressor speed control
- Patented Stop-Frost system to reduce condensation



To purchase, contact SunWize Technologies Inc. | 800-817-6527 | info@sunwize.com | www.sunwize.com

INNOVATIVE
SOLAR

an SC Solar Company

Toll-Free
866-856-9819
innovativesolar.com

Expert Solar Design, Unsurpassed Customer Service

Whether you are looking for a solar system to power your entire home, or a small system to provide back-up during a power outage, the sales and design team at **Innovative Solar Solutions** brings the experience and commitment to service that instill confidence in our customers.

- Solar Water Pumping Systems
- Inverters, Charge Controllers and Batteries
- Large Selection of Solar Panels
- Complete Systems – Grid Tied & Off Grid Systems

2725 WESTINGHOUSE BLVD., SUITE 100, CHARLOTTE, NC 28273

**Call for FREE
Water Pumping
Guide**

We carry all major brands:
**Sharp, Kyocera,
Grundfos, Outback,
Conergy**



SOLAR CONVERTERS INC.

We design and manufacture Power Control Solutions for your Renewable Energy Systems!



Linear Current Boosters

- Increases Solar Pump Performance
- 12 / 24 V @ 7 amps
- MPPT
- Voltage Limited
- Fused Output



DC Autotransformers

- Bi-Directional DC-DC Converter
- Battery Balancer / Equalizer
- Converts Battery Power to Different Voltages
- Up / Down Converter



Battery Desulphators

- Extends Battery Life
- Recovers Sulphated Batteries
- Single unit 12 to 48 V
- Adjustable Pulse Strength



Linear Voltage Boosters

- Keeps a Constant Battery Voltage to your Equipment
- Charge a Battery from a Lower Voltage Battery or PV
- Water Pump Booster and Controller



Generator Starters

- Starts / Stops Gensets based on Battery Charge
- Single unit 12 to 48 V
- Controls any Generator
- Temp. Compensated

ALSO...

- MPPT Power Tracker™ Charge Controllers
- Cathodic Protection Controllers
- Voltage Controlled Switches
- Solar Lighting Controllers

Please visit www.solarconverters.com for MORE products and details

C1-199 Victoria Road S., Guelph, ON, N1E 6T9, Canada Phone: 519-824-5272 Fax: 519-823-0325 E-mail: info@solarconverters.com



“An essential resource for any building professional that will be a valuable reference tool for years to come.”

— Brian Gitt, CEO of Build It Green

A thorough, informative, and up-to-date reference on green, sustainable and energy-efficient home construction.


ORDER TODAY. Only \$24.95
Product # 070980, ISBN-13: 978-1-56158-973-9



The Taunton Press
Inspiration for hands-on living®

**Call 800-888-8286
Or visit www.Taunton.com/Green**

©2008 The Taunton Press

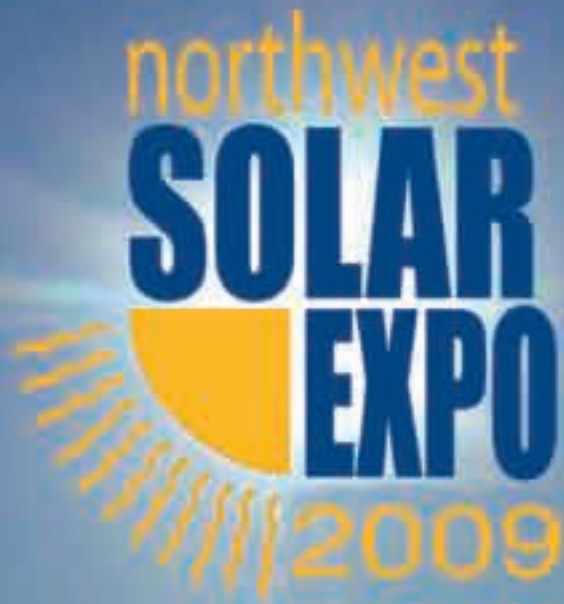

northwest **SOLAR EXPO** 2009

**Featuring OSEIA Professional
Training Conference
April 28 — May 1**

**Public Expo
May 2 — 3**



Northwest Solar Expo 2009 is the fourth annual event offering professional training and business to business networking opportunities, along with current renewable energy and energy efficiency options that families and businesses can implement today.

Professionals Only April 28 — May 1

Open to Public May 2 — 3

Hosted By  **OSEIA**

[www. NWSolarExpo.com](http://www.NWSolarExpo.com)

For sponsorship and/or information call (503) 570-6295



**Western North Carolina
Renewable Energy Initiative**

2009 Workshops Announced

TOPICS INCLUDE:

- WIND ENERGY**
- PHOTOVOLTAICS**
- SOLAR WATER & SPACE HEATING**
- BIODIESEL PRODUCTION**
- MICROHYDRO**

Details for the April - October workshops are being finalized. For more information visit:
wind.appstate.edu
sandersaa@appstate.edu
828-262-2744
Bachelors and Masters degree programs available

Appalachian STATE UNIVERSITY State Energy Office
ENERGY www.energy.nc.gov 1-800-452-7121
N.C. Department of Environment & Natural Resources "Turning a renewable energy vision"

AUTOMAGIC BATTERY WATERING



WE MAKE WATER FROM YOUR GAS

Hydrogen and oxygen battery gas catalytically recombined into pure water and returned to each battery cell. Keeps battery topped off for extended periods of time and reduces maintenance costs. Explosive hydrogen gas is virtually eliminated from the battery area. Corrosive spray and fumes are contained and washed back into each battery cell. Electrolyte kept strong longer, extending the useful power and life of the battery. HYDROCAP Vents simply replace the battery's caps. Battery maintenance is greatly reduced. Write or call for more information.

Hydrocap ENGINEERED BATTERY CAPS 305-696-2504
975 NW 95 St.
Miami, FL 33150


Things that Work.

Quality First!

SunPumps™ Inc.

SOLAR PUMPING PRODUCTS


**SCS SERIES
BRUSHLESS DC**



SUBMERSIBLE PUMPS

Brushless DC Submersible Pumps
up to 2 HP. Heads up to 650 feet
and flow rates up to 250 GPM.


SDS SERIES



SUBMERSIBLE PUMPS

**Diaphragm Submersible
Pumps** with heads up to
230 feet and flow rates
up to 5 GPM.


SCB SERIES



BOOSTER PUMPS


Centrifugal Booster Pumps
from 24 volt battery home
pressure systems to 180
volt panel direct systems,
6 GPM to 30 GPM.

SC-P SERIES



DC Pool Circulating Pumps
from ½ HP to 1 ½ HP,
20 GPM to 100 GPM.

PCA & PCB SERIES



PUMP CONTROLLERS

**Micro-processor based pump
controllers** up to 3 HP.

**Current boosting and voltage
boosting models** available.

SHARP.

**For more products and services
check our web site on-line at:**
www.sunpumps.com

Phone: 1-800-370-8115
(928) 348-9652

Fax: (928) 348-9653

Combiners to DC Disconnects

by John Wiles

In *HP128*, *Code Corner* addressed some code requirements for PV arrays; *Code Corner* in *HP129* covered the math associated with voltage calculations. Now, it's time to safely route that power from the array.

The PV Combiner

PV-source circuits route from the array through combiners (on medium and large systems) and then on to the DC PV disconnect. Normally, two strings of modules can be connected in parallel without requiring a combiner containing overcurrent devices—see *NEC* Section 690.9(A) EX. Batteryless grid-tied PV systems rated above 6 kW may be configured with more than two strings. Since rated voltages range widely and module power ratings can vary from 40 to 300 W, there are no hard-and-fast rules relating the need for a DC combiner to a specific number of modules in an array. If more than two strings are needed, then overcurrent protection on each string may be required and these overcurrent devices are placed in a PV source-circuit combiner (see *Code Corner* in *HP125*).

A combiner may use fuses (typically on high-voltage, utility-interactive systems) or circuit breakers (commonly used on systems operating at 60 volts or below). The 2008 *NEC* requires that combiners be listed to UL Standard 1741—the PV inverter standard: 690.4(D). Although listing is required, UL 1741 has not yet been modified to specifically require that combiners be “dead front” (have nonexposed circuit terminals and busbars once opened).

In cold weather, voltages on the exposed terminals and busbars may approach 600 V on many systems. These combiners meet the intent of the *NEC* requirement that a tool be used to access energized surfaces such as terminals and

This combiner has accessible terminals that may be energized when open.



This “dead front” combiner has terminals safely covered.

busbars—the combiner shown above has a cover that requires a screwdriver to open.

Array to Disconnect

Conductors between modules and those between one end of a string and the other may be single conductor cables in free air. However, as soon as the PV circuits leave the array location, they must transition to a standard *NEC* Chapter 3 wiring method. For roof-mounted systems, that wiring method must be suitable for hot, wet environments and include UV resistance. Electrical metallic tubing (EMT) is frequently used. Conductors are selected based on the short-circuit current being carried in that circuit and must be corrected for the conditions of use, such as on rooftops. In many cases, terminal temperature limitations on combiners or fused disconnects may dictate further ampacity corrections (see *Code Corner* in *HP122* for details).

An equipment-grounding conductor should be run with the circuit conductors in the conduit. In many systems, the equipment-grounding conductors may be as small as #14 between the PV modules. However, in areas where wind, snow, ice, and other environmental factors may introduce mechanical damage, a larger equipment-grounding conductor between modules should be considered (Section 690.46). Where the PV source circuits are unfused, the 2005 *NEC* calls for sizing the equipment-grounding conductor based on 125% of the circuit's rated short-circuit current (I_{sc}). In the 2008 *NEC*, I_{sc} is used directly in Table 250.122 to select an equipment-grounding conductor. The reduction in size of the DC equipment grounding conductor is due to the 2008 *NEC* requirement that nearly all PV systems have ground-fault protection. On systems with PV source or output circuit fuses,

the normal procedure is to use the fuse value in Table 250.122 to look up the required equipment-grounding conductor size (690.45).

The DC PV Disconnect

According to Section 690.14 of the *NEC*, the DC PV disconnect should be installed in a readily accessible location, either inside or outside the building at the point of first penetration of the conductors.

Since Section 690.31(E) allows the PV source or output conductors to penetrate the building surface on the roof (if they are routed in a metal raceway inside the building), it appears that the PV disconnect can be mounted inside the building in any readily accessible location. However, this *NEC* allowance may not be the safest option or even very clearly defined in the *Code*.

This parallel wording of 690.14(C)(1) with the requirements for the AC service disconnecting means that 230.70(A)(1) may need further examination. In the world of AC utility power, removal of the AC revenue meter can effectively disable the AC power in a structure, regardless of the AC service disconnect location. With a DC PV disconnect inside a locked structure, the “readily accessible” definition may not be appropriate. On residences, many jurisdictions require that the PV disconnect be located within sight of the AC service disconnect or meter, which typically means on the building’s exterior. On commercial buildings, the PV system may be located far from the AC service disconnect and a directory may be used to show the location of all disconnects, both AC and DC (Section 705.10). When in doubt, consult with the authority having jurisdiction.

The PV disconnect should break all ungrounded conductors but *should not* open a grounded conductor. Grounded conductors in PV systems might be either the negative or positive source-circuit conductors and should have white insulation, or where larger than #6, be marked with a white marking. The type of module determines which circuit conductor should be grounded and the inverter must be compatible with the polarity of the grounded conductor.

If the grounded source-circuit conductor *is* opened by the switch in the disconnect, the marked grounded conductor becomes *ungrounded* and may be energized with respect to ground, up to the open-circuit voltage of the system. This

A properly labeled PV disconnect.



PV disconnects properly installed in a readily accessible location.

represents an unsafe condition for servicing the PV array. For that reason, the *NEC* prohibits the use of disconnects, breakers, or fuses in grounded PV DC conductors unless they are part of an automatic ground-fault detection/interruption system (Section 690.13).

Section 690.17 and 690.53 of the *NEC* require labeling on the front of a PV DC disconnect. The 690.17 warning is required because the load terminals of this disconnect are connected to the inverter DC input, which may still be energized for up to five minutes after the disconnect has been opened, as capacitors in the inverter are gradually discharged. The 690.53 label, with the DC voltage and current ratings, allow the AHJ to determine that the correct cables have been installed.

Although insulation partially covers upper line-side terminals on disconnects, the switch blades, fuse holder terminals (if any), and the lower, load-side terminals are exposed and easily touched. In the PV DC disconnect, the PV source or output circuits should always be connected to the line-side terminals. Electricity flows from the PV array through the DC PV disconnect, the inverter, the AC disconnect, and, finally, to the grid, so a general safety rule is that the most dangerous circuits should be connected to the protected line-side terminals. The DC input to the inverter is connected to the load-side terminals, and the 690.17 warning label is required as shown.

Attention to the *NEC* requirements in 690 and other articles, plus an understanding of PV equipment and how electricity flows in a PV system, should enable these systems to be installed and operated in a safe manner.

Access

John Wiles (jwiles@nmsu.edu; 575-646-6105) works at the Institute for Energy and the Environment (IEE) at New Mexico State University. IEE provides engineering support to the PV industry and a focal point for code issues related to PV systems.

Southwest Technology Development Institute • www.nmsu.edu/~tdi/Photovoltaics/Codes-Stds/Codes-Stds.html • PV systems inspector/installer checklist, previous *Perspectives on PV* and *Code Corner* articles, and *Photovoltaic Power Systems & the 2005 National Electrical Code: Suggested Practices*, by John Wiles



AAA Solar Supply Inc.

FEATURING:


SUNEARTH

**Liquid Collectors
for Solar Hot Water
& Radiant Floor Systems**

**Other Solar H₂O
Products & Parts**

- Pumps
- Heat Exchangers
- Storage Tanks
- Complete Systems
- Controls
- Batch Water Heaters


Serving the Solar Industry Since 1979

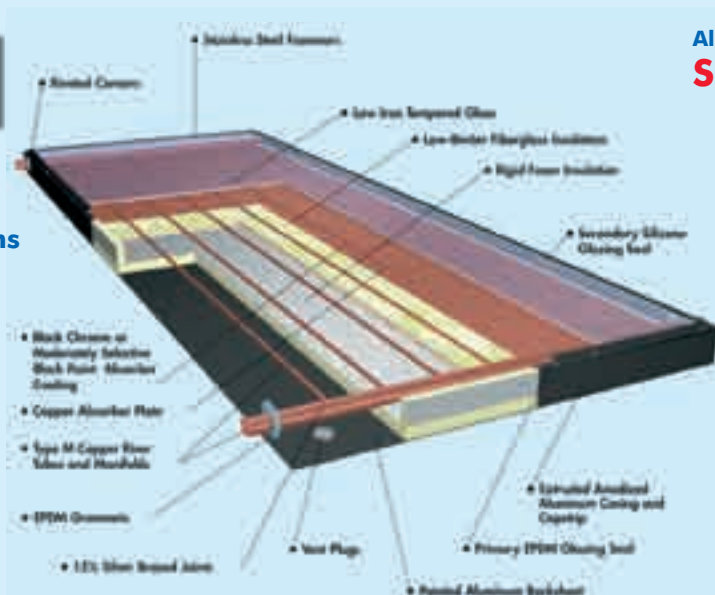

Also Featuring:

SUN AIRE

**Air Collectors
for Home Heating**



**Other Solar Hot Air
Products & Parts**

- Blowers
- Backdraft Dampers
- Controls
- DIY Systems

(800) 245-0311 • www.aaasolar.com • solarstuff@aaasolar.com

2021 Zearing NW, Albuquerque, NM 87014



ELECTRO AUTOMOTIVE

Electric Car Conversions Since 1979

Books ⚡ Videos ⚡ Kits ⚡ Components

- ⚡ **Catalog** Send \$6.00 for our catalog, or visit our web site.
- ⚡ **"Convert It"** We wrote the book on electric car conversions - literally! Send \$30.00 postage paid for this hands-on how-to conversion manual, written in plain English for the home hobbyist mechanic.
- ⚡ **Conversion Kits** Complete custom bolt-in kits for the VW Rabbit and Porsche 914, or a universal kit for other small cars and light trucks.
- ⚡ **Web Site** Visit our web site for our complete catalog, price list, gallery of conversions, and extensive conversion information section.

P.O. Box 1113-HP, Felton, CA 95018-1113 ⚡ 831-429-1989

WWW.ELECTROAUTO.COM ⚡ ELECTRO@CRUZIO.COM

The TriMetric

Model 2020

BATTERY SYSTEM MONITOR



Displays vital battery system data to help users provide better battery care, increase conservation awareness and aid system maintenance.

- Volts • Amps • Amp-hours • Min/Max volts
- Days since charged • Battery % full
- Remote locatable • About \$169

Bogart Engineering • (831) 338-0616
www.bogartengineering.com
 19020 Two Bar Rd. Boulder Creek, CA 95006 USA

The PentaMetric

with more capability

Data logging, five customizable buttons and displays, audible/visual alarms, three "amps" input channels, relay control, computer interface

Is data logging really useful in a system monitor?



When an offgrid system is first installed everything usually starts out working OK. But after awhile it may not work quite like it used to. Bad battery cell? Solar panel developed a problem? You can download the last few weeks of logged data to your computer and compare it to data recorded earlier when everything was working OK. Or email the file to some other "expert" who can analyze it without even coming to your home.


On our website download the document: "How to graph and analyze renewable energy system performance using the PentaMetric logged data".

The PentaMetric system with computer interface only is about \$320. LCD Display unit (above) additional \$199. See website for more information.

Break Free From the Pump

Enjoy the benefits of driving electric and declare independence from expensive foreign oil.

For more info, join the Electric Auto Association at electricauto.org

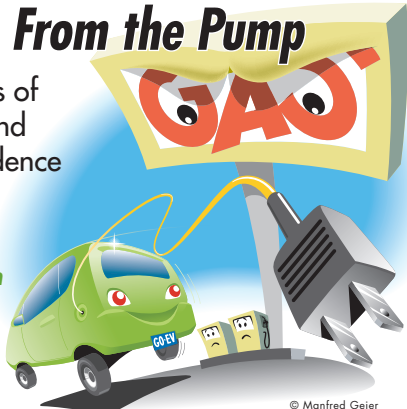

© Manfred Geier

ELECTRIC Bikes, Scooters, Cycles



Dealer Inquiries Welcome

www.iloveebikes.com

LIBERTY

SOLAR ENERGY

FREE ENERGY

BUY MANUFACTURER DIRECT

1-800-806-7109



Things that Work!
 Model 4-1850
 Home Power #67

Digital Power Meters

20-CTR: Measures AC Power up to 10 kW, 100-250 vac single or two phase.

New USB plug in meter, up to 1 gig of flash memory!

ONEMeter: Standard Features include Multiple AC or DC power channels, PC interface, internal logging. Options include Web Interface, Weather Monitoring, and lots more.

4-1850WX: Special meter for Refrigerator Replacement Programs. Detects Defrost Cycle, displays cost/kWh-hrs/yr. Other Models available. Check our website or call for details.

All products are California CEC eligible meters

Ordering or Information call

(269)-365-7744

Brand Electronics
info@brandelectronics.com

www.brandelectronics.com

WINDSTREAM POWER
sales@windstreampower.com
 Phone 802-425-3435
 FAX 802-425-2896

Bike Power Generator™

Harness the energy from the most powerful muscle group in your body. Generate electricity with your bicycle and the Bike Power Generator.

www.windstreampower.com

It Takes An Act of Congress

by Michael Welch

Did you know that U.S. citizens, we taxpayers, actually own a coal-fired power plant? Managed by Congressional vote and administered by the Capitol architect, it sits just blocks away from the Capitol. Long ago, it provided heat and electricity directly to the Capitol itself, but now the power plant makes only steam to heat and cool the structure and 21 other nearby buildings via a maze of underground, asbestos-laden pipes.

The Capitol Power Plant was built nearly a century ago and, as you might imagine, produces pollutants typical of older coal plants. According to a report by the nonprofit Clean Air Task Force, an estimated 515 Washingtonians die each year due to power plant emissions, and the Capitol plant is responsible for 65% of the area's particulate emissions most often associated with ill health effects. Bad, but there are dirtier plants around the nation—so what makes this one special?

Just as Congress has tried to address climate change, they have also tried to deal with this power plant—which literally takes “an act of Congress” for changes to be made. In 2007, House Speaker Nancy Pelosi initiated a project to “green” the Capitol, and switching the Capitol Power Plant to biofuels and natural gas—cleaner-burning fuels—was a proposed part of that effort. Successful in the House, efforts to clean up the power plant have been stymied by powerful Senators Mitch McConnell and Robert Byrd from the coal-bearing states of West Virginia and Kentucky, respectively.

Protesting Coal in Congress

On March 2, the power plant site will have been the target of massive civil disobedience and, as predicted by Greenpeace, “the largest mass mobilization on global warming in the country’s history.” This power plant is the ultimate and perfect place for a major protest. “This demonstration marks the beginning of a sustained effort to draw a line in the sand against this dirty and dangerous fuel,” said Matt Leonard of Greenpeace. “Our leaders cannot promise us a healthy and prosperous future as long as coal is polluting our soil, water, and atmosphere.”

Recent news events point out that pollution from burning coal is not the only associated problem. Last December, more than 1 billion gallons of toxic coal combustion waste broke free from coffers at the Tennessee Valley Authority’s Kingston Fossil Plant, covering more than 300 acres near Harriman, Tennessee, then flowing into tributaries to the Tennessee River—the source of drinking water for millions

living in Tennessee, Kentucky, and Alabama. Then, less than a month later, another TVA waste pond ruptured in Alabama. About 1,300 of these impound ponds are spread across the nation—and, despite toxic materials like lead, arsenic, and mercury that may be leaching into groundwater and soil, they are not yet regulated by the Environmental Protection Agency. According to *The New York Times*, “The lack of uniform regulation stems from the EPA’s inaction on the issue, which it has been studying for 28 years. In 2000, the agency came close to designating coal ash a hazardous waste but backpedaled in the face of an industry campaign.” Of course, the coal industry and its politicians will continue the fight against such regulation, in part because the waste is used as infill for land and in highway construction, and regulation would make its storage and disposal more difficult and costly.

Besides unearthing toxic metals, mining coal causes other problems. Coal producers have found that the cheapest and easiest way to access coal seams is to simply remove the mountaintops that cover them. *USA Today* quoted an EPA source in reporting that, “More than 700 miles of streams across central Appalachia were buried by valley fills from 1985 to 2001” and that “without further restrictions, 2,200 square miles of Appalachian forests—an area twice the size of Rhode Island—will be eliminated by 2012.” Just prior to the end of its era, the Bush administration worked overtime to slacken environmental regulations that applied to its benefactors. One of those efforts resulted in a ruling from the Interior Department’s Office of Surface Mining that coal mines may dump the millions of tons blasted from the tops of mountains into valleys within 100 feet of waterways, if they can show cause for why it should be done. Previously, regulations required no dumping within 100 feet of streams.

The laws that deal with mountaintop removal are complex and include the 1972 Clean Water Act and the Surface Mining Control and Reclamation Act of 1977. But loopholes and intent in the laws leave some details to the regulatory agencies, which are appointed by Presidential administrations, making interpretation and enforcement subject to political influence.

Despite President Obama’s voter mandate to clean up the environment and stimulate the economy—and accomplishing this with a minimum of legislative pork—the power of entrenched politicians and their own agendas remains. Coal companies and other lobbyists and campaign contributors remain a major stumbling block in our system.

Climate Action through Civil Disobedience

Last September, former Vice President Al Gore said, "I believe we have reached the stage where it is time for civil disobedience to prevent the construction of new coal plants that do not have carbon capture and sequestration."

Nonviolent civil disobedience is the last resort for people who want a more just world and are having troubles getting the job done through legal channels. The dictionary definition of "civil disobedience" is *refusal to obey governmental demands or commands, especially as a nonviolent and usually collective means of forcing concessions from the government.*

Every organized use of nonviolent civil disobedience has a code that it requires participants to follow. Participants in the Capitol Power Plant action are required to adhere to the following:

- We will use no violence (physical or verbal) toward any person.
- We will not destroy or damage property.
- We will promote a tone of respect, honesty, transparency, and accountability in our actions.
- We will not carry anything that can be construed as a weapon, nor possess (or consume) any alcohol or drugs.
- We will all hold each other accountable to respecting these agreements.

The National Lawyers Guild offers handbooks for those interested in protesting or civil disobedience at www.nlg.org/resources/publications_handbooks.php.

Campaign Changes

Although Obama campaign promises included focusing on human-caused climate change and stimulating our faltering economy with increased investment in clean technologies and infrastructure, promises are hard to keep when a huge part of the political machine is set on obstructing the process, just as what happened with trying to clean up the Capitol Power Plant.

When his economic stimulus plan hit the House of Representatives, not a single Republican voted for it, despite overwhelming public support. Enough Democrats were in favor of the bill to make it pass. The Senate is a different story, as the Democrats do not have a large enough majority to break a filibuster if one is mounted by the Republicans. So Obama and the Democrats worked hard to negotiate a bill that would gain a handful of Republican votes—just enough to pass. But powerful coal- and nuclear-supporting Senators managed to squeeze in a provision that added \$50 billion in loan guarantees to be available for nuclear and coal power plant construction.

The next step was a conference committee made up of representatives from both legislative bodies and both major political parties to negotiate the final bill, since the House and Senate bills are different. Everything about the stimulus bill was back on the table for discussion. The public response to the dirty-energy threat was phenomenal, with the result that the loan guarantees were axed by the committee.

Optimism over the new administration is running high, but the momentum of the old political machines that favor industry over everything else will be hard to overcome. Certainly, it has been proven effective for the citizenry to take things into their own hands, by vote and direct contact with legislators and regulators or, failing that, the direct action of nonviolent civil disobedience.

Access

Michael Welch (michael.welch@homepower.com)—a firm believer in the power of direct action—missed the Boston Tea Party by a couple hundred years, but has been arrested several times protesting war and nuclear energy in California.





APRS
WORLD, LLC
www.aprsworld.com



Solar Powered Outdoor Wind Data Logger Package, APRS World's most popular package. Perfect for remote wind data collection under the harshest of conditions. Everything you need starting at \$800.



Data acquisition system built to help Midnite Solar with their Classic charge controller testing. Deployed across North America, these systems use the Internet to provide real time data to Midnite's engineers. See <http://www.midnitesolar.com/> for the whole story.

What can we do for you?

APRS World, LLC
P.O. Box 1264
Winona, MN 55987
+1-507-454-2727

inter **solar** North America

Exhibition and Conference



400 EXHIBITORS | 15,000 VISITORS | 1,600 CONFERENCE ATTENDEES

July 14–16, 2009

San Francisco | California | Moscone Center

PHOTOVOLTAICS | SOLAR THERMAL TECHNOLOGY | SOLAR ARCHITECTURE

RESERVE YOUR EXHIBITION SPACE TODAY AND SECURE
A PLACE WITH THE INTERNATIONAL SOLAR INDUSTRY!

www.intersolar.us

 **CONNECTING SOLAR BUSINESS**



Energy Efficient Refrigerators and Freezers

Available in 12/24 VDC or *new* 12/24 VDC / 120 VAC
Runs on 70 watt panel and 110 amp/hr battery in most climates!
Features:

- Thick polyurethane insulation
- Patented low frost system
- Automatic operation
- Easy to clean interior
- Interior light

Contact us at (915)821-0042
www.SunDanzer.com | info@SunDanzer.com



Maverick Solar

HELP YOURSELF TO THE SUN!

HELPING THE DO-IT-YOURSELFER:

- Code Compliant System Engineering
- Load Calculation and Design
- Renewable Energy Components for:
Solar, Wind and Hydro
- Pre-Wired Systems Also Available



Experienced &
knowledgeable!

Sarah Solar says: Thanks!



www.mavericksolar.com 512-919-4493 support@mavericksolar.com

Harris Hydro


Hydro-Power for Home Use

Adjustable Permanent Magnetic Brushless Alternator

- 25 - 30% more efficient than Hi Output Alternator
- Marine Grade Construction throughout
- Re-connectable Stator
- Retrofittable on existing turbine



Manufactured by Lo Power Engineering
P.O. Box 1567
Redway, CA 95560

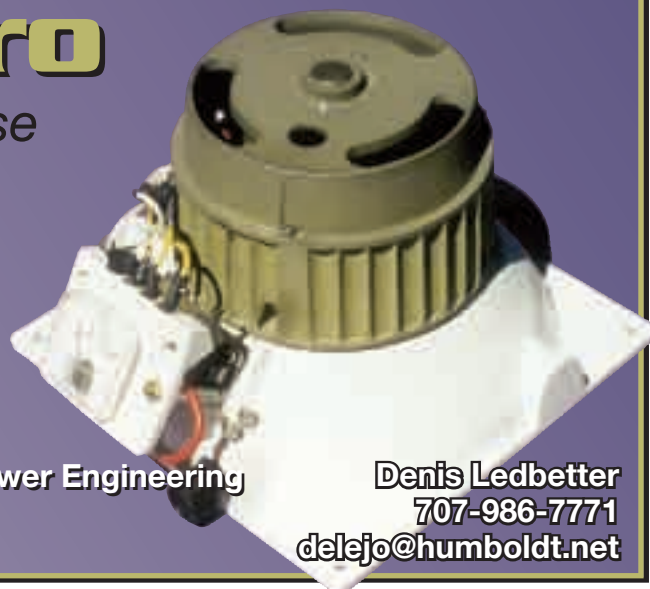

Denis Ledbetter
707-986-7771
delejo@humboldt.net

Re-Cycling

The Jeinkel-Heimer Story

by Kathleen Jarschke-Schultze



My childhood in a big family—two boys and three girls—in the '50s was rife with bicycles. Ever since they were my two big “bothers” and I was their little “blister,” our resident boy geniuses used our bikes as a starting point of experimentation. Metamorphosed into four-person bikes, and three- and four-wheeled carts, our bikes were like wheeled Erector sets in their hands.

Self-modeled after two of their heroes, Wilbur and Orville Wright, my two older siblings called themselves the Wrong Brothers. The front face of the hill we lived on was dubbed “Kill Devil Hill” in honor of the place the Wrights made their first flight. Our hill was where we performed test runs of the wheeled contraptions the boys built.

One of the boys would pilot the first test run. If he made it to the creek at the bottom without crashing, we would push the cart to the top of the hill again. Then, all of us would climb on, hanging on wherever we could, to make a second run. This is where the cart would show its true mettle (or not). If it hung together and made it to the creek—with or without us still on board—it was deemed a success. If not, the broken hulk was returned to the garage to be cannibalized—emerging at a later date as a newly reincarnated ride.

Through the years, my brothers’ interest in bicycles never waned. Between the two of them, they still own more than

14 assorted styles of bicycles. Over the last decade, they have been working on a fascinating and very practical project together. Today, a blog chronicles their efforts to perfect a bike that’s time has come, a bicycle that answers the question: “Sure, bikes are good for the Earth and good for my health, but how can you go shopping or carry anything on one?”

My brothers assumed *nom de plumes* for the blog: Ernst “Fritz” Jeinkel and Heinrich “Heinz” Heimer are featured along with our dad, who is referred to as “Gramps.” The Jeinkel-Heimer site does not sell anything—information is power, after all. It’s all about the years they’ve spent designing an ever-better sidecar bike, capable of carrying another person or a load of cargo.

Proto Types

Their first sidecar bike was called Proto I, or “Old Grey.” Fritz took some old bikes and parts to “Victor,” a metalworking friend, and, as he tells it, said, “Could you weld these together so I can put a chair between them?” Victor, in his usual relaxed tone, replied, “Oh, yeah, I could do that, but when I got it done, it would look like crap.” Fritz rephrased his

request. "Victor," he said, "would you consider these parts sacrificial and give me a platform beside my bike that is about 5 inches off the ground, 4 feet long and about 26 inches wide?" To that, Victor replied, "Sure, I could do that."

Old Grey worked right out of the gate, but needed fine-tuning. Fritz and Old Grey worked that summer at a large country fair for the alter-abled crew, ferrying people in wheelchairs from the hot, dusty parking lot. He devised a way to secure a wheelchair onto the sidecar platform. If needed, he could attach a chair so he could transport people without wheelchairs.

One of Fritz's passengers that first year was a young quadriplegic. He used a pointer in his mouth to tap out his words on a keyboard. After Fritz brought him into the fairgrounds from the field that served as the parking lot, he tapped out, "Thanks, that was my first bike ride!" In the mornings before the fair opened, Fritz and Old Grey also made supply deliveries to booths within the fair. Fritz quickly became known as the "sidecar guy."

The success of Proto I spawned Proto II, a.k.a. the White Wizard. A close relative under Fritz and Heinz's sphere of influence took some bikes and parts to a welder and had a sidecar bike made. Without the testing, adjusting, and design process used by Fritz and Heinz, Proto II had some issues. For instance, riding the cycle unloaded was very difficult—the bike always wanted to lean to the left. After some consultation and design correction at Jeinkel-Heimer Central, the White Wizard was ready to go to work. Now, two sidecar bikes transport passengers from the fair parking lot.

With the popularity of Old Grey and the White Wizard, Fritz and Heinz realized the importance of their design and redesign experience. They believe that a bicycle capable of carrying in excess of 500 pounds, two passengers, or long, heavy objects has universal appeal and possibilities that we have only begun to imagine. Thus Proto III, the Blue Ferry, was conceived.

Fritz and Heinz learned to bend tubing so they could control the design process and modify the plans. In the first phase, a sidecar model was assembled from coat-hanger wire and trick photography was used to superimpose the wire frame over the bike (my favorite photo on their blog). This gave them a view of the frame compatibility before bending the tubing.

20/20 Heinz Zeit

Their sidecar bikes already generate quite a stir when they're out and about. Mostly, people are enthusiastic about how a bike like that could fit into their lives: "I could haul my dog/groceries/tools/camping gear."

Having used their sidecar bikes over the past 10 years, the boys have now decided to make available as much information as they have discovered, presenting information on the theory, planning, fabrication, and testing required to produce a sidecar bike. Their blog has step-by-step assembly photos and notes on the Blue Ferry.

The years of practical, real-life use have revealed specific problems that have been corrected. By welcoming comments, questions, and incorporating other people's ideas and experiences, Fritz and Heinz hope to see more sidecar bikes in daily use. Their theory is that the more people communicate information about this mode of transport, the more viable it will become. Their creations embrace the philosophy of reducing fossil fuel use, reusing parts of one thing to make another—and of re-cycling, for the benefit of ourselves and our world.

I guess they're not such big "bothers" after all.

Access

Kathleen Jarschke-Schultze (kathleen.jarschke-schultze@homepower.com) is reintroducing free-range chickens, under the watchful eyes of Ned, the rooster, to her off-grid home in northernmost California.

Jeinkel-Heimer bicycle sidecars by Lifting Bodies • www.jeinkel-heimer.com



SOLAR WATER HEATING

Commercial • Residential
Solar Radiant Floor

26 years
of industry leadership

New Mazdon HP 200 System

Temperature Limited
Condenser

**IT'S ALL IN THE
VACUUM**


- Save up to 80% on Heating bills
- All weather performance
- Low Maintenance

solarthermal.com

zev@solarthermal.com
Call Toll Free
1-888-923-9443
Ask About Dealerships

"SOLAR WAND" HOT WATER KITS

Self-Pressurized, Antifreeze Closed Loop System

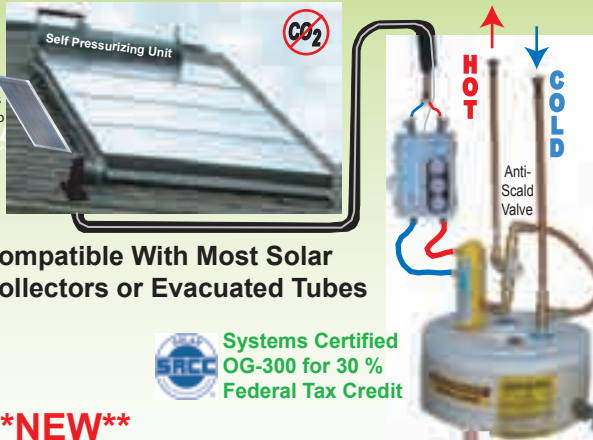

Self Pressurizing Unit

PV Runs Pump

CO₂

HOT

COLD

Anti-Scald Valve

WAND

"Solar Wand" Double-walled heat exchanger screws into your tank

WAND IAPMO Listed

UPC

Systems Certified OG-300 for 30 % Federal Tax Credit

****NEW****

Pump/Fill/Gauge Unit

Jobs

858-259-8895


www.butlersunsolutions.com

BUTLER SUN SOLUTIONS Inc.

Solar Wand

Off Grid? Have flowing water?

Light up your life!

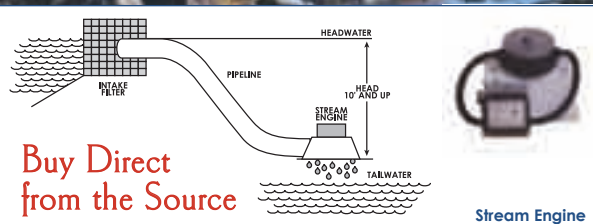

Low head turbine:


- Works with heads of 2 to 10 feet and large flows
- Low flow runner option

Higher head turbine:

- Operates at heads of 10 feet and up
- High output wheel option for heads over 50 feet

Both turbines:

- Use permanent magnet brushless alternators
- Charge 12, 24, 48 Volt batteries or higher voltage for long distance
- Have cast bronze runners
- Generate up to 1KW or more at best sites

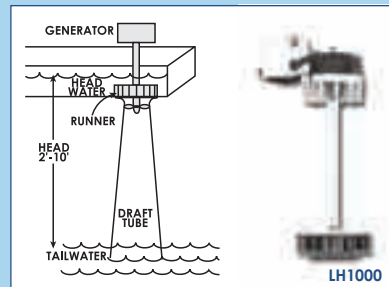

Energy Systems & Design

"Innovative turbines since 1980"

Manufacturing cost-effective water powered generators

For more information:
www.microhydropower.com
 506-433-3151

Specializing in photovoltaic system design of any type.

Call one of our solar design technicians for system design or visit our web store for thousands of renewable energy products.

800-383-0195



NORTHERN ARIZONA
WIND & SUN
 Electricity From the Sun

<http://store.solar-electric.com>
 4091 E Huntington Dr • Flagstaff, AZ 86004
 Providing renewable energy since 1979



Wattsun Solar Trackers

Residential

- Single & Dual-Axis
- Azimuth Trackers mount up to 3 kW of photovoltaic modules.

Commercial

- Fixed-Tilt Azimuth Trackers
- Trackers mount up to 7kW
- Horizontal Linear Axis Trackers
- Over 250 kW of PV per drive
- Engineered for multi-MW PV Power Plants

ARRAY TECHNOLOGIES, INC.
 tel: 505-881-7567
 fax: 505-881-7572
www.wattsun.com

Actively building active solar trackers since 1992
 Wattsun Trackers are manufactured in the USA.




DINGO 20/20
Solar Charge Regulator 12-48V 20A

12, 24, 32, 36, 48V Charge/Load Control
Field Adjustable Charge Regime
Comprehensive LCD Metering
One Year System Data Monitoring
Backup Generator Control
Diversión Control
Second Battery Charging
Wire Cover for Clean Installation
Modular Power Management Compatible
Negative Ground
and Much More!!



Phocos USA
742 E 46th Street Tucson, AZ 85713
Phone: (520) 777-7906 Fax: (520) 844-6316
www.solardingo.com info@solardingo.com


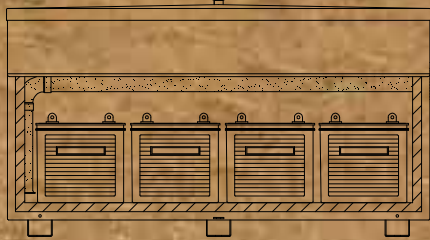


Zomeworks Corporation
Passive Energy Products
Website: www.zomeworks.com
Phone: 800-279-6342
Email: zomework@zomeworks.com

Environmentally and Financially Sustainable:
Do not rely on Hydrocarbons or Tax Credits

Introducing Cool Cell® Tank-Top™ Series


- Affordable For All
- Lowers Maintenance Costs and Extends Battery Life

CCTT-522828
Front Interior View

COME LEARN WITH US!
IN A BEAUTIFUL SETTING WITH AN AFFORDABLE TUITION PLAN -
\$480 OUT-OF-STATE & \$360 IN-STATE*
*PER SEMESTER

YOU WILL COMBINE SCIENCE



WITH HANDS-ON LEARNING



YOU CAN EARN A RENEWABLE ENERGY DEGREE
TWO YEAR A.A.S. DEGREE OR ONE YEAR CERTIFICATE PROGRAMS
FOCUS ON PHOTOVOLTAIC DESIGN AND INSTALLATION
BOTH EMPHASIZE FULL N.E.C. COMPLIANCE

PLEASE VISIT US ONLINE AT www.sanjuancollege.edu/reng

FOR ADDITIONAL INFORMATION ABOUT THE RENEWABLE ENERGY PROGRAM AT SAN JUAN COLLEGE, FARMINGTON, NM
PLEASE CONTACT: TOM MUNSON
(505) 566-3003 OR (800) 241-6327
munsont@sanjuancollege.edu



S-5!™
The Right Way!



Introducing the S-5-PV Kit, a revolutionary new solution to attach solar PV panels to standing seam metal roofs!

Crystalline PV modules mounted with the S-5-PV Kit to a standing seam metal roof produces a reliable long term alternative power source. The patented design of the attachment clamp and attendant round-point setscrews enables an entire installation without a single penetration of the roof's surface! Installation is quick and easy.

To learn more about the S-5-PV Kit, visit us at
www.S-5.com
or call us at
888-825-3432

RE happenings

CALIFORNIA

Jul. 14–16, '09. San Francisco. Intersolar North America. Solar trade exhibition & conference. Market developments & trends, government policies & the latest technology & products. Info: www.intersolar.us

Aug. 8–9, '09. Hopland, CA. SolFest. RE booths, workshops & kids' activities. Food & entertainment. Info: www.solfest.org

Oct. 27–29, '09. Anaheim, CA. Solar Power 2009. Conference & expo. Info: SEIA • 202-296-1688 • www.solarpowerconference.com

Arcata, CA. Workshops & presentations on RE & sustainable living. Info: Campus Center for Appropriate Technology • 707-826-3551 • ccat@humboldt.edu • www.humboldt.edu/~ccat

Carlsbad, CA. PV installation training for NABCEP certification. Info: www.aptc.edu

Hopland, CA. Workshops on PV, wind, hydro, alternative fuels, green building & more. Solar Living Institute • 707-744-2017 • sli@solarliving.org • www.solarliving.org

COLORADO

May 21–24, '09 (Again Jun. 4–7, Jul. 23–26, Aug. 20–23). Solar Heating & Natural Bldg. Design workshop. Info: Crestone Solar School • www.crestonesolarschool.com

Aug. 29–30, '09. Crestone, CO. Crestone Energy & Sustainability Fair. www.joinLAS.com

Sept. 18–20, '09. Fort Collins, CO. Rocky Mt. Sustainable Living Fair. Exhibits, workshops, RE, alternative vehicles & more. Info: • kellie@sustainablelivingfair.org • www.sustainablelivingfair.org

Carbondale, CO. Workshops & online courses on PV, water pumping, wind, RE businesses, microhydro, solar hot water & more. Info: Solar Energy Intl. • 970-963-8855 • sei@solarenergy.org • www.solarenergy.org

FLORIDA

Melbourne, FL. Green Campus Group meets monthly to discuss sustainable living, recycling & RE. Info: fleslie@fit.edu • <http://my.fit.edu/~fleslie/GreenCampus/greencampus.htm>

ILLINOIS

May 2–3, '09. Carbondale, IL. Shawnee Energy Fest. Energy & home improvement fair. Vendors, workshops, speakers, tours & kids' activities. Info: www.shawneeenergyfest.com

Aug. 8–9, '09. Oregon, IL. IL RE & Sustainable Lifestyle Fair. RE booths, workshops, tours & kids' activities. Food & entertainment. Info: www.illinoisrenew.org

IOWA

Sept. 12–13, '09. Cedar Falls, IA. I-Renew Energy Expo. Workshops, exhibits, food, entertainment. Info: www.irenew.org

Iowa City, IA. Iowa RE Assoc. meetings. Info: 319-341-4372 • irenew@irenew.org • www.irenew.org

MASSACHUSETTS

May 18–20, '09. Boston. Alternative Energy & Building Efficiency '09. For retailers of RE & building efficiency products. Info: www.alternativeenergyshows.com

Hudson, MA. Workshops: PV, wind & solar thermal. Intro to advanced. Info: The Alternative

Energy Store • 877-878-4060 • workshops@altestore.com • <http://workshops.altenenergystore.com>

MICHIGAN

Jun. 26–28, '09. Onkama, MI. Michigan Energy Fair. Workshops, exhibits & speakers on solar, wind, alt. transportation & building. Info: www.glrea.org

West Branch, MI. Intro to solar, wind & hydro. 1st Fri. each month. Residential system design & layout. Info: 989-685-3527 • gottter@m33access.com • www.loghavenbbb.com

MISSOURI

Gerald, MO. Workshops on energy efficiency, PV, wind, solar heating & more. Info: Evergreen Institute • info@evergreeninstitute.org • www.evergreeninstitute.org

New Bloomfield, MO. Workshops, monthly energy fairs & other events. Info: Missouri Renewable Energy • 800-228-5284 • info@moreenergy.org • www.moreenergy.org

MONTANA

Whitehall, MT. Seminars, workshops & tours. Straw bale, cordwood, PV, more. Info: Sage Mt. Center • 406-494-9875 • www.sagemountain.org

NEW HAMPSHIRE

Rumney, NH. Green building workshops. Info: D Acres • 603-786-2366 • info@dacres.org • www.dacres.org

NEW MEXICO

Sept. 26–27, '09. Albuquerque. Solar Fiesta. RE & EE exhibits & workshops. Info: (see below)

Six NMSEA regional chapters meet monthly, with speakers. Info: NM Solar Energy Assoc. • 505-246-0400 • info@nmsea.org • www.nmsea.org

NEW YORK

Apr. 24–26, '09. Canton, NY. North Country Sustainable Energy Fair. Workshops, exhibits, food, kids' area. Info: fair@ncenergy.org • www.ncenergy.org

May 12–16, '09. Buffalo. Solar 2009. Conference & exhibition of ASES. Info: www.solar2009.org

NORTH CAROLINA

Aug. 21–23, '09. Fletcher, NC. Southern Energy & Environment Expo. RE displays, exhibits & presentations. Info: www.seeexpo.com

Saxapahaw, NC. Solar-powered home workshop. Info: Solar Village Inst. • 336-376-9530 • info@solarvillage.com • www.solarvillage.com

OREGON

May 1–3, '09. Portland. Northwest Solar & Clean Tech Expo. Workshops, seminars & exhibits on clean energy. Info: www.nwsolarexpo.com

Jul. 24–26, '09. John Day, OR. SolWest RE Fair. Exhibits, workshops, speakers. Info: EORenew • 541-575-3633 • info@solwest.org • www.solwest.org

Cottage Grove, OR. Adv. Studies in Appropriate Tech., 10-week internships. Info: Aprovecho Research Center • 541-942-8198 • apro@efn.org • www.aprovecho.net

PENNSYLVANIA

Sept. 18–20, '09. Kempton, PA. PA RE & Sustainable Living Festival. RE, natural building & sustainable ag; workshops, speakers, exhibits. Info: www.paenergyfest.com

Philadelphia Solar Energy Assoc. meetings. Info: 610-667-0412 • rose-bryant@verizon.net • www.phillysolar.org

RHODE ISLAND

Jun. 6–7, '09. Coventry, RI. RI Sustainable Living Festival & Clean Energy Expo. RE, efficiency & building; workshops, music & exhibitors. Info: www.livingfest.org

TENNESSEE

Summertown, TN. Workshops on PV, alternative fuels, green building & more. Info: The Farm • 931-964-4474 • ecovillage@thefarm.org • www.thefarm.org

TEXAS

Sept. 25–27, '09. Fredericksburg, TX. RE Roundup & Green Living Fair. Exhibits, speakers & workshops on RE, green building, green ag & EE. Info: www.theroundup.org

El Paso Solar Energy Assoc. Meets 1st Thurs. each month. Info: EPSEA • 915-772-7657 • epsea@txses.org • www.epsea.org

Houston RE Group, quarterly meetings. HREG • hreg@txses.org • www.txses.org/hreg

VERMONT

May 11–16, '09. East Charleston, VT. PV design & installation. Hands-on course, incl. site analysis, design, and a system installation. Info: North Woods Stewardship Center • 802-723-6551 x113 • jayson@northwoodscenter.org • www.northwoodscenter.org

Jul. 10–12, '09. Tinmouth, VT. SolarFest. RE workshops, speakers, music, theatre, food & more. Info: www.solarfest.org

WASHINGTON STATE

May 2, '09. Lacey, WA. Lacey Alternative Energy Fair. Info: 360-491-0857 • www.cl.lacey.wa.us/events/updates/lacey_event_b.html

Jul. 18, '09. Shoreline, WA. Shoreline Sustainable Living & RE Fair. Exhibits & speakers. Info: www.shorelinesolar.org

Guemes Island, WA. SEI '09 workshops. Apr. 6–11: Wind-electric systems maintenance & repair; Apr. 13–18: Homebuilt wind generators. Info: See SEI in Colorado listing. Local coordinator: Ian Woofenden • 360-293-5863 • ian.woofenden@homepower.com

WISCONSIN

Jun. 19–21, '09. Custer, WI. RE & Sustainable Living Fair (a.k.a. MREF). Exhibits & workshops on solar, wind, green building, transportation, energy efficiency & more. Home tours, silent auction, Kids' Korral, entertainment, speakers. Info: See MREA listing below.

Custer, WI. MREA '09 workshops: Basic, int. & adv. RE; PV site auditor certification test; veg. oil & biodiesel; solar water & space heating; masonry heaters; wind site assessor training & more. Info: 715-592-6595 • info@the-mrea.org • www.the-mrea.org

Amherst, WI. Artha '09 workshops: Intro to Solar Water & Space Heating Systems; Installing a Solar Water Heating System; Living Sustainably & more. Info: 715-824-3463 • chamomile@arthaonline.com • www.arthaonline.com

Send your renewable energy event info to happs@homepower.com

SUNDA Evacuated Tubes

Aerospace Technology for Solar Water Heating



Affordable vacuum tube collectors for superior performance in all seasons and climates



Domestic Hot Water & Home Heating
Pools & Spas
Commercial / Institutional
Agricultural / Industrial



Sun Spot Solar
PO Box 55
Del Water Gap, PA 18327
570.422.1292
info@ssolar.com / www.sssolar.com

Available nationally through an expanding dealer network. Join our team! Training and technical support provided

The BEST Tool for Solar Site Analysis JUST GOT BETTER!



The original **Solar Pathfinder** with its reflective properties gives an excellent "instant solar blueprint" of the prospective site.

Now, the NEW **Solar Pathfinder Assistant** software, and your digital camera, carry that shading information into a concise, thorough, professional-looking solar site analysis report in just seconds.

Solar Pathfinder Assistant:

automatically adjusts for magnetic declination, latitude, azimuth, tilt angle, & tracking mode (fixed, 1-axis, 2 axis); automatically does yearly energy computations using included NREL data (no internet connection necessary); displays "before/after" results of removing obstructions; and creates professional-looking reports!

Solar Pathfinder ASSISTANT

RAISING THE STANDARD IN SOLAR SITE ANALYSIS

3953 Marsh Creek Road, Linden, TN 37096 • 317-501-2529 • Fax 931-589-5400
info@solarpathfinder.com • www.solarpathfinder.com

Sun Frost

Energy Efficient Refrigerators & Freezers

Customized To Fit Your Needs



- ▶ Available in DC or AC
- ▶ Select From Over 10 Models
- ▶ Choose from 1000's of Colors, Finishes & Woods

"Higher efficiency standards for refrigerators have saved the equivalent of all the energy generated in the US by wind and solar."

Dr. Chu, US Secretary of Energy

Please Contact Us For More Info

P.O. Box 1101, Arcata, CA 95518
tel: (707)822-9095 • fax: (707)822-6213
info@sunfrost.com • www.sunfrost.com



SOLARTECH POWER

OFFERS

OFF-GRID, GRID-TIED SOLAR SYSTEMS

WITH MOUNTING BRACKET.



Solar Panel
MOUNTING
SCREW SET

Our factory produces high quality solar panels of 5W ~ 230W. 210W-230W are on CEC & NSHP list.

IEC   

50W - 120W PRICE AT \$3.80 - \$4.00/W

DEPENDENT ON QUANTITY.

866.777.6527

13811 Bentley Place, Carrizo, CA 90703
Tel: 562-926-1089 Fax: 562-926-1021
E-mail: sales@solartechpower.com

WWW.SOLARTECHPOWER.COM

www.homepower.com

127

marketplace

HYDROELECTRIC SYSTEMS: Pelton and Crossflow turbines or complete AC systems for standalone or grid interconnect operation. Site evaluation and equipment selection assistance. Manufacturing home and commercial size turbines since 1976. Free brochure: Canyon Industries, PO Box 36HP, Deming, WA 98244, 360-592-5552. Email: info@canyonhydro.com Web page: canyonhydro.com • HP13002

FOLLOW THE SUN! Light seeking single and dual axis solar tracker controls. www.theanalogguy.com • HP13003

ECOMALL: The largest environmental portal of earth-friendly companies and resources. Renewable energy companies, news and information. www.ecomall.com. To advertise, call 845-679-2490. • HP13004

XXXXXXX UNI-SOLAR XXXXXXXX
XXXXXXX 64 Watts \$359 XXXXXXXX
M55 Siemens panels \$225. Almost new
1500 AH AGM 12-volts \$1800. TraceX
SW5548 \$2850. Ex 2KW inverter SB \$850.
Buy, sell New/Used • 760-949-0505 •
HP13005

**PORTABLE AND STANDBY
GENERATORS** from Honda, Yamaha,
Subaru, Kipor, and More + Wireless
Remote Start Available. www.hayesequipment.com 1-800-375-7767 •
HP13006

I AM A SOLAR WHOLESALER looking
for retailers to carry my solar electronic,
educational & hobby goods. Phone #
(916) 486-4373. Please leave message. •
HP13007

DC POWERED CEILING FANS: 12 &
24 volts: The Best in the World: RCH
Fanworks • info@fanworks.com
www.fanworks.com PH: 509-685-0535 •
HP13008

EDTA RESTORES SULFATED BATTERIES.
EDTA tetra sodium salt, \$16/lb. plus
\$8 S&H for 1st lb. plus \$10 S&H for
2+ lb. Trailhead Supply, 325 E 1165 N,
Orem, UT 84057, (801) 225 3931, email:
trailheadsupply@webtv.net, info at:
www.webspawner.com/users/edta •
HP13009

HYDROELECTRIC TURBINES: Custom
sized runners 50W-500kW, 82-400mm
diameter, stainless investment castings
and molded plastic, from \$120, site analysis
spreadsheets, www.h-hydro.com • HP13010

WANT TO LIVE RENT-FREE - anywhere
in the world? There are empty homes in
every state and country, and property
owners are looking for trustworthy
people to live in them as property
caretakers and housesitters! The
Caretaker Gazette contains these property
caretaking/housesitting openings in all 50
states and foreign countries. Published
since 1983, subscribers receive 1,000+
property caretaking opportunities
each year, worldwide. Some of these
caretaking and housesitting openings
also offer compensation in addition to the
free housing provided. Short, medium
and long-term property caretaking
assignments are in every issue.
Subscriptions: \$29.95/year. The Caretaker
Gazette, 3 Estancia Lane, Boerne, TX
78006. (830) 755-2300. www.caretaker.org •
HP13011

**HYDROS. P.M. BRUSHLESS DC or
INDUCTION UNITS,** stainless turgo or
bronze pelton. Battery based or Intertie.
From \$1350. www.homehydro.com
707-923-3507 • HP13012

SOLAR THERMAL BUSINESS FOR SALE
Well established, good income, growth
potential, in a beautiful area in the Pacific
Northwest. Will train the right person.
Contact: solar4sale@gmail.com • HP13013

CONTAIN YOUR BATTERIES SAFELY
with vented HDPE box complete with
welded seams and removable lid.
Custom sizes available, UPS shippable.
radiantsolartech.com 707-485-8359 •
HP13014

LED bulbs from CCrane at discount
prices. Many styles available in 12V and
120V. radiantsolartech.com 707-485-8359 •
HP13015

LARGE GAS REFRIGERATORS 12, 15 &
18 cubic foot propane refrigerators. 15
cubic foot freezers 800-898-0552 Ervin's
Cabinet Shop, 220 N County Rd. 425E.,
Arcola, IL 61910 • HP13016

EDTA (tetra sodium salt), \$12/lb. plus
\$8.00 s&h 1st lb. or \$10 for 2-10lbs.
Northern Michigan 1-231-548-5482 or
dpretzer@centurytel.net • HP13017

HYDRO POWER OF YOUR OWN!
Ideal 1.38 acres including pond, dam
with year-round flow, 2 sluiceways,
and existing waterwheel. Site of
historic mill/residence lost to fire.
Endless possibilities. Call for details.
Sutton Group Northumberland Realty
705.924.9230 mls 90080 • HP13018

**\$159K 10 ACRES, 2K SOLAR, LARGE
HOME AND HUGE BARN.** High desert 90
min from downtown LA. (661)349-6114.
<http://s383.photobucket.com/albums/oo274/dezertdon> • HP13019

**UNIQUE LAKEFRONT LIVING ON
THE OREGON COAST!** "Escape the
Ordinary." Spectacular location on
Booth Island in Siltcoos Lake. Custom
homes and large parcels. Off the grid.
www.boothisland.com. 541-999-2336 •
HP13020

**ARE YOU A SOLAR INSTALLER THAT
NEEDS MORE BUSINESS?** We provide
customer referrals nationwide from
people looking for PV, thermal and
pool heating solutions for their home
and business. Starting at just \$24.95,
all our referrals go thru an extensive
QC process including validation
by our Colorado call center. Visit
CleanEnergyAuthority.com/homepower
or call (800) 456-9876 • HP13021

**AMAZING 40 ACRE SUSTAINABLE
HOMESTEAD** 10 miles south of Crested
Butte, CO. www.crestedbuttefarm.com.
Call Nancy at (970) 641-4742 for more
information. • HP13022

Marketplace Advertising

Rates: \$2.50 per word. \$50
minimum per insertion,
paid in advance of publication.
Submit your ad to marketplace@homepower.com
or call 800-707-6585.

Off-Grid Solar Energy Specialists

We'll help you through the confusion with the best design and components for your off-grid installation.

- 8+ years solar installation experience
- Full support for do-it-yourselfers
- Wiring diagrams for your system
- Packaged systems available

**We Carry
all Major
Brands**

Apex Solar

We can build it—you can install it.

toll-free: 888-782-0706

www.apxsolar.com

BZ Products Model MPPT500

500 watt 45 amp Maximum Power Point Solar Control

- Boost charge current up to 30%
- Up to 45 amp output current
- Microprocessor control
- 95% efficient
- 500 watt PV input
- Universal PV input 12 to 48 volts
- 12, 24 or 48 volt output
- Digital metering
- PWM float control
- Battery temperature sensor standard
- Five year warranty
- Made in U.S.A.



BZ Products, Inc.

314-644-2490 • www.bzproducts.net • bzp@bzproducts.net
7914 Gravois, St. Louis, MO 63123, USA

JWP- Jan Watercraft Products

Finally- We Can Service Big Batteries!

You have been waiting... We now have "Battery Watering Kits" for large solar batteries including Rolls-Surrette series 4000 and 5000, Hup Solar One, and most others with a bayonet style cap or a 8D with .75 press in cap. Our valve design guarantees that water levels will be maintained at the precise required water level. Visit our web site to see **ALL** of these applications.

Free shipping in USA. Dealers Wanted!



Distributed by: JWP

E-mail: sales@janwp.com

Call Bob- 1-616 822-7587



www.janwp.com

HYDROSCREEN CO. LLC

- Self Cleaning
- Easy Installation
- High Capacity
- No moving parts
- Pipe, ramp and box mountings

**Precision Wedge Wire
Coanda Screens**
for Hydro, Agricultural, and
Domestic Diversions from
10 gpm to 500 cfs

- We specialize in creatively engineering solutions for your unique hydro diversion screening needs.
- Our solutions are cost effective with numerous screen mounting options; we also have durable 304 SS mounting boxes.

Visit us at www.hydroscreen.com
or call (303) 333-6071
e-mail: RKWEIR@AOL.COM
We don't just sell screens,
we engineer solutions!



GeoBulb LED UNDER CABINET LIGHT BARS



Soft White
or
Cool White

- Ultra-Slim 9/16" Profile and Energy Efficient Light
- 12-Inch Bar Draws Only 2.4 Watts, Replaces 15 Watt Bar
- Daisy Chain up to 11 Bars with 1 Adapter
- Lasts up to 30,000 Hours • 3-Year Warranty

Easy Install with included Connectors, Screws or Double-Stick Tape
120 Volt or Your 12V System

C.CRANE 800-522-8863 • geobulb.com

AEROSTAR 6 Meter Wind Turbine

10 kW
Direct Utility Interface
No Inverter
25 Year Track Record
Simple, Reliable, Quiet
Affordable

www.aerostarwind.com - 508-636-5200

installers directory

For more information or to get your business listed in *Home Power's* Installers Directory, e-mail advertising@homepower.com or call 541-512-0201.

Arizona



C & R Solar Quality design, sales and installations of solar/wind power systems to meet your application. Serving northwest Arizona since 1989 for remote homes and grid tied systems. Living off grid since 1980. We achieve customer satisfaction with over 25 years of experience in renewable energy. ROC135882. 928-757-7059.



EV Solar Products, Inc. Licensed solar professionals since 1991. We design and install solar electric and hot water systems for grid-tie and remote homes. Visit our retail showroom just north of Prescott at 2655 N US Hwy 89. Chino Valley, AZ 86323 ROC Licenses: 129793/118299. 928-636-2201.



Generator Solar & Wind Power Systems Design, Sales, installation & maintenance. Off-grid & grid-tied, prime power or back-up. Complete systems, hybrid systems, or sub systems & components. We can do it. Covering all of Arizona & dedicated to helping all present & potential customers. License # ROC203166, 928-300-4067, altpwrsys@hotmail.com



IDC Solar Exclusive products like the Guy-wireless Towers, Modular Wiring Unit and Automatic Battery Watering System for code compliant, worry-free hybrid renewable energy systems. We install locally or nationally. Complete licensing for all residential and commercial devices. Skystream turbines & towers up to 50' now available. 928 636-9864 or idcllc@northlink.com • www.idcsolar.com

Arkansas



Rocky Grove Sun Company has been serving NW Arkansas and the surrounding region since 1986. Design, installation and consultation with two NABCEP certified installers: Flint Richter and Jimis Damet with over 35 years combined experienced in PV stand alone & grid-tied, wind and hydro. Located in the heart of NW Arkansas Ozarks. Contact us at 479-665-2457 or info@rockygrove.com www.rockygrove.com

California



Acro Electric is a full service electrical contractor specializing in solar power. We provide turn-key solutions for PV, standby power, LED lighting, and more. Approved by the League of California Homeowners (www.homeowners.org) & Better Business Bureau (www.midcalbbb.org). Free site analysis & brochure. (866)711-ACRO • www.acroelectric.com Quality installations backed by 32 years electrical experience.



Apex, Apex Solar Specializing in residential off grid and remote commercial solar power. We provide system design, sales and turn key installation. For do-it-yourselfers, we can help with wiring diagrams and 10+ years of off grid experience. Licensed contractors in California call us toll free at 888 782-0706 or visit us at www.apxsolar.com



Electron Connection Licensed in CA and Oregon. NABCEP Certified installer. Serving northernmost California and southern Oregon. PV, wind, microhydro installs. 800-945-7587 email: bob-o@electronconnection.com, www.electronconnection.com CA Lic. #613554



Independent Energy Systems, Serving the Santa Cruz/Monterey Bay Area. We specialize in design, installation and sales of residential/commercial PV systems. Our mission is to provide our friends in the community an opportunity to become part of the future in renewable energy. We are based in Santa Cruz, we love what we do and it shows in our work! Ph: 831-477-0943 or visit www.iesolar.com

Colorado



Eco Depot USA Specializing in education, design, sales and installation of solar electric, solar thermal and wind systems. Committed to providing professional service for residential, commercial, agricultural and school projects. Started in 1995, under EcoBuilders.com, a sustainable building company, and living with solar since 1989. 719-539-6000, 877-ECO-DEPO www.EcoDepotUSA.com



Namaste Solar • Transforming Energy. Transforming Business. Namasté Solar works in Colorado to propagate the responsible use of solar energy, pioneer conscientious business practices, and create holistic wealth for our community. With over 3 MW installed since 2005, we maintain exceptional standards of environmental stewardship, customer satisfaction, and community philanthropy. 303-447-0300 • NamasteSolar.com



Solar Solutions Ltd. provides photovoltaic, wind & hybrid power systems & components for stand alone systems, grid tied, RV's & remote water pumping. Committed to providing the highest quality service & customer satisfaction. A proud member of Colorado SEIA and a lifetime member of the Colorado RE Society and ASES. Xantrex Certified Dealer. 888 44solar or 888-447-6527 www.solarsolutions.com

Connecticut



Sunlight Solar designs and installs turn-key commercial and residential solar electric systems for your convenience. We are a certified installer under Connecticut, Massachusetts, New York and Rhode Island solar programs, and we're the proud recipient of SunPower's Intelephant Award in 2008! Call (203) 878-9123 or visit www.SunlightSolar.com to schedule a FREE site survey!

Delaware



CMI Electric Inc. Professional design, installation, service and sales of high quality solar electric, wind power and hot water systems in the tri-state area since 1998. NABCEP certified installer, Master Licensed Electricians in DE, PA and MD. Turnkey renewable and conservation solutions, we even sell your RECS! www.cmielectric.com (302) 731-5556

Dominican Republic/Haiti



E&M Somos Services C.x.A. Since 1996, servicing the DR and Haiti areas, specialize in designs, engineers & professionally installs turn-key PV systems for Grid-Tied (Country Rebate & Net Metering), Off-Grid and Water pumping applications, residential to industrial. (809) 472-3247 somoservices.net. Licensed Electrical Contractor. C.15396. HABLAMOS ESPANOL

Florida



Allsolar Service Company Inc., Allsolar is a Florida based design-build solar contracting firm specializing in solar pool heating, solar water heating, and solar electric systems for residential, commercial and industrial applications. Free Estimates. Harnessing the sun's energy since 1974. www.allsolarflorida.com 1-888-6solar-1 CVC056657 Joshua Bessette



Atlas Solar Innovations, 877-299-SOLAR/www.atlas-solar.com Solar Equip. Distributor, Florida- Lic.Solar/Roofing Contractor/PV/Solar H. Water/Solar Pool Heating/Energy/Site Survey/Design/Eng./Permitting/Installation/Incentives/Roof Assessment/Warranty/Insured/W. Comp/FSEC Approved Systems/Miami Dade Approved systems LIC #CVC56733 LIC #ER0015201 LIC #QB0001570, CC#000016332, CCC1326337 tr@atlas-solar.com



ECS Solar Energy Systems (tel) 352-377-8866 www.ECS-solar.com / tom@ECS-solar.com We service FL, the Caribbean and the Southeastern U.S. FL's first solar contractor since 1977. Solar pool heating, hot water, and electric systems –commercial & residential. Solar lic. # CVC056643 Florida state certified for "grid-connected" systems. Contact us now to receive a free solar informational booklet.

Florida, cont.

RE SOLAR AND GENERATOR .COM

Michael Fink Electrical Inc. licensed/insured/bonded. Electrical contractor specializing in design, sales, and quality installation services for grid-tie PV systems and home standby generators. Serving Lee and Collier counties in southwest Florida. Dealer for Guardian generators, Aesolar, Sunwise. Visit www.resolarandgenerator.com 239-218-2280, 239-282-5721, er13012717



Solar-Fit is one of Florida's oldest active solar contractors. Established in 1975, International Sun Protection, Inc. (dba Solar-Fit), has helped over 8,000 families and businesses "Plug into the Sun". Call (386) 441-2299 for FREE information on solar electric, solar pool and solar hot water systems, and solar attic fans, or visit us on the web at www.solar-fit.com State Certified Solar Contractor #CVC56690.



Solar-Ray, Inc. Florida's premier photovoltaic system designer and integrator. 100% customer satisfaction. Commercial, Residential, straight Grid-Tied, Grid-Tie with backup, Stand Alone systems and DC systems. 7+ years of Photovoltaic's experience with over 200 systems operating at or above rated power. NABCEP, FSEC and SMA Certified 407-443-4404. www.solar-ray.net

Idaho



Creative Energies Powerful solutions for your energy needs. NABCEP certified, electrical contractor. Sunpower dealer. All major brands. Consulting, design, sales, & installation for commercial & residential projects. Specialize in photovoltaic & small wind systems both on & off grid. Let us custom-design a system that meets your needs & budget. 208-354-3001 info@creativeenergies.biz • www.creativeenergies.biz

Illinois



PrairieLand Wind and Solar A full service renewable energy company offering consultation, design, finance, and installation. Located in Central Illinois but offering nationwide service. Visit www.prairielandwindandsolar.com to view our farm/business powered by a 10kw wind turbine and 12kw of solar panels. Put your trust in us, you will not be disappointed. Ph. 217-864-2525.

Kentucky



Solar Energy Solutions offers full-service design, consultation, and installation for renewable energy projects in KY, OH, IN, and surrounding states. We install off grid to on-grid—residential to industrial. Employees maintain NABCEP PV and Solar Thermal certifications. Fully licensed and insured. Visit www.solar-energy-solutions.com or call 859-312-7456.

Maine



Benchmark Solar PV and solar thermal solutions from design through construction for residential and commercial buildings. NABCEP PV Installer's Certification; Master Electrician licensed in Maine, NH, and MA. Master Plumber/Heating license. Grid-tie, off-grid, hot water and space heating applications. We also serve the island communities. Call 1-800-9SOLAR1 (976-5271) www.benchmarksolar.com

Maryland



Standard Solar Inc., serving Montgomery and Frederick Counties, Maryland, Northern Virginia, and Washington, DC. since 2004. Specializing in residential solar electric installations. Visit our Website: www.standardsolar.com. 202 Perry Parkway #7, Gaithersburg, Maryland, 20877. Tel. 301-944-1200; email: metrodc@standardsolar.com

Massachusetts



JV Mechanical Contractors, Inc. Licensed in MA & CT. A premier full service company specializing in high quality solar thermal systems & wood gasification boilers. Committed to providing our residential & commercial customers with the highest quality service & customer satisfaction. Please contact us today for your evaluation! 508-943-3222 • info@jvmec.com • www.jvmec.com



Nexamp, Inc. is a full service clean energy solutions company for homeowners, businesses & government clients. Nexamp specializes in solar, wind, geothermal, & energy efficiency. Nexamp performs site assessments, financial analysis, design, permitting, installation & maintenance services. Learn more about how Nexamp can make clean energy simple & profitable for you at 978-688-2700 or at Nexamp.com

Minnesota



Sun Energy CMC. Providing alternative renewable energy solutions for 14+ years! We design, sell, install, and maintain solar PV, solar thermal, & wind energy systems - grid-tie/stand alone, residential/commercial. NABCEP Certified Installer. Grey-water recycling systems & wood/corn boilers. Live responsibly! Live green! Call: 320-679-0877 Email: sales@sunenergyusa.com • www.sunenergyusa.com

Montana



Oasis Montana Inc. designs and sells renewable energy power systems in North America and also offers efficient and LP gas appliances. Call to discuss your project. 877-627-4768 or 4778. Web sites: www.oasismontana.com, www.grid-tie.com, www.PVsolarpumps.com, www.LPappliances.com, www.eco-fridge.com, E-mail: info@oasismontana.com

New Mexico



310 Solar, LLC. New Mexico's premier, award winning solar provider. A full service comprehensive sales and installation contractor, supplying leading edge solar technology in photovoltaic and thermal heating to commercial and residential customers. Fully licensed and certified, MM, GB, EE. References provided. Contact us @ (505)-822-9200 or visit www.310solar.com.



DPW Solar designs, engineers, and professionally installs turn-key solar electric systems for remote or grid-tied homes, commercial facilities, telecommunication and water pumping applications. NABCEP Certified Electrical Engineers and Licensed Master Electrician have over 30 years experience and also live on Solar PV. References available. 800-260-3792 www.directpower.com



Positive Energy, Inc. High quality residential and commercial solar electricity systems. Grid-tied, off-grid, and battery backup systems. Licensed, bonded, insured electrical contractors serving NM since 1997. Five owners are NABCEP certified installers; five members live on solar power; +E is carbon neutral. (505) 424-1112 info@positiveenergysolar.com www.positiveenergysolar.com



Solar Ray SolarRay.com Complete Solar Electric Systems for off-grid, grid-tie, and grid-tie with battery backup. Turn key installations to DIY. Also offer Electric Vehicles. Licensed, bonded, & Insured Electrical contractor. 2 NABCEP certified installers on staff. Serving New Mexico and Colorado for over 10 years. ray@solarray.com, (575) 737-9553, www.solarray.com



Valverde Energy: Putting the Sun to Work for You! Specializing in high quality turn-key solar thermal & pv systems. We install, maintain & troubleshoot for residential & commercial, new & existing (retrofit) construction. Professional, NABCEP certified installers, licensed, bonded, & insured. Excellent customer service. References available. Taos: 575-751-0060; Santa Fe: 505-466-8000. info@ValverdeEnergy.com; www.ValverdeEnergy.com

New York



AY Solar Owner Andy Young NABCEP Certified Solar PV Installer™, located in southern tier of NY State. NYSERDA eligible installer since 2004. On-grid, off-grid, & battery backup systems serving central and western NY. 607-760-8176 info@ay-solar.us • www.ay-solar.us

North Carolina



Alternative Energy Concepts, Inc is a professional full service design and installation company. With a focus on PV, solar hot water heaters and small wind turbines, we strive to maximize our customer's investment and maintain their enthusiasm by providing quality, care and fair pricing. Financing available. www.alternativeenergync.com or call 910-423-7283, fax 910-485-4879.



Argand Energy Solutions is a licensed, full-service provider of solar PV, solar hot water, & wind system design and installation. Lead installer Chris Salmon NABCEP Certified Solar PV Installer®, NABCEP Certified Solar Thermal Installer®; residential, commercial, government customers in NC, SC, GA. Visit www.argandenergy.com or call (877) 939-9599, info@argandenergy.com

Ohio



REpower SOLUTIONS: Northeast Ohio's renewable energy provider for home & business. Design & professional installation of solar PV & wind systems. Home energy ratings & small commercial energy audits. Erika Weliczko - NABCEP Certified Solar PV Installer, OH LIC #44844, Certified Home Energy Rater WEB: www.repowersolutions.com, EMAIL: power@repowersolutions.com PHONE: 216-402-4458



Third Sun Solar & Wind Power, Ltd. Ohio's premier solar and wind power contractor. Complete design and installation of utility tied or off-grid systems for OH and surrounding states. Serving commercial and residential customers. NABCEP Certified PV Installer committed to excellent customer service & the highest quality systems. www.third-sun.com 740 597-3111.

Oregon



Cascade Sun Works, a leading renewable energy contractor in Central Oregon, offers innovative products and cost-effective engineered solutions suited to your energy needs. We provide Solar Thermal and PV installed systems, pre-packaged kits, service and engineering. Licensed and certified. Visit www.sun-works.com or contact us at (541) 548-7887 CCB #151227



Electron Connection Licensed in CA and Oregon. NABCEP Certified installer. Serving northernmost California and southern Oregon. PV, wind, microhydro installs. 800-945-7587 email: bob-e@electronconnection.com, www.electronconnection.com OR CCB# 149724



Sunlight Solar Energy is Oregon's only SunPower Premier Dealer! We provide the highest quality system design and turn-key installation of grid-tied solar electric, solar hot water, radiant floor, and pool heating systems for homes and businesses throughout Oregon. Energy Trust Trade Ally. CCB#158922. Phone: 541-322-1910 or visit us at www.SunlightSolar.com



Trinity Electrical Contractors Corp. A full service licensed electrical contractor specializing in PV and Wind system design and installs. Serving all of Central Oregon. We are proud to be an Energy trust of Oregon Trade Ally. Call 541-923-0556 or visit us at www.trinityelectric.org

Pennsylvania



Belmont Solar A full service licensed solar contractor specializing in PV and solar hot water. Complete design and installation services. Located in Lancaster County PA. Servicing PA, MD, DE & NJ. Visit: www.belmontsolar.com call: 717-768-7796 Where quality workmanship comes standard.



SunGenuity is a brand of SECCO, Inc. We are a full service and licensed solar contractor specializing in Hot Water & PV. Complete design and installation services. Servicing Greater Harrisburg Area & Cumberland Co. We service residential and commercial customers. Visit www.SunGenuity.com • Call us at 800-730-2142 • Email us info@SunGenuity.com

South Carolina



Argand Energy Solutions is a licensed, full-service provider of solar PV, solar hot water, & wind system design and installation. Lead installer Chris Salmon NABCEP Certified Solar PV Installer®, NABCEP Certified Solar Thermal Installer®; residential, commercial, government customers in NC, SC, GA. Visit www.argandenergy.com or call (877) 939-9599, info@argandenergy.com

Tennessee



LightWave Solar Electric, LLC provides design, consultation, and installation of solar electric systems throughout TN and southern KY. We are NABCEP certified, a licensed electrical contractor, and the leading PV Installer in the Nashville area. Quality installations of sustainable, renewable, PV systems. Visit us at www.lightwavesolarelectric.com or call (615) 941-4786

Texas



North Texas Renewable Energy Inc. North Texas' premier solar and small wind energy service. Complete system design and installation. Available service contract Independence-Reliability-Conservation. Jim Duncan answers@NTREI.com 817-917-0527

Utah



Alternative Power Systems, Inc. is Southern Utah's premier Designer & Installer of renewable energy systems. We provide design, sales, installation & service of Solar Power, Solar Hot Water, Wind & Back-up Generators. We are the region's only NABCEP certified. We are insured & licensed in Utah #6259909-5501 And Nevada #0068796. Compare our prices. www.apssolar.com 435-586-9181



Solar Unlimited Energy & Homes, Inc. Serving Southern Utah, Eastern NV and Northern AZ since 1998. Providing sales, service and installation of all your alternative energy needs, including PV, Wind, Net-Metering, Off-Grid, Batteries and Generators. We are also an Authorized Xantrex Service Center. Licensed & Insured. Call toll free 866-solar99 or visit www.solarunlimited.net

Vermont



Independent Power LLC Serving Northern Vermont and New Hampshire with PV and SDHW design, sales and installation. NABCEP certified owner David Palumbo has built over 300 off-grid and grid tied systems since 1988. Outback Certified Dealer. 462 Solar Way Drive, Hyde Park, VT 05655 1-802-888-7194 www.independentpowerllc.com • info@independentpowerllc.com

Virginia



Dunimis Technology Inc. Providing alternative energy systems since 1992. We specialize in the more demanding off-grid as well as grid-tie solar power systems for up-scale homes and institutions. Please visit our new retail energy store and solar equipment center located halfway between Charlottesville and Richmond. For directions call 804-457-9566, pvforyou.com, jryago@netscape.com



Virginia Renewable Energy A division of Schulz Homes Corp has been serving Northern Virginia since 1987. We specialize in building Hybrid Homes using Renewable Energy Systems, including grid-tied Solar PV. We also retrofit Solar PV to existing homes and businesses. 5 N. Hamilton St., Middleburg, VA 20017. Learn more at www.schulzhomes.com/solar. Email: info@schulzhomes.com. Call 540-687-3367

Washington



SolarWind Energy Systems, LLC P.O. Box 1234, Okanogan, WA 98840 509-422-5309 www.solar-wind.us WA Cont. # SOLARES983RQ. Serving Eastern WA & Northern ID grid-tied & off-grid RE systems. Solar PV, wind, solar hot water, remote stock watering. Design, installation, service, maint. Solar Energy International (SEI) trained. Lic. & bonded. bclark@solar-wind.us or jmartin@solar-wind.us



Western Solar Inc., designs & installs solar electric, solar hot water, solar space heating & wind power systems for residential & commercial clients throughout Washington. Renewable energy will save you money, add value to your home or business, & reduce greenhouse gas emissions. 360-746-0859, www.westernsolarinc.com, email: info@westernsolarinc.com

Wyoming



Creative Energies Powerful solutions for your energy needs. NABCEP certified, electrical contractor. Sunpower dealer. All major brands. Consulting, design, sales, & installation for commercial & residential projects. Specialize in photovoltaic & small wind systems both on & off grid. Let us custom-design a system that meets your needs & budget. 866-332-3410 info@creativeenergies.biz • www.creativeenergies.biz



SunPower Energy Casper, WY. Design, installation & service to comply with regulatory requirements. Grid-tied & off-grid systems. Solar electric & hot water, wind turbines. Authorized dealer for Sanyo & Day4 panels, Fronius & Outback inverters, Southwest Windpower & Skystream wind turbines, Surrette batteries. Financing available. 307-262-4647; fax 307-235-2525 • sunpower@bresnan.net

Windmax
 Wind Generator Magnets
 and Accessories

Windmax Wind Turbines
 Add to your collection of Windmax Wind Turbines

WINDMAX
 Wind Generator Magnets
 and Accessories

Higher Efficiency & Higher Output and More Energy

- 1. Superior performance & reliability due to the use of the best materials
- 2. Patented design & construction for maximum efficiency
- 3. Electronic control system for maximum power output
- 4. Durable construction & design for long life
- 5. Integrated with a high quality controller to protect the system from all conditions

One Stop Shop for Wind Generators, Wind Turbine Parts, Magnets and Accessories

BZ Products Model MPPT250

250 watt 25 amp Maximum Power Point Solar Control

- Boost charge current up to 30%
- Up to 25 amp output current
- Microprocessor control
- 95 % efficacy
- 250 watt PV input
- 12 to 24 volt input
- Digital metering
- PWM float control
- Battery temperature sensor standard
- 15 amp low voltage disconnect standard
- Aux battery trickle charger standard
- Five year warranty
- Made in U.S.A.



BZ Products, Inc.

314-644-2490 • www.bzproducts.net • bzp@bzproducts.net
 7914 Gravois, St. Louis, MO 63123, USA



solar powered
DIFFERENTIAL TEMPERATURE
CONTROLLER

Improves the performance
 of solar heating systems
 For 12 or 24 Volt DC pumps

\$85.00

DEALERS
 WELCOME

www.ArtTecSolar.com

Grow Lights The Future is GREEN

[LED SGROWING GREEN.com](http://LEDSGROWINGGREEN.com)

John & Carol Sousa
 Phone: 541.867.4948
 Mobile: 541.961.3572
sales@ledsgrowinggreen.com



**Local & Remote Monitoring
 & Data Logging**

For **BERGEY** Excel-S &
WINDPOWER GridTek-10

www.RightHandEng.com (425) 844-1291

Power Planted LLC
 (805) 667-2142

Wind and solar products
 for the Do-It-Yourselfer



- Electronic Controls
- Free Info and Plans
- Technical Support
- Fast Shipping

www.powerplanted.com

• Simmons •
Natural Bodycare
simmonsnatural.com
 MAKING
 EVERYDAY
 SPECIAL
 Off the grid since 1982

WORKING TOWARD A SUSTAINABLE FUTURE •

HANDCRAFTED SOAPS & BASIC BODYCARE

Terrapin Wind and Solar Co.
 #1 Renewable energy online store
 Call us at (928) 337-2600

www.terrapinsolar.com
 Together we'll light up the world!!!

User Friendly Hydro Power

Alternative Power & Machine

Now Featuring Permanent Magnet Alternators



4040 Highland Ave. Unit #H • Grants Pass, OR 97526 • 541-476-8916


altpower@grantspass.com

www.apmhydro.com

Break Free From the Pump

Enjoy the benefits of driving electric and declare independence from expensive foreign oil.

For more info, join the Electric Auto Association at electricauto.org

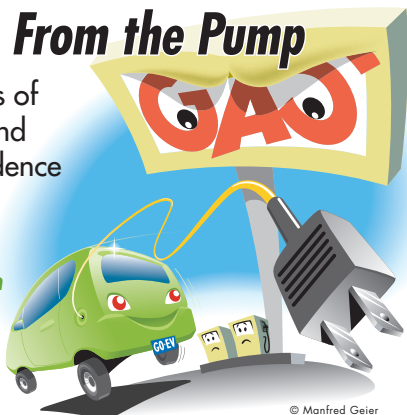

© Manfred Geier

Free Help for our XW System Clients

Including loan of this \$450 tool



Call Toll Free:
800-222-7242
www.abrahamsolar.com



Escuela de Energía Solar

CURSOS Y TALLERES DE ENERGÍAS RENOVABLES

- Sistemas Fotovoltáicos
- Generadores Eólicos
- Calentadores Solares
- Construcción Natural

Información en : <http://www.escueladeenergiasolar.org/>
Teléfonos : (510) 991-7473 (US)
(646) 174-4698 (México)

Rancho Pino Colorado, Sierra Juárez - Ensenada B.C. México

Things that Work!
Model 4-1850
Home Power #67

Digital Power Meters

20-CTR: Measures AC Power up to 10 kW, 100-250 vac single or two phase.
New USB plug in meter, up to 1 gig of flash memory!

ONEMeter: Standard Features include Multiple AC or DC power channels, PC interface, internal logging. Options include Web Interface, Weather Monitoring, and lots more.

4-1850WX: Special meter for Refrigerator Replacement Programs. Detects Defrost Cycle, displays cost/kWh-hrs/yr. Other Models available. Check our website or call for details.

All products are California CEC eligible meters

Ordering or Information call
(269)-365-7744
www.brandelectronics.com

Brand Electronics
info@brandelectronics.com

SOLAR, PV PANELS RECONDITIONED



Best price under the sun, guaranteed, wholesale and retail prices available. Many in stock for immediate shipping or pick up.

Mounting racks and other equipment also available.

Go to web site and click on the "Products" tab for spec sheets and details.

Ph: 530-478-0996 (Sacramento, CA area)
www.pacificrenewablesgroup.com/products
Email: amb@pacificrenewablesgroup.com

New!
Product

"NATURE'S HEAD" COMPOSTING TOILET

- No Odor
- Compact
- Urine Diverting
- Exceptional Holding Capacity
- All Stainless-Steel Hardware

This user-friendly, economical and aesthetically pleasing composting toilet is great for

- Homes
- Boats
- RV's
- Cabins
- Workshops
- Etc.



www.sustainablechoice.net • 248-844-7148

FreeFuelForever.com

Solar Water Heaters-Vacuum Tube
Superb Quality, Super Performance

604 740 9864 Canada

417 818 6057 USA

Dealer inquiries welcome

604 796 2649

info@freefuelforever.com

AAA Solar Supply, www.aasolar.com	116
Abraham Solar, www.abrahamsolar.com	134
Abundant Renewable Energy, www.abundantre.com	80
AEE Solar, www.aeesolar.com	31
Aerostar Inc., www.aerostarwind.com	129
Affordable Solar Group, www.affordable-solar.com	10/11
AltE, www.altestore.com	14/15
Alternate Energy Technologies LLC, www.eaglesunsystem.com	43
Alternative Power & Machine, www.apmhydro.com	134
Ampair, www.ampair.com	34
Apex Solar, www.apxsolar.com	129
Apollo Solar, www.apollosolar.com	51
Apricus Solar Co. Ltd., www.apricus.com	16
APRS World LLC, www.winddatalogger.com	119
ART TEC, www.arttec.net	133
Backwoods Solar Electric Systems, www.backwoodssolar.com	35
Bernt Lorentz GMBH & Co. KG, www.lorentzpumps.com	3
Bogart Engineering, www.bogartengineering.com	117
Brand Electronics, www.brandelectronics.com	117, 134
Butler Sun Solutions Inc, www.butlersunsolutions.com	124
BZ Products, www.bzproducts.net	129, 133
C Crane Co., www.ccrane.com	129
Conergy Inc., www.conergy.us	2
DC Power Systems Inc., www.dcpower-systems.com	19
EasyFlex, www.easyflexusa.com	50
Electric Auto Association, www.eaaev.org	117, 134
Electro Automotive, www.electroauto.com	116
Electron Connection, www.electronconnection.com	101
Energy Systems & Design, www.microhydropower.com	124
Enphase Energy, www.enphaseenergy.com	65
Escuela de Energia Solar, www.escuelaenergiasolar.org	134
Free Fuel Forever, www.freefuelforever.com	134
Fronius USA LLC, www.fronius-usa.com	BC
Fullriver Battery USA, www.fullriverdcbattery.com	94
groSolar, www.grosolar.com	4
Harris Hydro, 707-986-7771	121
Heliodyne Inc., www.heliodyne.com	37
Heliotex, www.heliotex.com	33
Hydrocap Corp., 305-696-2504	113
Hydroscreen Co. LLC, www.hydroscreen.com	129
Innovative Solar Inc., www.innovativesolar.com	110
Intersolar, www.intersolar.us	120
Jan Watercraft Products, www.janwp.com	129
Kaco Solar Inc., www.kacosolar.com	36
LEDS Growing Green, www.ledsgrowinggreen.com	133
Liberty Enterprises Inc., www.iloveebikes.com	117
Magnum Energy, www.magnumenergy.com	27
Maverick Solar, www.mavericksolar.com	121

MidNite Solar Inc., www.midnitesolar.com	89
Midwest Renewable Energy Assoc., www.the-mrea.org	95
Mitsubishi Electric, www.mitsubishielectricsolar.com	44
MK Battery, www.mkbattery.com	73
Morningstar Corp., www.morningstarcorp.com	32
Northern Arizona Wind & Sun, www.solar-electric.com	124
Northwest Energy Storage, www.solaronebatteries.com	104
Northwest Solar & Clean Tech Expo., www.oseia.org	112
OutBack Power Systems, www.outbackpower.com	8/9
Pacific Renewables Group, www.pacificrenewablesgroup.com	134
Phocos USA, www.phocos.com	125
Power Battery Co. Inc., www.powerbattery.com	83
Power Planted LLC, www.powerplanted.com	133
Ready Reserve Foods, www.readyreservefoods.com	105
RightHand Engineering, www.righthandeng.com	133
S-5!, www.s-5.com	125
San Juan College, www.sanjuancollege.edu/reng	125
Silicon Solar, www.siliconsolar.com	88
Simmons Natural Bodycare, www.simmonsnaturals.com	133
SMA America Inc., www.sma-america.com	21
Solar Converters Inc., www.solarconverters.com	111
Solar Depot Inc., www.solardepot.com	IFC/1
Solar Energy International, www.solarenergy.org	81
Solar Pathfinder, www.solarpathfinder.com	127
SolarTech Power Inc. www.solartechpower.com	127
SolarWorld California, www.solarworld-usa.com	57
Solectria Renewables, www.solren.com	17
Steca Elektronik GmbH, www.stecasolar.com	110
Stiebel Eltron Inc., www.stiebel-eltron-usa.com	45
Sun Frost, www.sunfrost.com	127
Sun Pumps Inc., www.sunpumps.com	113
Sun Spot Solar, www.sssolar.com	127
SunDanzon, www.sundanson.com	121
SunWize Technologies, www.sunwize.com	29
Surrette Battery Company Ltd, www.rollsbattery.com	IBC
SustainableChoice.net, www.sustainablechoice.net	134
Terrapin Wind and Solar Co., www.terrapinsolar.com	133
The Taunton Press, www.taunton.com/Green	111
Thermomax, www.solarthermal.com	123
Trina Solar Ltd., www.trinasolar.com	5
Trojan Battery Co., www.trojanbattery.com	23
U.S. Battery, www.usbattery.com	100
Wattsun (Array Technologies Inc.), www.wattsun.com	124
Western NC Renewable Energy Initiative, www.wind.appstate.edu	113
WindMax Energy, www.magnet4less.com	133
Windstream Power LLC, www.windstreampower.com	117
Xantrex, www.xantrex.com	25
Zomeworks Corp., www.zomeworks.com	125

For easy online access to advertisers, visit www.homepower.com/resources/advertisers

Choosing a Backup Water Heater

Solar water heating systems usually include some type of conventional water heater as a backup for cloudy weather or for when hot water demand is unusually high. But choosing the most cost- and fuel-efficient backup can be challenging, since the fuel types and efficiencies are like apples and oranges. Here's an easy method for figuring out your best choice.

Electric water heaters are easy to compare since they all use the same fuel source. **Tank-style electric water heaters** have an efficiency of about 90% because of the standby loss through the tank insulation, while **on-demand (tankless) electric water heaters** are rated at 100% efficiency—they convert all the energy to hot water. Electrical efficiency estimates are derived from heat energy transferred to the water and do not include utility or home generation and transmission inefficiencies.

Because of heat loss through the uninsulated flue pipe, **tank-style fossil-fuel water heaters** have lower efficiencies, ranging from 60% to 65%. **On-demand gas water heaters** offer more efficiency (at about 80%), and **high-efficiency (HE) condensing tank-type gas water heaters** are the most efficient at about 86%. (Note: At high altitudes, fossil-fuel water heaters lose some efficiency due to decreased oxygen levels in the air.)



But comparing one fuel source against another can be difficult—like figuring out whether you should replace your old natural-gas-fired tank-style unit with an on-demand

An electric on-demand (tankless) water heater.

electric heater. To accurately compare fuel costs, it is easiest to convert the Btu content of each therm or gallon of fossil fuel into kWh (electric energy unit) equivalents—1 kWh is equivalent to 3,412 Btu. Then you can factor in the efficiencies of the water heaters (see the table below). The second part of the table shows the fuel costs in dollars per kWh for each water heater type and for a range of fossil fuel costs. This allows a comparison of the fossil-fuel cost to the cost per kWh.

For example, the table indicates that the cost to operate a propane tank-style water heater is equal to about 17.2 cents per kWh at a propane cost of \$3 per gallon. In this case, an electric tank-style water heater would be a better value if electricity cost 15 cents per kWh or less. At 90% efficiency, the electric tank will cost the equivalent of 16.6 cents per kWh.

Dollars aside, electric water heaters can also be supplied by renewable energy generated by PV modules, wind-electric systems, or hydro-electric turbines for pollution-free water heating—whereas fossil-fuel heaters cannot. Another possibility is heat-pump water heaters. They boast “efficiencies” of about 200%, delivering twice as much heat energy as the electricity they consume, but are expensive and require greater infrastructure (ground or water source) to attain those efficiencies.

—Chuck Marken



A typical tank-type gas water heater.

Kilowatt-Hour Conversions & Heater Fuel Costs

Fuel	Heater Type	Fuel Unit	Btu Content Per Unit	Heater Efficiency	kWh Per Unit @ Efficiency	kWh Equivalent Heater Fuel Costs @ Cost Per Unit Fuel Cost Per Gallon or Therm					
						\$1.00	\$1.50	\$2.00	\$2.50	\$3.00	\$3.50
Heating oil	Tank	Gal.	139,000	60%	24.4	\$0.041	\$0.061	\$0.082	\$0.102	\$0.123	\$0.143
Natural gas	HE tank	Therm	100,000	86%	25.2	0.040	0.060	0.079	0.099	0.119	0.139
	Tank	Therm	100,000	65%	19.1	0.052	0.079	0.105	0.131	0.157	0.184
	Tankless	Therm	100,000	80%	23.4	0.043	0.064	0.085	0.107	0.128	0.149
Propane	HE tank	Gal.	91,600	86%	23.1	0.043	0.065	0.087	0.108	0.130	0.152
	Tank	Gal.	91,600	65%	17.5	0.057	0.086	0.115	0.143	0.172	0.201
	Tankless	Gal.	91,600	80%	21.5	0.047	0.070	0.093	0.116	0.140	0.163

SINCE
1987

IS YOUR SITE RIGHT? ASSESSING SOLAR POTENTIAL

home power

SOLAR ▸ WIND ▸ HYDRO ▸ DESIGN ▸ BUILD

Form Meets Function

Roof-Integrated Solar Power

Facing the Sun

Position Your Panels for Optimal Performance

Smarter Homebuilding

Fast, Efficient Framing Strategies

Secure Your Investment

Best Rooftop Mounting Methods

Apr / May 09, Issue 130

\$6.95 US • \$6.95 CAN



homepower.com

THE SOLAR DEPOT ADVANTAGE.

**ONLY SOLAR DEPOT INSTALLERS DELIVER THE COMPLETE,
QUALITY, SOLAR SYSTEM ON TIME. EVERY TIME.**



WHAT IS THE SOLAR DEPOT ADVANTAGE?

- ✓ Pre-Engineered Packaged Systems
- ✓ Superior Technical Support
- ✓ Rebate Filing Assistance
- ✓ Jobsite Delivery
- ✓ Lead Referral Program
- ✓ Product Shipment Nationwide
- ✓ Marketing & Advertising Support



Your One-Stop Shop for All of Your Solar Needs

Wholesale Distributor / System Integrator Since 1979

OUR STANDARD LABEL



Rolls has been producing premium batteries specifically designed for the renewable energy market since 1984. That's why those who can't afford to go without power know they can't afford to trust anyone else.



Superior Cycling | Dual-Container Construction | Widest Range of Specs
Largest Liquid Reserves | Easiest to Install | Longest Life Span | Premium Warranties

T. 1.800.681.9914 E. sales@rollsbattery.com www.rollsbattery.com



Perfect Balance.

MIX™ balances efficiency, wear,
and power harvest on the
Fronius **IG Plus** PV Inverter.

The FRONIUS **IG Plus** PV Inverter For commercial and residential systems

An outstanding addition to the family, the next generation Fronius IG Plus PV inverter builds on the solid design of the Fronius IG inverter with multiple enhancements, including:

- Models from 3 to 12 KW in a single inverter
- Lightweight – even the commercial size inverters
- Smart, integrated MIX™ technology to maximize energy harvest even on cloudy days
- Significantly improved efficiency
- Integrated DC disconnect
- A built-in six circuit string combiner
- Field programmable to 208, 240, and 277 volts with no loss in output power
- Removable power stage for field service
- Standard 10-year warranty, upgradable to 15 years



Visit **www.fronius-usa.com** or call 810-220-4414 for more information on this exciting addition to the Fronius family.



POWERING YOUR FUTURE